

Inventflow: Grundfos A-partner

Grundfos CR 5-22 A-FGJ-A-E-HQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/cr/grundfos-cr-5-22-a-fgj-a-e-hqqe>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	CR 5-22 A-FGJ-A-E-HQQE  Note! Product picture may differ from actual product Product No.: 96513381 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation. The pump has the following characteristics: - Impellers and intermediate chambers are made of Impeller: Stainless steel, EN 1.4301. Pump housing: - Pump head and base are made of Cast iron. - The shaft seal has assembly length according to EN 12756. - Power transmission is via cast iron split coupling. Flange standard: - Pipework connection is via DIN / ANSI / JIS flanges. Phase: The motor is a 3-phase AC motor. Controls: Frequency converter: NONE Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 2917 rpm Rated flow: 5.8 m³/h Rated head: 115.3 m Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: HQQE Approvals on nameplate: CE,EAC,UKCA,WRAS,ACS Curve tolerance: ISO9906:2012 3B Materials: Base: Cast iron EN 1561 EN-GJL-200 ASTM A48-25B Impeller: Stainless steel EN 1.4301 AISI 304 Bearing: SIC Installation: Maximum ambient temperature: 60 °C Maximum operating pressure: 25 bar Max pressure at stated temp: 25 bar / 120 °C 25 bar / -20 °C Type of connection: DIN / ANSI / JIS Size of inlet connection: DN 25/32 Size of outlet connection: DN 25/32 Pressure rating for connection: PN 25

Qty.	Description
	Flange rating inlet: 250 lb Flange size for motor: FT130 Electrical data: Motor standard: IEC Motor type: 112MC IE Efficiency class: IE3 Rated power - P2: 4 kW Power (P2) required by pump: 4 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415D V Rated current: 7.9 A Starting current: 1000-1110 % Cos phi - power factor: 0.87-0.87 Rated speed: 2920-2940 rpm Efficiency: IE3 88,1% Motor efficiency at full load: 88.1 % Motor efficiency at 3/4 load: 88.6 % Motor efficiency at 1/2 load: 85.2 % Number of poles: 2 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Motor No: 85U15413 Others: Minimum efficiency index, MEI ≥: 0.57 Net weight: 66.3 kg Gross weight: 70.9 kg Shipping volume: 0.148 m ³ Danish VVS No.: 385902022 Swedish RSK No.: 5824862 Finnish LVI No.: 4925409 Country of origin: HU Custom tariff no.: 84137075

96513381 CR 5-22 A-FGJ-A-E-HQQE 50 Hz

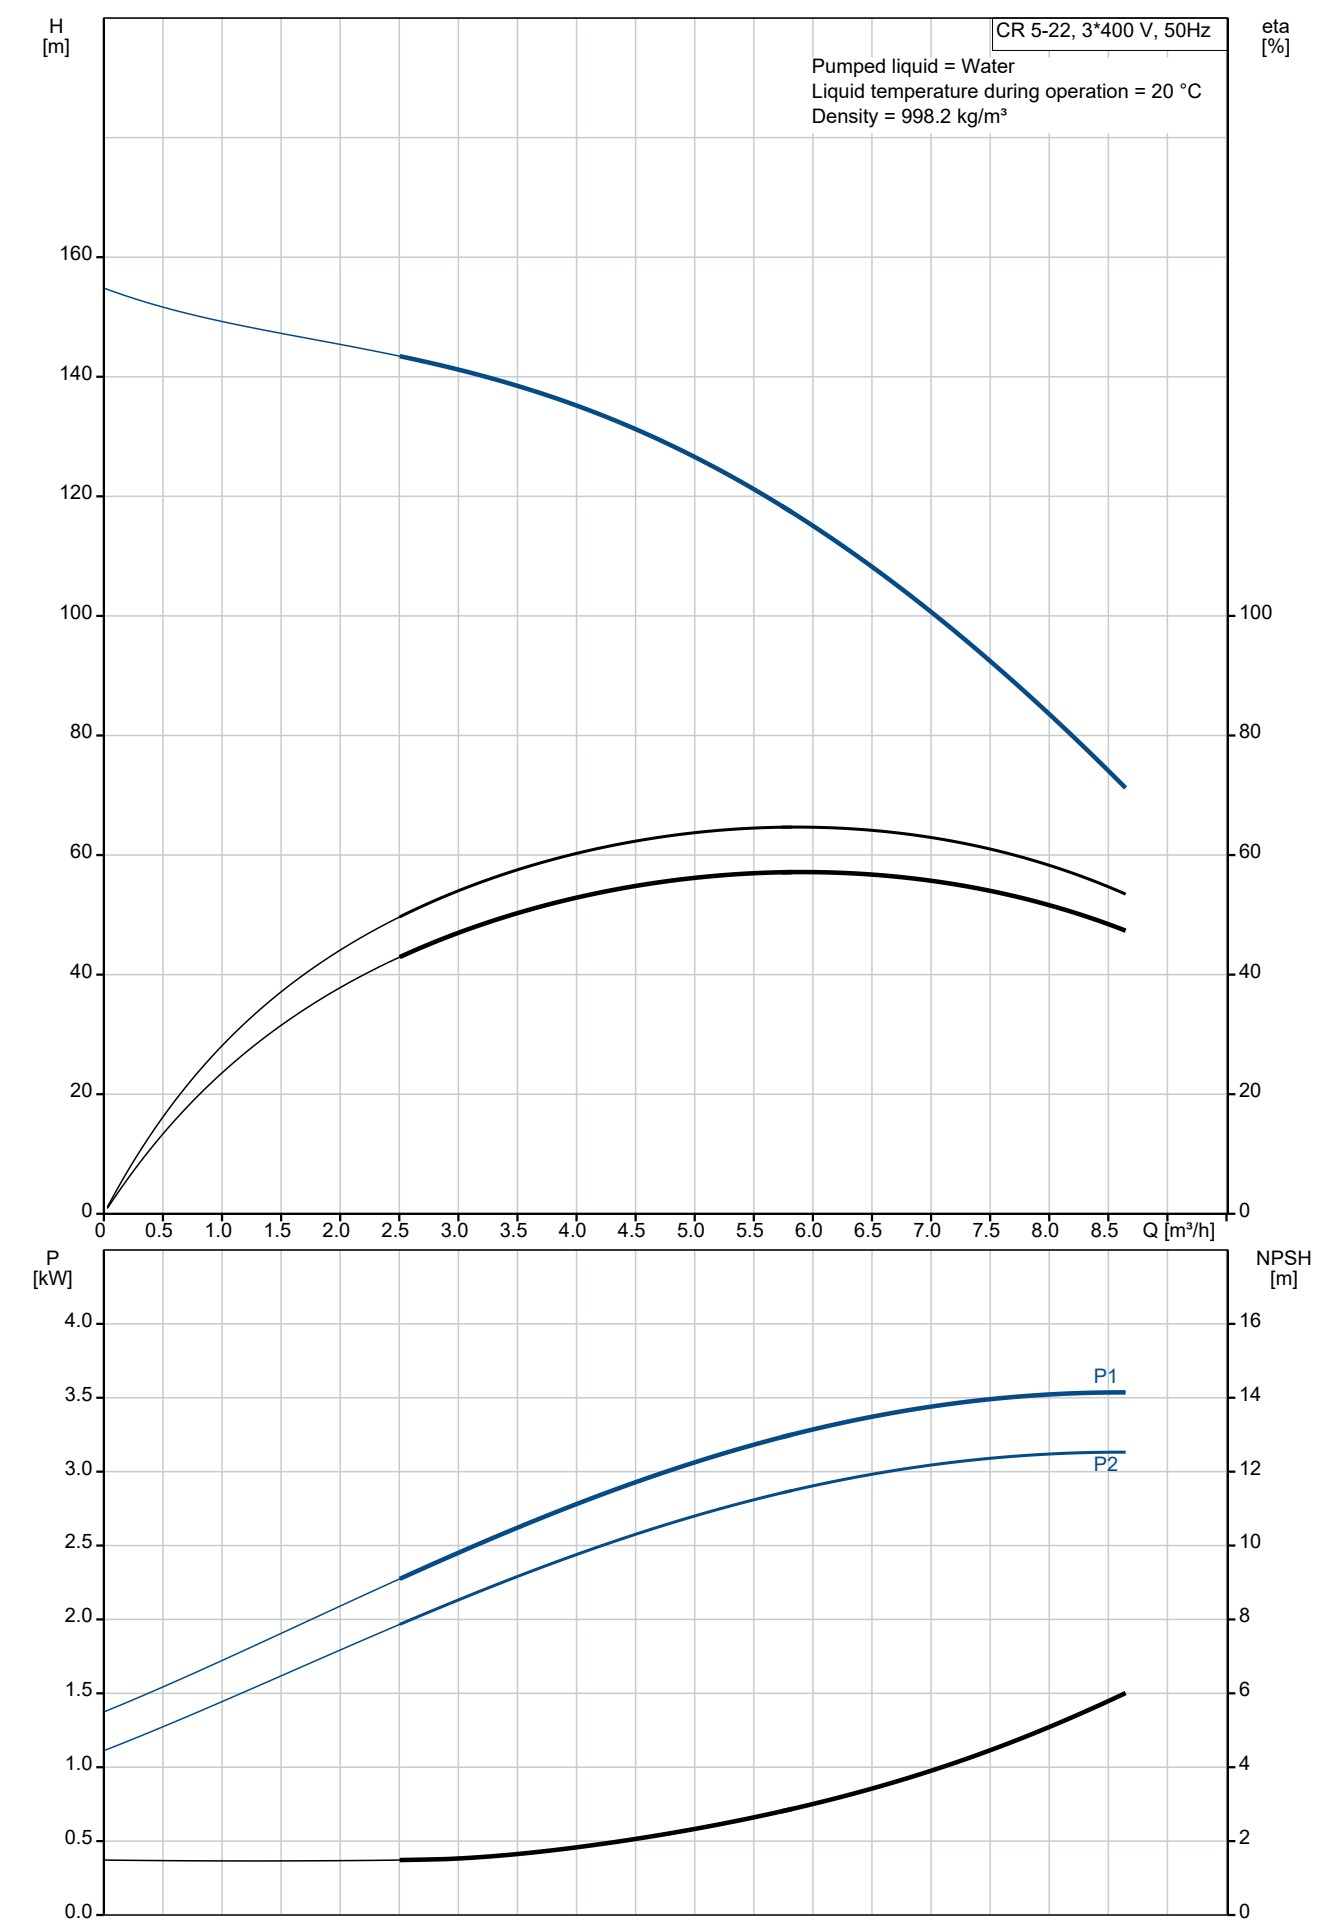


Description	Value
General information:	
Product name:	CR 5-22 A-FGJ-A-E-HQQE
Product No:	96513381
EAN number:	5700396638508
Technical:	
Pump speed on which pump data are based:	2917 rpm
Rated flow:	5.8 m³/h
Rated head:	115.3 m
Maximum head:	150.4 m
Stages:	22
Impellers:	22
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQE
Approvals on nameplate:	CE,EAC,UKCA,WRAS,A CS
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Base:	Cast iron
Base:	EN 1561 EN-GJL-200
Base:	ASTM A48-25B
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Material code:	A
Code for rubber:	E
Bearing:	SIC
Installation:	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	25 bar
Max pressure at stated temp:	25 bar / 120 °C
Max pressure at stated temp:	25 bar / -20 °C
Type of connection:	DIN / ANSI / JIS
Size of inlet connection:	DN 25/32
Size of outlet connection:	DN 25/32
Pressure rating for connection:	PN 25
Flange rating inlet:	250 lb
Flange size for motor:	FT130
Connect code:	FGJ
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor standard:	IEC
Motor type:	112MC
IE Efficiency class:	IE3
Rated power - P2:	4 kW
Power (P2) required by pump:	4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415D V
Rated current:	7.9 A
Starting current:	1000-1110 %
Cos phi - power factor:	0.87-0.87
Rated speed:	2920-2940 rpm
Efficiency:	IE3 88,1%
Motor efficiency at full load:	88.1 %
Motor efficiency at 3/4 load:	88.6 %

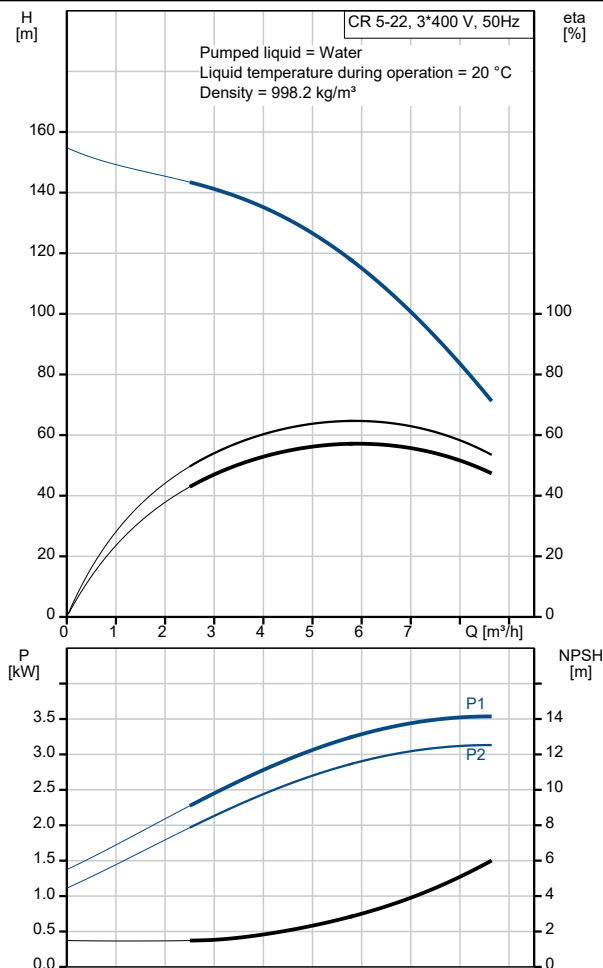


Description	Value
Motor efficiency at 1/2 load:	85.2 %
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	85U15413
Controls:	
Frequency converter:	NONE
Others:	
Minimum efficiency index, MEI ≥:	0.57
Net weight:	66.3 kg
Gross weight:	70.9 kg
Shipping volume:	0.148 m ³
Danish VVS No.:	385902022
Swedish RSK No.:	5824862
Finnish LVI No.:	4925409
Country of origin:	HU
Custom tariff no.:	84137075

96513381 CR 5-22 A-FGJ-A-E-HQQE 50 Hz

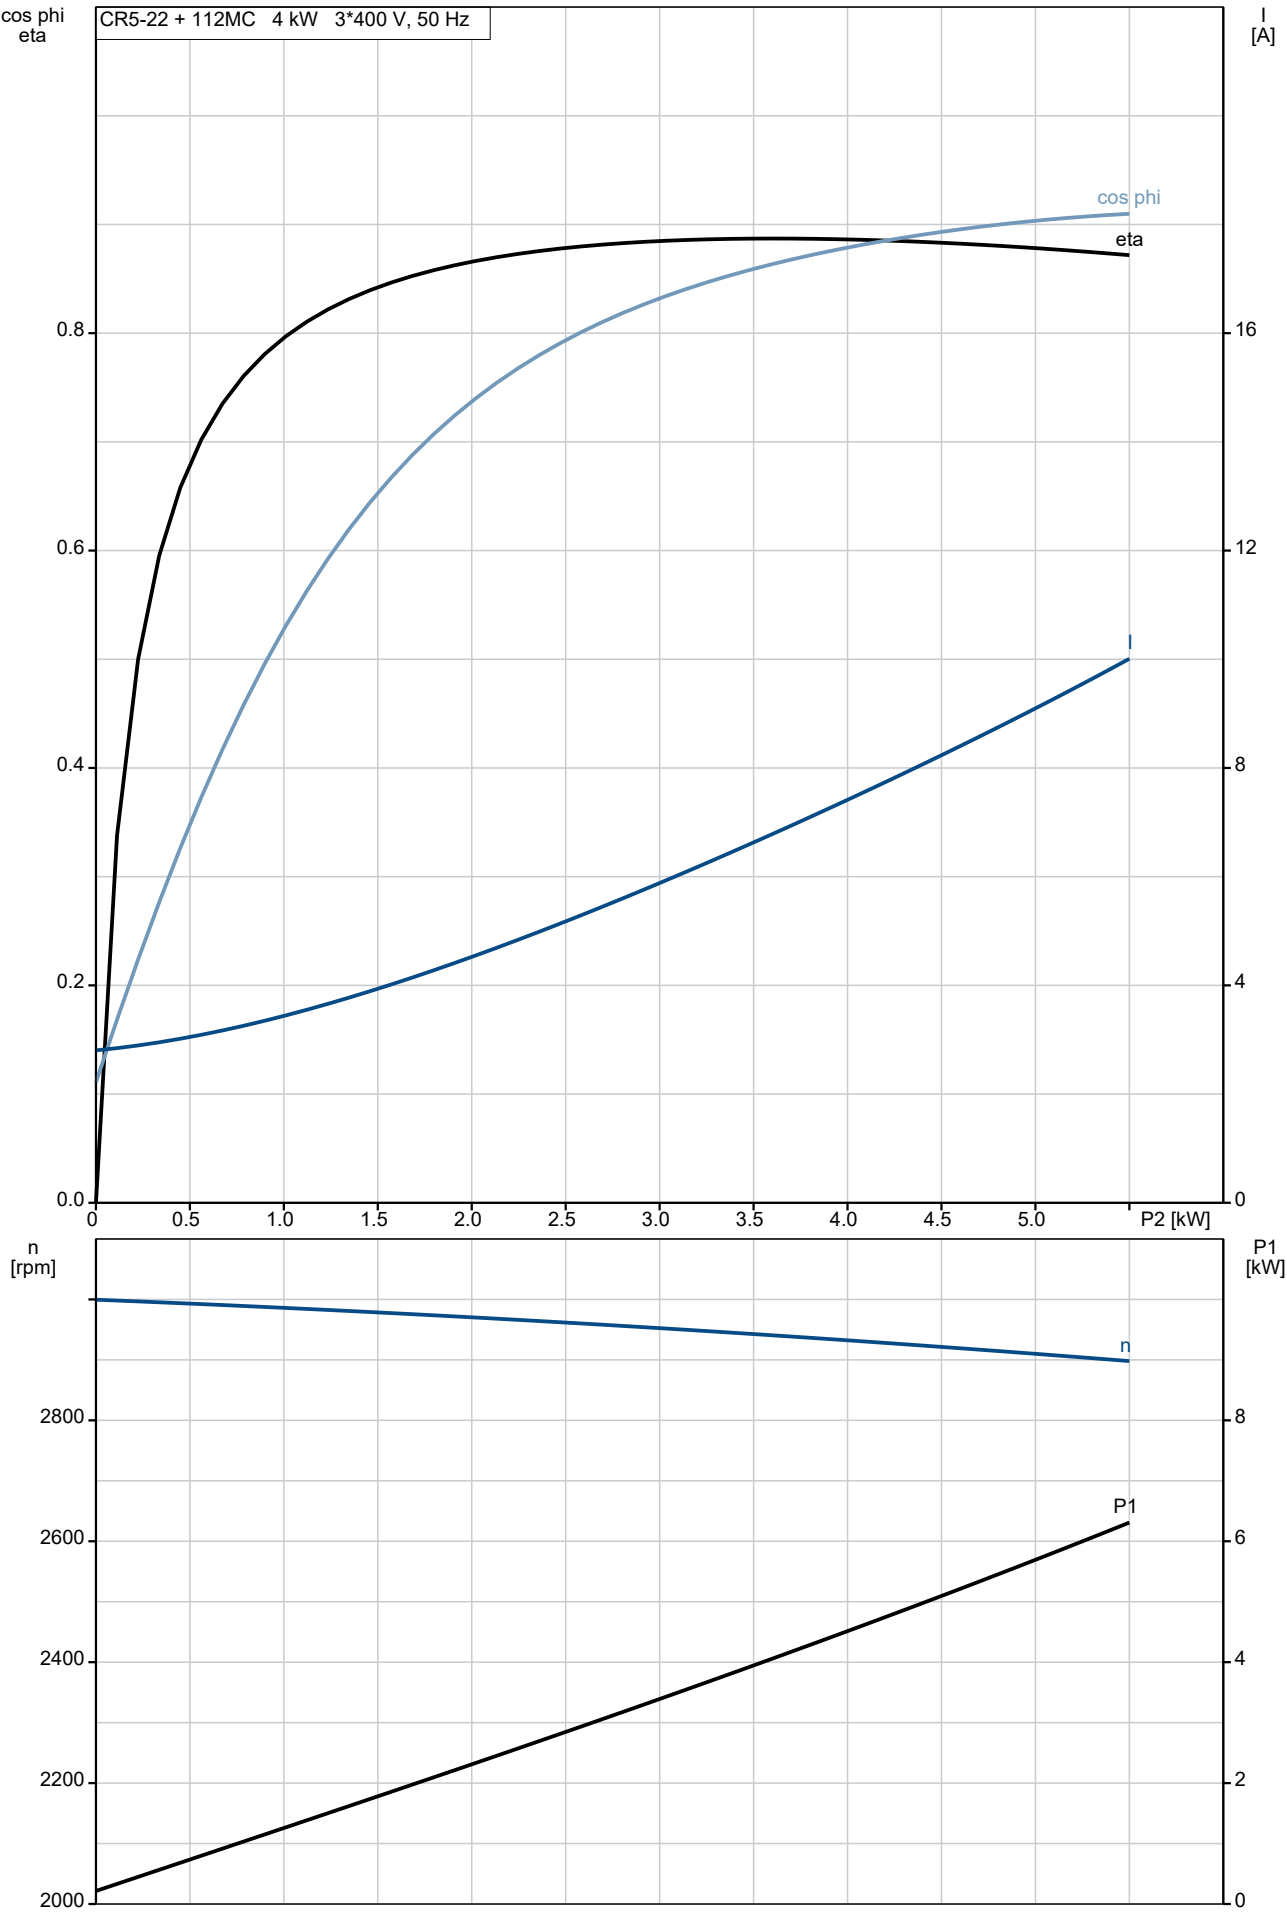

96513381 CR 5-22 A-FGJ-A-E-HQQE 50 Hz

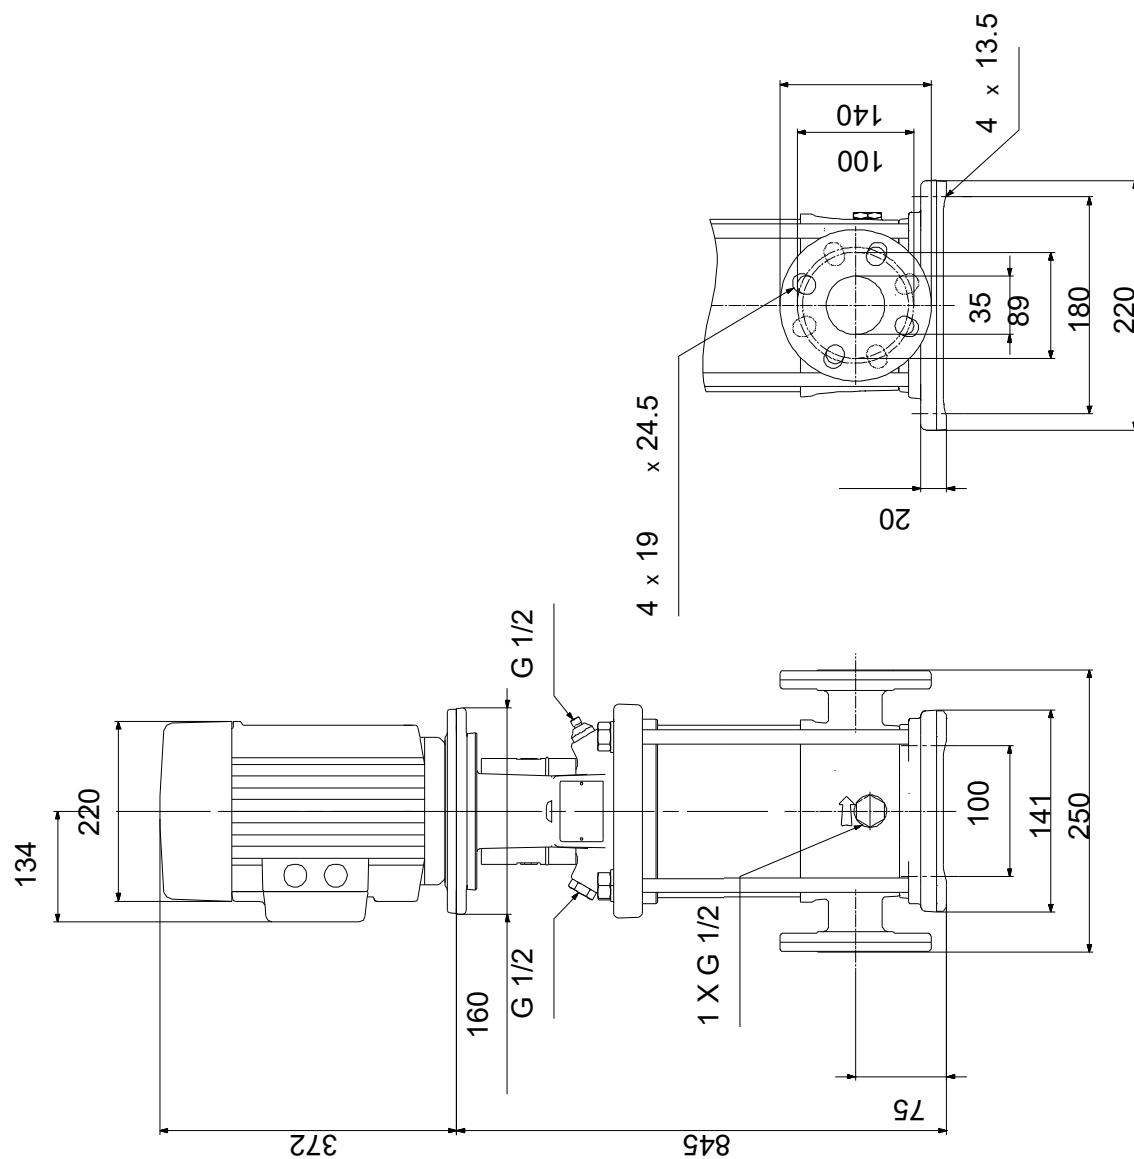

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts CR 5-22, Product No. 96513381
Produced After 1101 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenheid
- 80	Kit, chamber stack		Bearing type: SILICON CARBIDE	96453592	1	pcs
- 4a	Chamber w. bearing cpl.				4	
	Vane				1	
	Retainer for bearing				1	
	Guide vane				6	
	Chamber				1	
45	Neck ring				1	
47	Bearing bush				1	
65	Retainer				1	
65	Retainer for seal ring				1	
- 4	Chamber cpl.				17	
	Vane				1	
	Plate				1	
	Guide vane				6	
5a	Chamber				1	
45	Neck ring				1	
65	Retainer				1	
65	Retainer for seal ring				1	
- 5a	Chamber cpl.				1	
	Vane				1	
	Guide cup				1	
5a	Chamber				1	
45	Neck ring				1	
65	Retainer				1	
65	Retainer for seal ring				1	
- 44a	Guide vane cpl.				1	
	Plate				1	
	Guide vane				6	
50	Top plate				1	
47a	Bearing ring				4	
49	Impeller cpl.				22	
51	Shaft, spline, cpl.				1	
64d	Spacing pipe		Internal diameter: 12,85		1	
			Outer diameter: 15,85			
			Length (mm): 4,50			
64c	Clamp, splined		Internal diameter: 8,5		1	
			Outer diameter: 15			
64a	Spacing pipe		Length (mm): 13.00		4	
64	Spacing pipe		Length (mm): 26.0		17	
66	Wedge lock washer				1	
67	Lock nut		Thread: M8		1	
69	Spacing pipe		Length (mm): 2.00		1	
-	Kit, coupling			00415063	1	pcs
9	Hex socket head cap screw		Designation: DIN 912		4	
			Length (mm): 25			
			Thread: M8			
10a	Coupling half				2	
10	Shaft pin		Diameter: 5		1	
			Length (mm): 26			
-	Kit, coupling guard			96505131	1	pcs
7a	Combi Slot Torx screw				4	
7	Coupling guard				2	
-	Kit, gaskets			96455090	1	pcs
37	O-ring				2	
38	O-ring				1	
38	O-ring				2	
109	O-ring		Diameter: 22,00		1	
			Material type: EPDM			

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenheid
Thickness: 2,75						
-	Kit, plug			96505133	1	pcs
- 18	Air vent screw				1	
	Spindle				1	
	Plug				1	
23b	Spindle				1	
25	Plug				1	
25	Plug				1	
38	O-ring				1	
38	O-ring				2	
38	O-ring		Diameter: 16,3		1	
			Material type: FKM			
			Thickness: 2,4			
38	O-ring		Diameter: 16,3		2	
			Material type: FKM			
			Thickness: 2,4			
-	Kit, shaft seal HQQE			96455086	1	pcs
105	Shaft seal		Material type: HQQE		1	
-	Kit, wear parts		Material type: SIC	96455099	1	pcs
- 4a	Chamber w. bearing cpl.				4	
	Vane				1	
	Retainer				1	
	Guide vane				6	
	Chamber				1	
45	Neck ring				1	
47	Bearing bush				1	
65	Retainer				1	
65	Neck ring retainer				1	
45	Neck ring				18	
47a	Bearing ring				4	
64c	Clamp, splined		Internal diameter: 8,5		1	
			Outer diameter: 15			
64a	Spacing pipe		Length (mm): 13.00		4	
65	Neck ring retainer				18	
66	Wedge lock washer				1	
67	Lock nut		Thread: M8		1	
441b	Gasket				2	
-	Motor			85903740	1	pcs
-	Kit, bearing cpl.			96279802	1	
111	Ball bearing		Designation: 6206.2Z.C3.SYN		1	
153	Angular-contact bearing				1	
157	O-ring		Diameter: 62		1	
			Material type: NBR			
			Thickness: 3			
158	Waved washer				2	
-	Kit, end shield			96279790	1	
156a	End shield				1	
157	O-ring		Diameter: 62		1	
			Material type: NBR			
			Thickness: 3			
158	Waved washer				1	
159a	Seal ring				1	
-	Kit, eyebolt			96279825	1	
189	Eyebolt				1	
-	Kit, fan			96279758	1	
156	Fan				1	
159c	Seal ring				1	
159a	Seal ring				1	
-	Kit, fan cover			96279756	1	

Pos	Omschrijving	Opmerking tekst	Classificatie	Gegevens	Onderdeelnr.	Aanta	Eenheid
151b	Label					1	
151	Fan cover					1	
152	Pan head thread forming screw					4	
-	Kit, flange				96279779	1	
156b	Flange					1	
159. c	Seal ring					1	
186	Drain plug					3	
-	Kit, shaft seal				96279763	1	
159c	Seal ring					1	
159a	Seal ring					1	
-	Kit, staybolts				96279793	1	
181	Pan head staybolt					4	
-	Kit, terminal board				96279769	1	
	Bracket cpl.					1	
163	Hex socket head screw					1	
173a	Base					1	
173	Pan head thread forming screw			Designation: COMBI TORX T25		1	
176	Slot cheese head screw			Designation: COMBI TORX T25		6	
				Length (mm): 10			
				Thread: M5			
176	Terminal					1	
176	Connecting piece					3	
176	Wire clamp					3	
176	Terminal board					1	
177	Pan head screw					1	
-	Kit, terminal box				96279772	1	
164	Terminal box cover w/gasket					1	
166	Pan head thread forming screw					4	
2a	Pump head				98681106	1	pcs
4a	Chamber w. bearing cpl.				96547652	4	pcs
4a	Chamber w. bearing cpl.				98371274	4	pcs
- 4	Chamber cpl.				96547651	17	pcs
45	Neck ring				96547603	1	
65	Retainer				97911446	1	
4	Chamber cpl.				98371272	17	pcs
5a	Chamber cpl.				98371269	1	pcs
6	Base				96588146	1	pcs
7.a	Combi Slot Torx screw				96886324	4	pcs
7	Coupling guard				96603690	2	pcs
10	Shaft pin			Diameter: 5	96536473	1	pcs
				Length (mm): 26			
10	Shaft pin			Diameter: 5	96587588	1	pcs
				Length (mm): 26			
18	Air vent screw				96547461	1	pcs
18	Air vent screw				95061351	1	pcs
- 25a	Priming valve cpl.				96588242	1	pcs
38	O-ring				99198815	1	
38	O-ring				99412727	1	
25	Plug				96536013	1	pcs
26	Staybolt			Length (mm): 616	98698637	4	pcs
				Thread: M12			
26	Staybolt			Length (mm): 616	98986335	4	pcs
				Thread: M12			
28	Hex head screw			Length (mm): 25	99335941	4	pcs
				Thread: M8			
32	Washer			Designation: DIN 125 A	99883474	4	pcs
				Internal diameter: 13			
				Outer diameter: 24			
				Thickness: 2,5			

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenheid
36	Nut		Thread: M12	96620479	4	pcs
37	O-ring			96547656	2	pcs
38	O-ring			99198815	2	pcs
38	O-ring			99412727	2	pcs
44a	Guide vane cpl.			96547658	1	pcs
44a	Guide vane cpl.			98681144	1	pcs
47a	Bearing ring			97905743	4	pcs
47a	Bearing ring			96547649	4	pcs
49	Impeller cpl.			96547648	22	pcs
49	Impeller cpl.			98394422	22	pcs
51	Shaft, spline, cpl.			98368528	1	pcs
55	Outer sleeve			98811263	1	pcs
60	Formed wire spring			99935918	1	pcs
64c	Clamp, splined		Internal diameter: 8,5	98496968	1	pcs
			Outer diameter: 15			
64a	Spacing pipe		Length (mm): 13.00	96536452	4	pcs
64a	Spacing pipe		Length (mm): 13.00	98520104	4	pcs
64	Spacing pipe		Length (mm): 26.0	96536304	17	pcs
66	Wedge lock washer			96536157	1	pcs
66	Wedge lock washer			92575609	1	pcs
67	Lock nut		Thread: M8	98277008	1	pcs
69	Spacing pipe		Length (mm): 2.00	96536451	1	pcs
105	Shaft seal		Material type: HQQE	96983415	1	pcs