

Inventflow: Grundfos A-partner

Grundfos TPE 25-90/2 A-O-A-BQQE-DAB

Find the pump here:

<https://inventflow.nl/en/pompenfilter/tpe/grundfos-tpe-25-90-2-a-o-a-bqqe-dab>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72

Datasheet




Qty.	Description
1	TPE 25-90/2 A-O-A-BQQE-DAB  Note! Product picture may differ from actual product Product No.: 98076621 Single-stage, centrifugal volute in-line, single-head pump. The in-line design with opposite suction and discharge ports enables mounting in pipework or on a concrete foundation. The shaft seal is a corrosion resistant maintenance-free mechanical seal. The pump is fitted with an IEC-flanged single-phase MGE motor with frequency converter and PI-controller integrated in the motor terminal box. No additional motor protection is required as both motor and electronics are protected by integrated overload and temperature protection. External sensor can be connected if controlled pump operation based on for example flow, differential pressure or temperature is required. A control panel enables setting of required setpoint as well as setting of pump to MIN or MAX operation or to STOP. The control panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos R100 Remote Control enabling further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box holds terminals for the connection of: - Pump start/stop (potential-free contact), - external remote setpoint setting via analog signal, 0 - 10 V, 0(4) - 20 mA, - 10 V voltage supply for setpoint potentiometer, I_{max} = 5 mA,


Qty.	Description
	- sensor, 0 - 10 V, 0(4) - 20 mA, - 24 V voltage supply for sensor, I_{max} = 40 mA, - input for forced control to MIN or MAX (potential-free contact), - potential-free fault signal relay with changeover contact, - RS485 GENIbus. Controls: Frequency converter: Built-in Liquid: Pumped liquid: Water Liquid temperature range: -25 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 2865 rpm Rated flow: 7.88 m³/h Rated head: 7.93 m Actual impeller diameter: 89 mm Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B2 Materials: Pump housing: Cast iron EN-GJL-200 ASTM class 30 Impeller: Composite PES+30% GF Installation: Range of ambient temperature: -20 .. 50 °C Maximum operating pressure: 10 bar Max pressure at stated temp: 10 bar / 120 °C Type of connection: G Size of connection: DN 25 Pressure rating for connection: PN 10 Port-to-port length: 180 mm Flange size for motor: FT85 Electrical data: Motor type: 71A IE Efficiency class: IE5 Rated power - P₂: 0.37 kW Mains frequency: 50 Hz Rated voltage: 1 x 200-240 V Rated current: 2.40-2.10 A Cos phi - power factor: 0.96 Rated speed: 360-4000 rpm Efficiency: 84.0% Motor efficiency at full load: 84.0 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 98190190 Others: Minimum efficiency index, MEI ≥: 0.70 Net weight: 12.7 kg Gross weight: 14.7 kg Shipping volume: 0.05 m³ Danish VVS No.: 382000090 Finnish LVI No.: 4616368 Norwegian NRF no.: 9043647

Qty.	Description
	Country of origin: HU Custom tariff no.: 84137051

98076621 TPE 25-90/2 A-O-A-BQQE-DAB 50 Hz

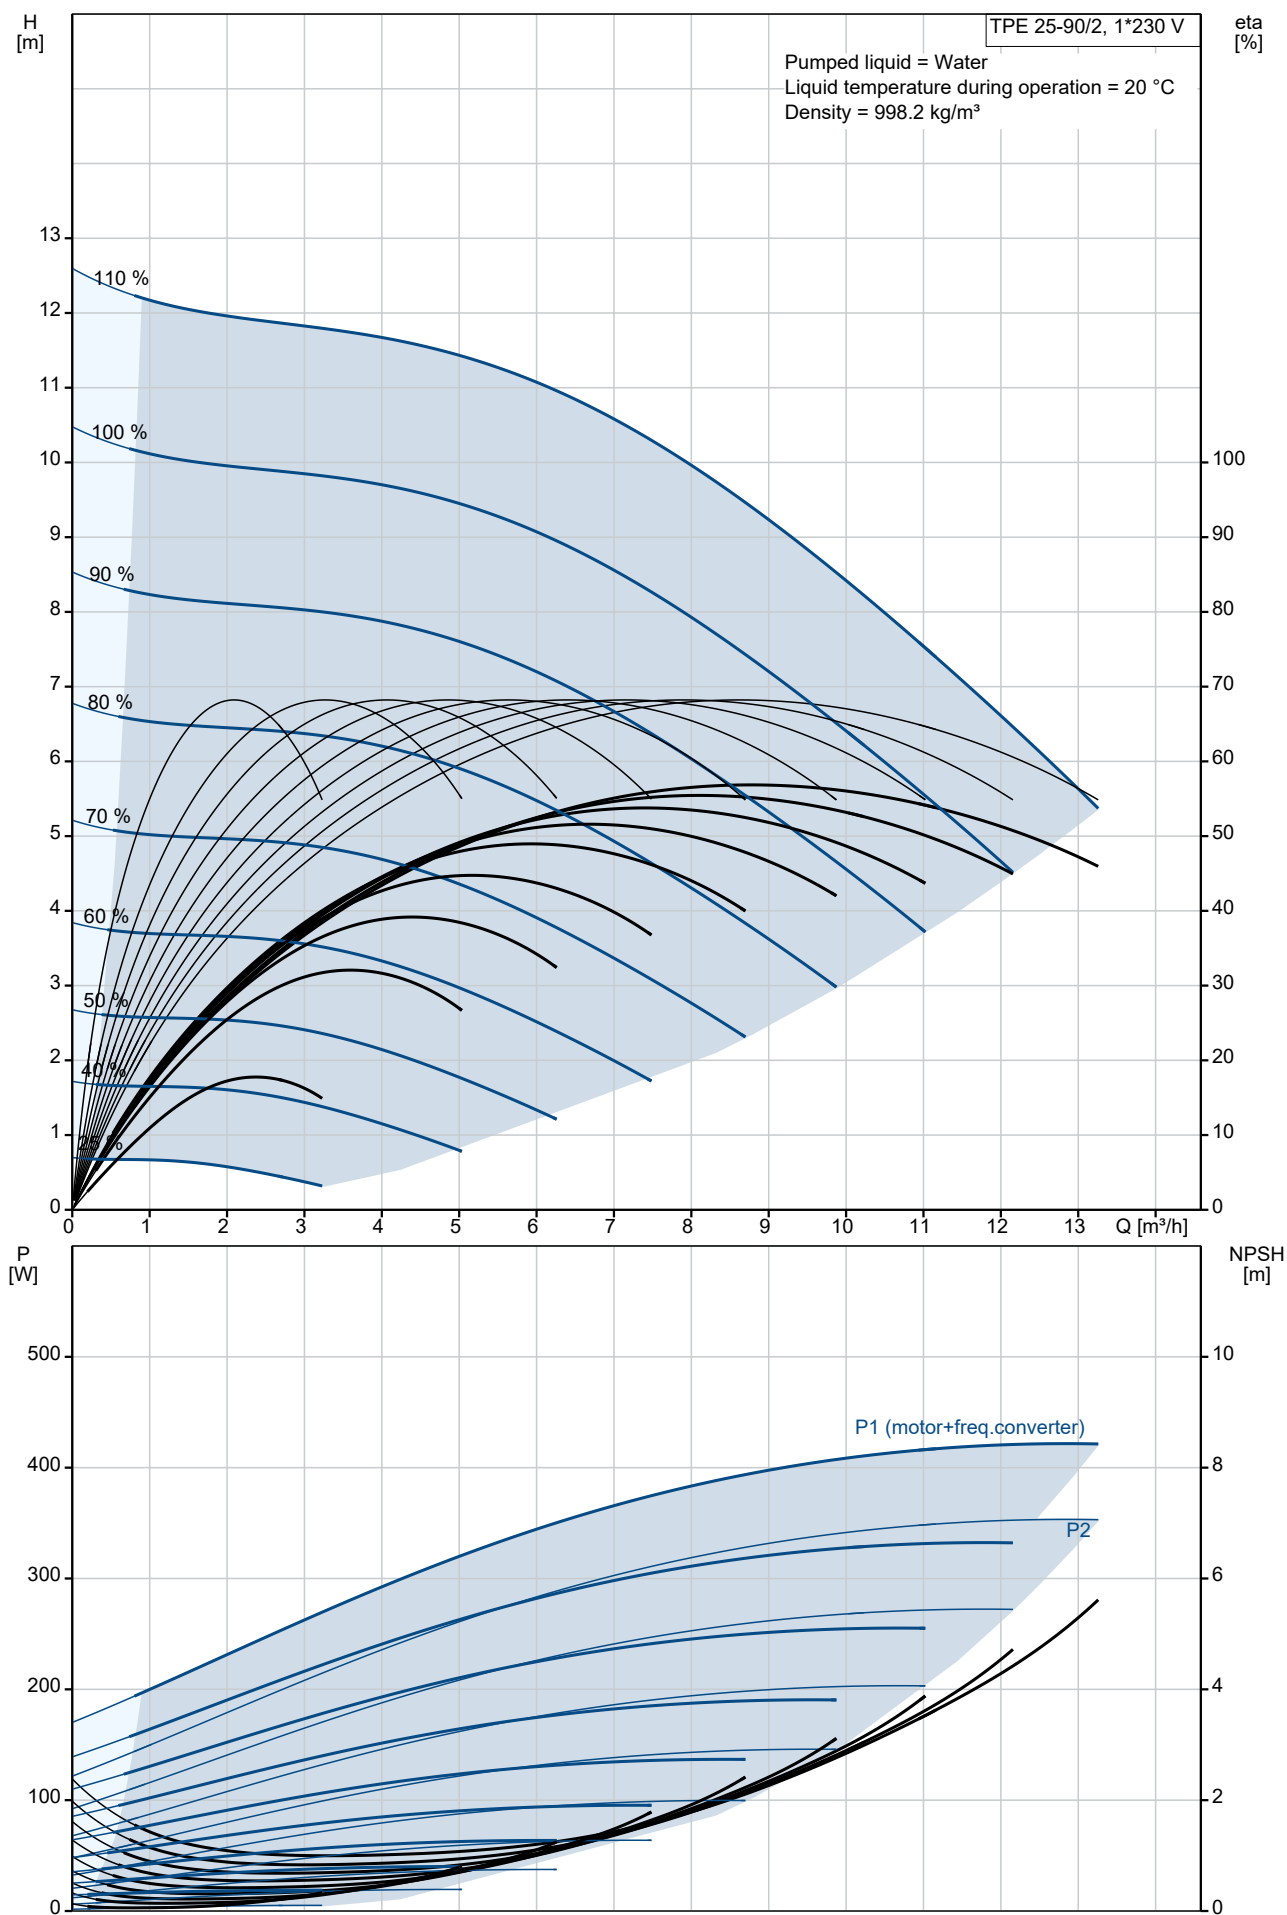


Description	Value
General information:	
Product name:	TPE 25-90/2 A-O-A-BQQE-DAB
Product No:	98076621
EAN number:	5710628530920
Technical:	
Pump speed on which pump data are based:	2865 rpm
Rated flow:	7.88 m³/h
Rated head:	7.93 m
Maximum head:	90 dm
Actual impeller diameter:	89 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-200
Pump housing:	ASTM class 30
Impeller:	Composite
Impeller:	PES+30% GF
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 50 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 120 °C
Type of connection:	G
Size of connection:	DN 25
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Flange size for motor:	FT85
Connect code:	O
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	71A
IE Efficiency class:	IE5
Rated power - P2:	0.37 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	2.40-2.10 A
Cos phi - power factor:	0.96
Rated speed:	360-4000 rpm
Efficiency:	84.0%
Motor efficiency at full load:	84.0 %
Number of poles:	2
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	ELEC
Motor No:	98190190
Controls:	
Control panel:	HMI200 - Standard
Function Module:	FM300 - Advanced
Frequency converter:	Built-in
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	12.7 kg
Gross weight:	14.7 kg
Shipping volume:	0.05 m³
Config. file no:	98478753
Danish VVS No.:	382000090

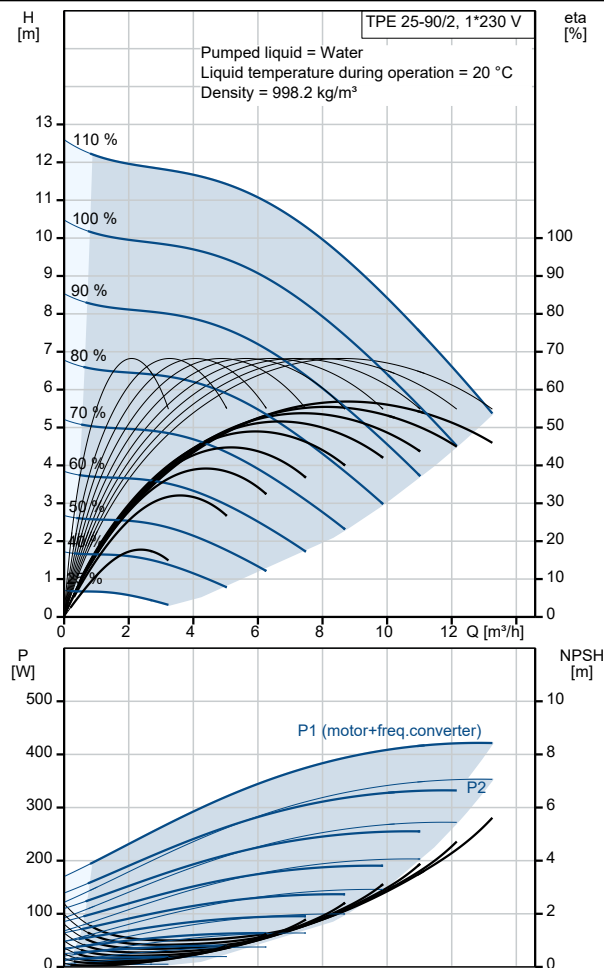


Description	Value
Finnish LVI No.:	4616368
Norwegian NRF no.:	9043647
Country of origin:	HU
Custom tariff no.:	84137051

98076621 TPE 25-90/2 A-O-A-BQQE-DAB 50 Hz

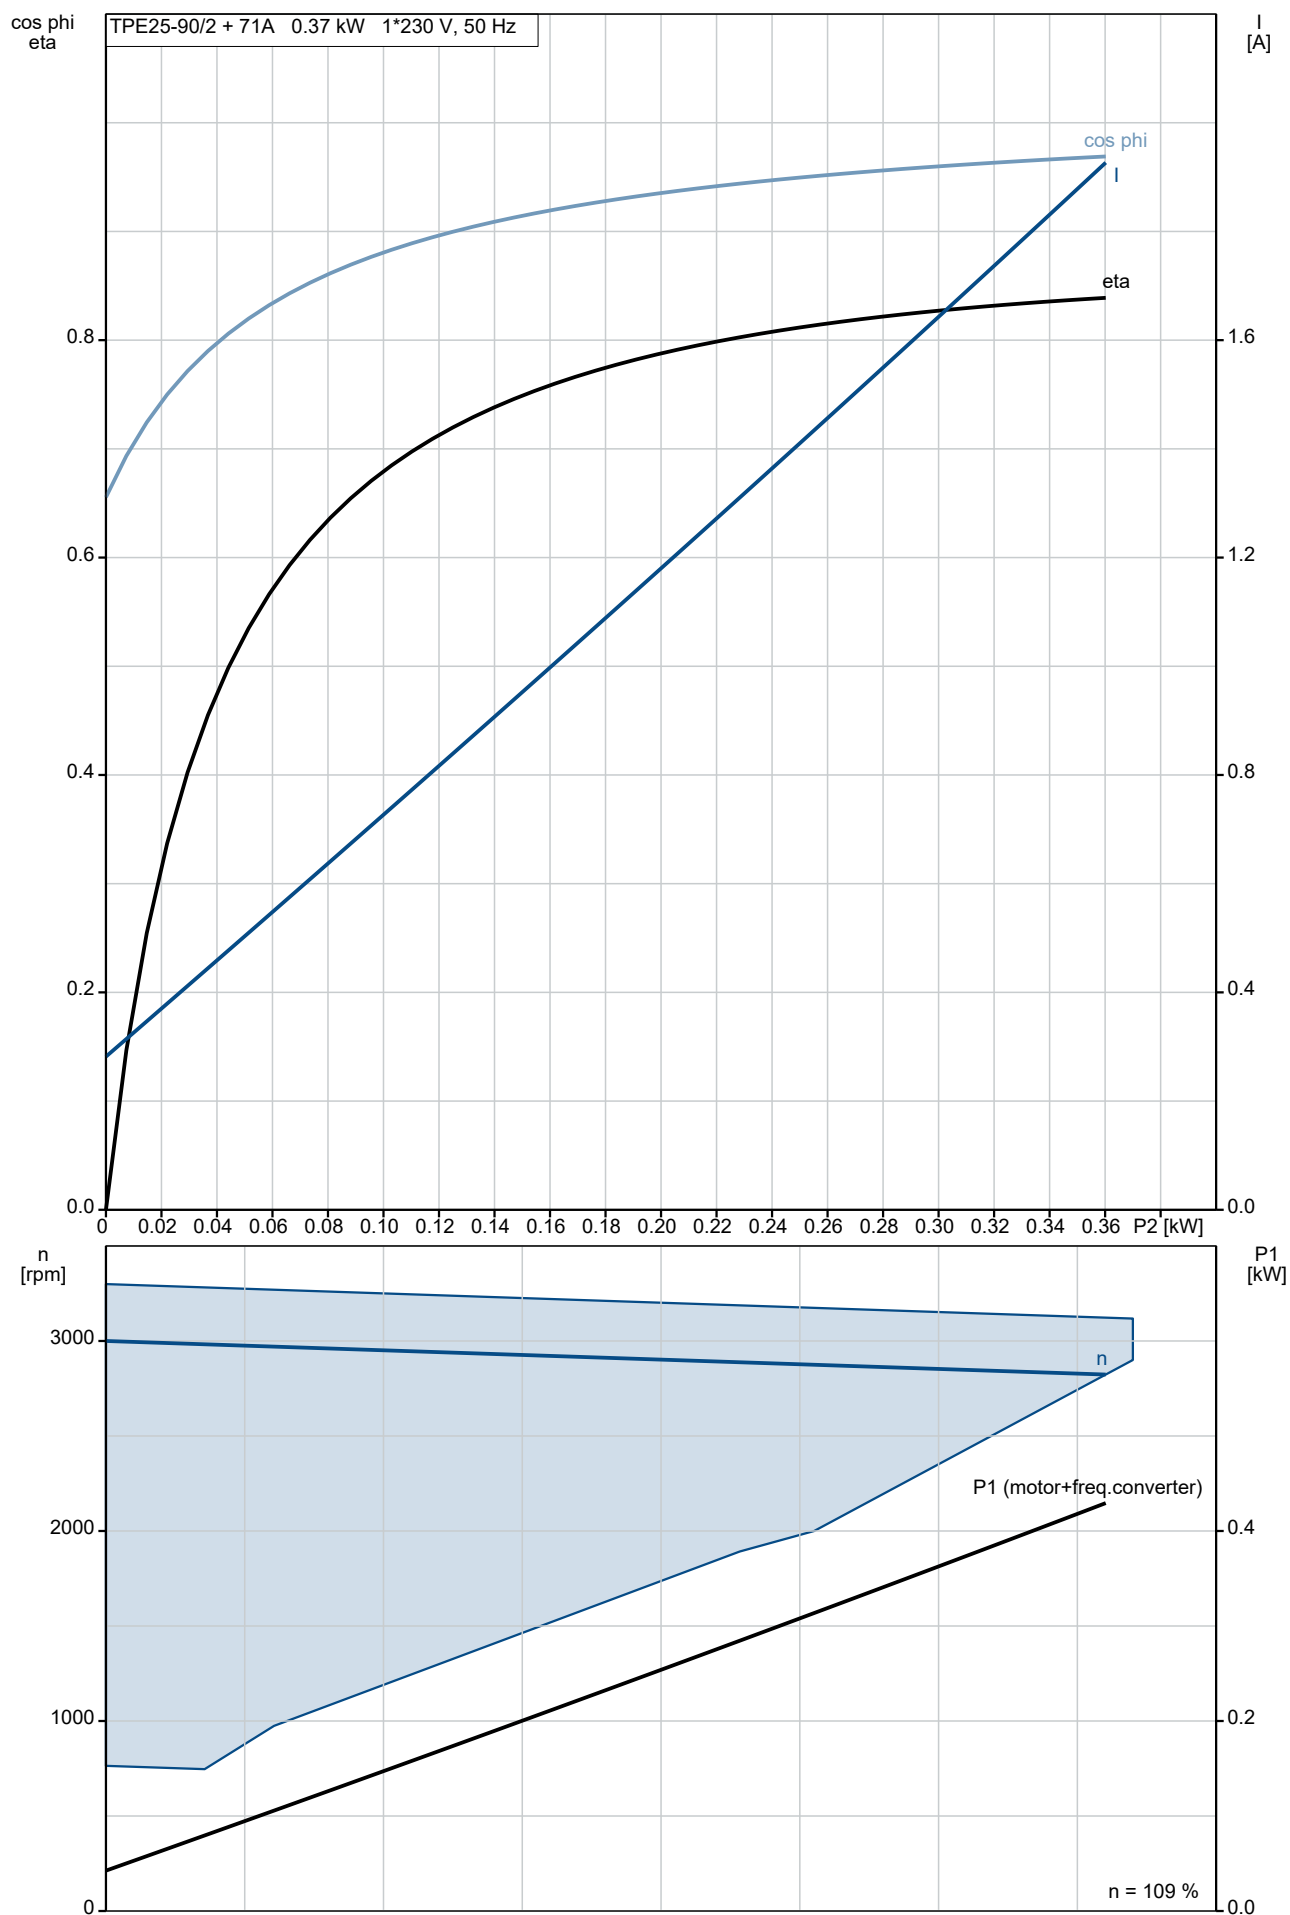

98076621 TPE 25-90/2 A-O-A-BQQE-DAB 50 Hz

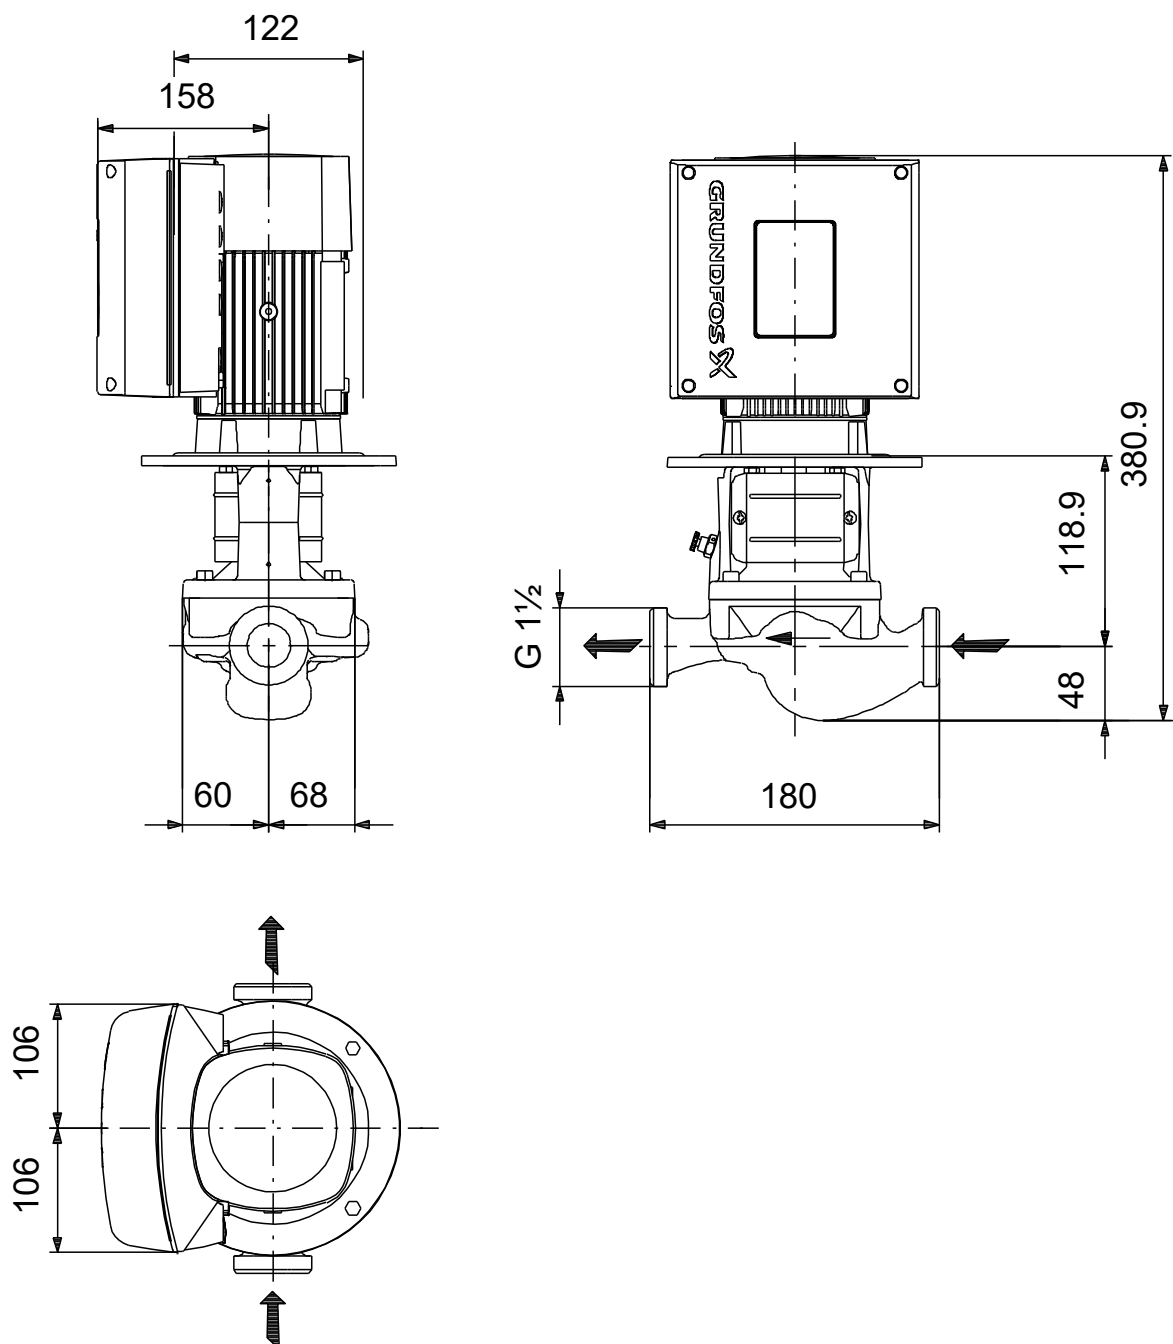

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts TPE 25-90/2, Product No. 98076621
Produced After 1811 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Kit, coupling			00415060	1	pcs
9	Hex socket head cap screw		Designation: DIN 912 Length (mm): 20 Thread: M6		4	
10a	Coupling half				2	
10	Shaft pin		Diameter: 5 Length (mm): 26		1	
-	Kit, shaft seal BQQE			98284950	1	pcs
	Plug				2	
72a	O-ring		Diameter: 102 Material type: EPDM Thickness: 4		1	
105	Shaft seal				1	
-	Kit, wear parts			98284940	1	pcs
-	Shaft w/impeller cpl.				1	
-	Shaft w/impeller cpl.				1	
49b	Split cone					
49	Impeller cpl.					
51	Pump shaft					
32	Washer		Designation: DIN 125 A2 Internal diameter: 13 Outer diameter: 24 Thickness: 2,5		1	
9	Hex socket head cap screw		Designation: DIN 912 Length (mm): 20 Thread: M6		4	
10	Shaft pin		Diameter: 5 Length (mm): 26		1	
-	Pump housing cpl.			98918725	1	pcs
45	Seal ring			99547517	1	
+	Motor stool cpl.			98993603	1	pcs
-	Motor				1	pcs
-	Kit, adapter			98345796	1	
- 252a	Adapter set				1	
	Adapter					
	Adapter					
167	Cable gland					
-	Kit, bearing cpl.			98330603	1	
111	Ball bearing		Designation: 6204.2Z.C3.SYN		1	
153	Ball bearing		Designation: 6204.2Z.C3.SYN		1	
156d	Gasket		Internal diameter: 114,80 Outer diameter: 121,20 Thickness: 0,25		1	
156c	Seal ring				2	
158a	O-ring		Diameter: 47 Material type: NBR Thickness: 3		1	
158	Waved washer				1	
-	Kit, Blanking plug			98334761	1	
252b	Plug cpl.				4	
-	Kit, cable gland			98337336	1	
- 293	Cable glands set			98271484	1	
167	Cable gland					

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
167	Cable gland					
-	Kit, connector plugs			98403113	1	
266	Connector plug 10-pole				1	
266	Connector plug 2-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
-	Kit, control box			98406653	1	
152	Pan head thread forming screw				1	
178	Pan head thread forming screw				4	
251d	Pan head thread forming screw				4	
251b	Control box				1	
251a	Control box				1	
252b	Plug cpl.				4	
266	Connector plug 10-pole				1	
266	Connector plug 2-pole				1	
268a	Base				1	
268	Pan head screw				1	
273b	Battery				1	
273	Funct. Module cpl.				1	
275a	Pin				1	
277a	Cross recess Pan head screw				5	
277a	Cross recess Pan head screw				1	
277a	Cross recess Pan head screw				1	
277	Isolation cover				1	
286	Spacer				1	
287	Cover				1	
288b	Retaining ring				6	
288a	Pan head thread forming screw				6	
288	Wire clamp				3	
289	Wire clamp				1	
290	Control panel, cpl.				1	
-	Kit, Control box upper			98334764	1	
251d	Pan head thread forming screw				4	
251b	Control box				1	
-	Kit, Control panel			98939973	1	
290	Control panel, cpl.				1	
-	Kit, cover			98330622	1	
287	Cover				1	
-	Kit, fan			98290123	1	
152	Pan head thread forming screw				4	
156c	Seal ring				1	
156	Fan				1	
-	Kit, flange (DE)			98290125	1	
156d	Gasket		Internal diameter: 114,80		1	
			Outer diameter: 121,20			
			Thickness: 0,25			

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
156b	Flange				1	
185	Cross recess Pan head screw				4	
186	Drain plug				1	
-	Kit, Funct. module			98334777	1	
273a	Cross recess Pan head screw				5	
273	Funct. Module cpl.				1	
275a	Pin				1	
286	Spacer				1	
-	Kit, Isolation cover			98330624	1	
277a	Cross recess Pan head screw				1	
277	Isolation cover				1	
-	Kit, Lower part cpl.			98330614	1	
178	Pan head thread forming screw				4	
251a	Control box				1	
275a	Pin				1	
277a	Cross recess Pan head screw				1	
277	Isolation cover				1	
-	Kit, motor			98293684	1	
	Terminal				3	
111	Ball bearing		Designation: 6204.2Z.C3.SYN		1	
150	Stator				1	
150	Stator housing				1	
151	Fan cover				1	
152	Pan head thread forming screw				4	
153	Ball bearing		Designation: 6204.2Z.C3.SYN		1	
156d	Gasket		Internal diameter: 114,80		1	
			Outer diameter: 121,20			
			Thickness: 0,25			
156c	Seal ring				1	
156c	Seal ring				1	
156b	Flange				1	
156	Fan				1	
157	O-ring		Diameter: 47		1	
			Material type: NBR			
			Thickness: 3			
158	Waved washer				1	
172	Shaft w/rotor				1	
178	Pan head thread forming screw				4	
185	Cross recess Pan head screw				4	
186	Drain plug				1	
203	Terminal plug				1	
289a	Pan head thread forming screw				1	
-	Kit, plug			99369622	1	
	Terminal				3	
203	Terminal plug				1	
205	Pan head thread forming screw				1	
-	Kit, screws			98330627	1	
268a	Base				1	
268	Pan head screw				1	
288b	Retaining ring				6	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
288a	Pan head thread forming screw				6	
288	Wire clamp				3	
289a	Pan head thread forming screw				1	
289	Wire clamp				1	
	Pan head thread forming screw			99598708	4	
111	Ball bearing		Designation: 6204.2Z.C3.SYN	97914979	1	
152	Pan head thread forming screw			99834207	1	
152	Pan head thread forming screw			99814578	1	
156d	Gasket		Internal diameter: 114,80	99406425	1	
			Outer diameter: 121,20			
			Thickness: 0,25			
186	Drain plug			99980519	1	
251d	Pan head thread forming screw			98995460	4	
7a	Pan head screw			96536492	4	pcs
7	Coupling guard			96591354	2	pcs
10	Shaft pin		Diameter: 5	96536473	1	pcs
			Length (mm): 26			
10	Shaft pin		Diameter: 5	96587588	1	pcs
			Length (mm): 26			
18	Plug			96620482	1	pcs
18	Plug			98164277	1	pcs
32	Washer		Designation: DIN 125 A2	99944263	1	pcs
			Internal diameter: 13			
			Outer diameter: 24			
			Thickness: 2,5			
49	Impeller cpl.			99659474	1	pcs
139	O-ring		Diameter: 102	99113116	1	pcs
			Material type: EPDM			
			Thickness: 4			