

Inventflow: Grundfos A-partner

Grundfos TPE 125-300/4 S-A-F-A-BQQE-PX3

Find the pump here:

<https://inventflow.nl/en/pompenfilter/tpe/grundfos-tpe-125-300-4-s-a-f-a-bqqe-px3>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	TPE 125-300/4 S-A-F-A-BQQE-PX3  Note! Product picture may differ from actual product Product No.: 98742614 Single-stage, centrifugal volute in-line, single-head pump. The in-line design with opposite suction and discharge ports enables mounting in pipework or on a concrete foundation. The shaft seal is a corrosion resistant maintenance-free mechanical seal. The pump is fitted with an IEC-flanged three-phase MGE motor with frequency converter and PI-controller integrated in the motor terminal box. No additional motor protection is required as both motor and electronics are protected by integrated overload and temperature protection. A differential pressure transmitter fitted on the pump registers the differential pressure across the pump and enables constant pressure or proportional pressure control of the pump. A control panel enables setting of required setpoint as well as setting of pump to MIN or MAX operation or to STOP. The control panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos R100 Remote Control enabling further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box holds terminals for the connection of : - Pump start/stop (potential-free contact), - external remote setpoint setting via analog signal, 0 - 5 V, 0 - 10 V, 0(4) - 20 mA, - 5 V voltage supply for setpoint potentiometer, I_{max} = 5 mA, - differential pressure sensor factory-fitted, - input for forced control to MIN or MAX (potential-free contact),

Qty.	Description
	- potential-free fault signal relay with changeover contact, - RS485 GENIbus.
	Controls: Frequency converter: Built-in
	Liquid: Pumped liquid: Water Liquid temperature range: -25 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³
	Technical: Pump speed on which pump data are based: 1470 rpm Rated flow: 180 m³/h Rated head: 27.3 m Actual impeller diameter: 295 mm Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B
	Materials: Pump housing: Cast iron EN-GJL-250 ASTM class 35 Impeller: Cast iron EN-GJL-200 ASTM class 30
	Installation: Range of ambient temperature: -20 .. 40 °C Maximum operating pressure: 16 bar Max pressure at stated temp: 16 bar / 120 °C Type of connection: DIN Size of connection: DN 125 Pressure rating for connection: PN 16 Port-to-port length: 800 mm Flange size for motor: FF300
	Electrical data: Motor type: 180MA IE Efficiency class: IE2 Rated power - P2: 18.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-480 V Rated current: 37.0-30.0 A Cos phi - power factor: 0.91-0.88 Rated speed: 240-1750 rpm Efficiency: IE2 91,2% Motor efficiency at full load: 91.2 % Number of poles: 4 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 86901010
	Others: Minimum efficiency index, MEI ≥: 0.70 Net weight: 343 kg Gross weight: 403 kg Shipping volume: 0.94 m³ Danish VVS No.: 381927300 Finnish LVI No.: 4616437 Country of origin: HU Custom tariff no.: 84137051

98742614 TPE 125-300/4 S-A-F-A-BQQE-PX3 50 Hz

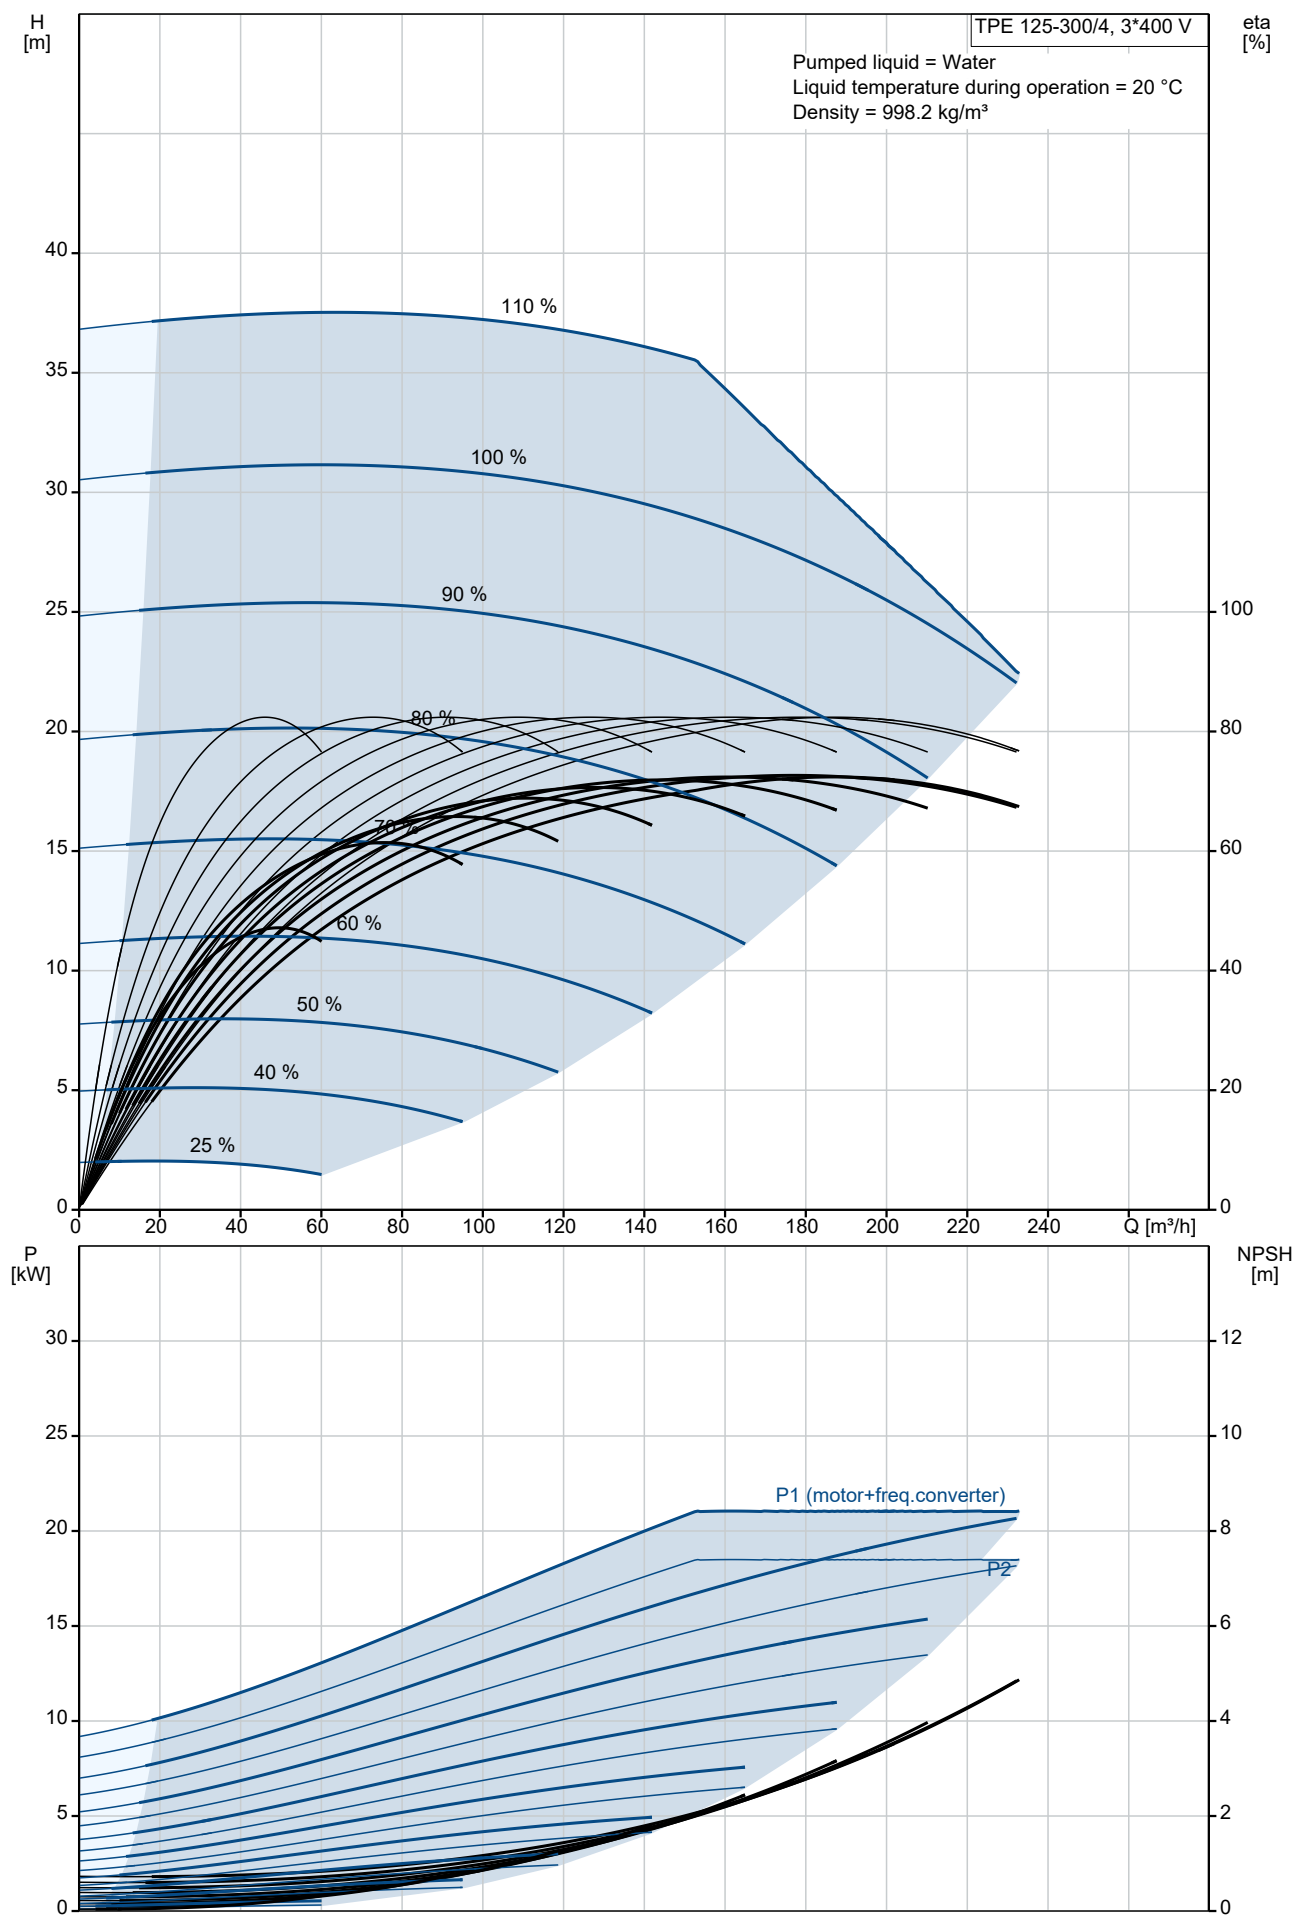


Description	Value
General information:	
Product name:	TPE 125-300/4 S-A-F-A-BQQE-PX3
Product No:	98742614
EAN number:	5712600813359
Technical:	
Pump speed on which pump data are based:	1470 rpm
Rated flow:	180 m³/h
Rated head:	27.3 m
Maximum head:	300 dm
Actual impeller diameter:	295 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 40 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 120 °C
Type of connection:	DIN
Size of connection:	DN 125
Pressure rating for connection:	PN 16
Port-to-port length:	800 mm
Flange size for motor:	FF300
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	180MA
IE Efficiency class:	IE2
Rated power - P2:	18.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-480 V
Rated current:	37.0-30.0 A
Cos phi - power factor:	0.91-0.88
Rated speed:	240-1750 rpm
Efficiency:	IE2 91,2%
Motor efficiency at full load:	91.2 %
Number of poles:	4
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	YES
Motor No:	86901010
Controls:	
Control panel:	BS
Function Module:	PUMP I/O
Frequency converter:	Built-in
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	343 kg
Gross weight:	403 kg
Shipping volume:	0.94 m³
Config. file no:	98772802

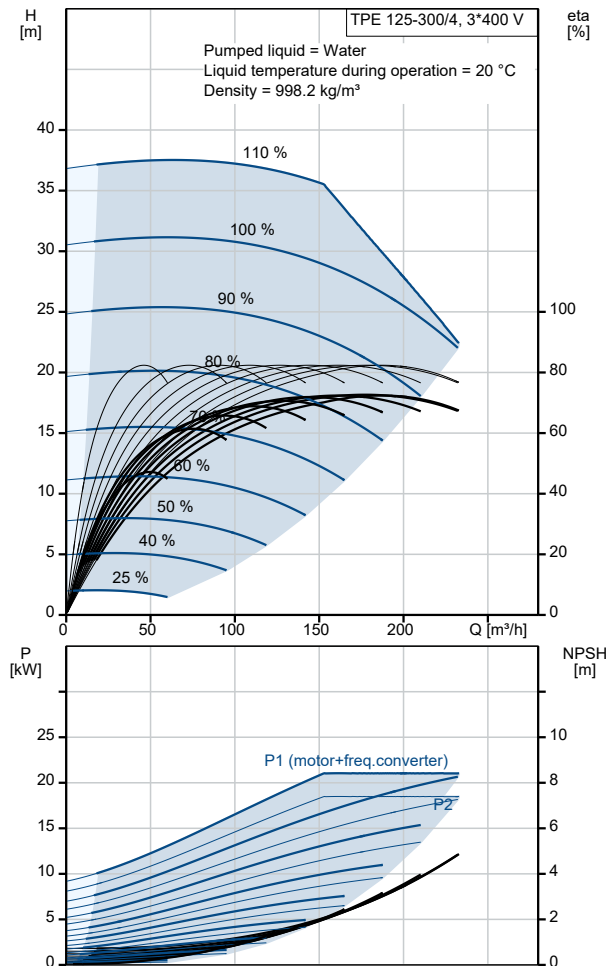


Description	Value
Danish VVS No.:	381927300
Finnish LVI No.:	4616437
Country of origin:	HU
Custom tariff no.:	84137051

98742614 TPE 125-300/4 S-A-F-A-BQQE-PX3 50 Hz

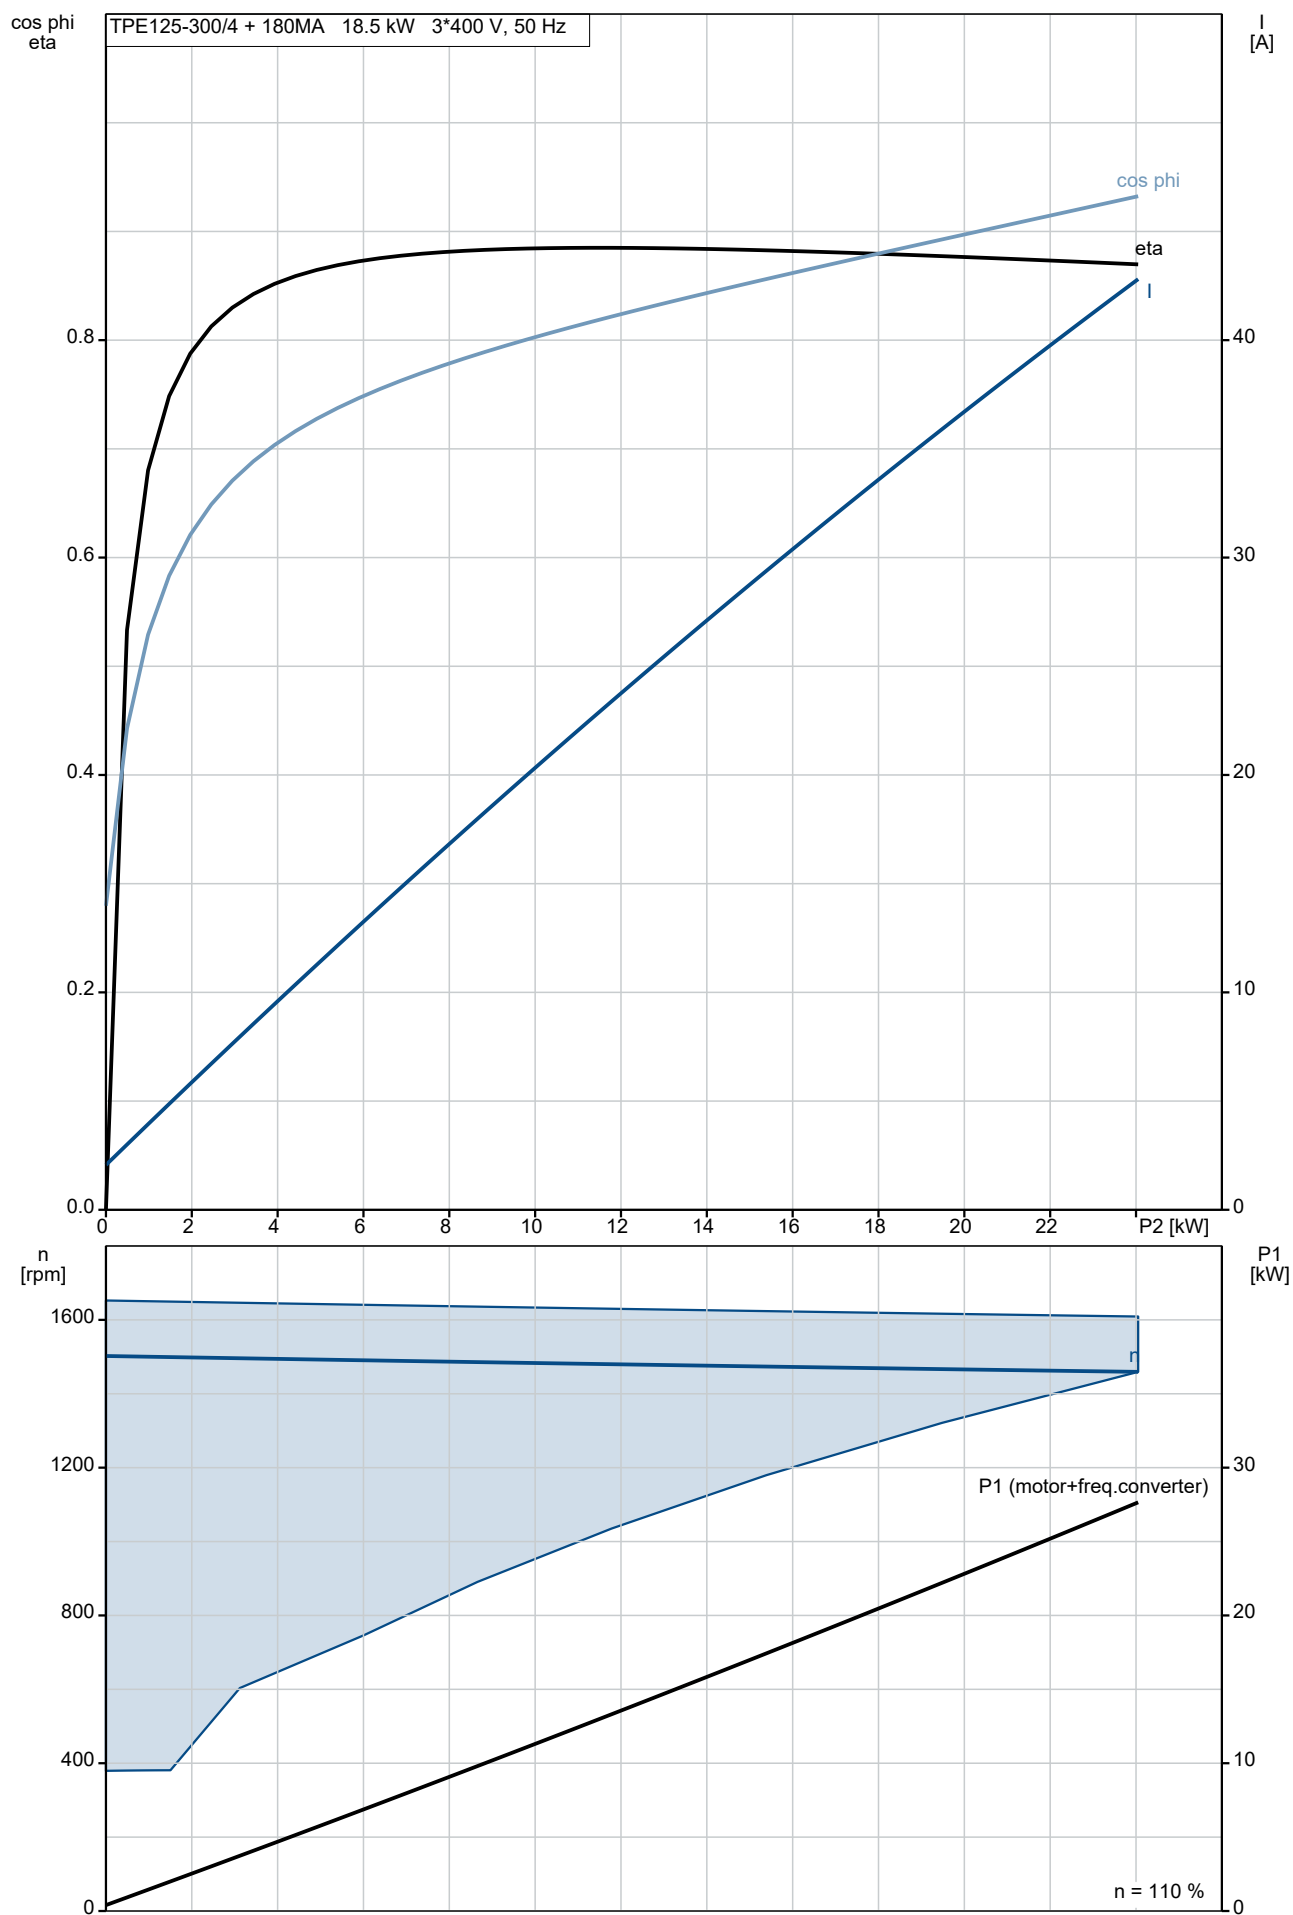

98742614 TPE 125-300/4 S-A-F-A-BQQE-PX3 50 Hz

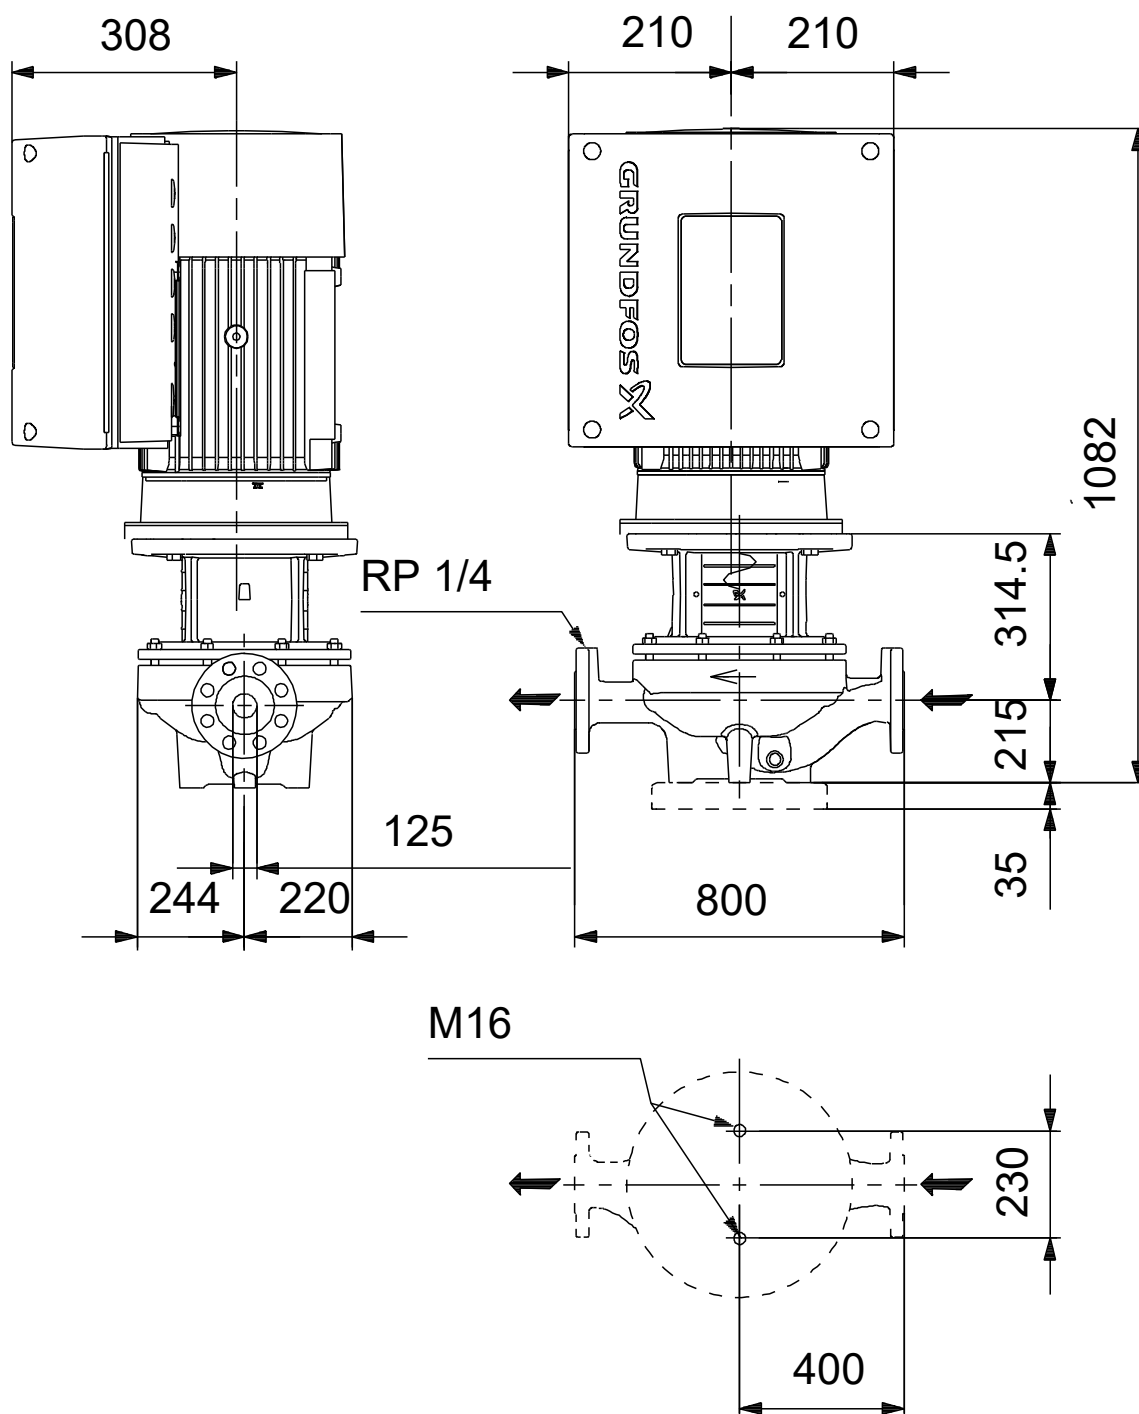

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts TPE 125-300/4, Product No. 98742614
Produced After 2050 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenhei
56	Base plate			96536246	1	pcs
28g	Hex head cap screw		Length (mm): 30 MM		2	
			Thread: M16			
56	Base plate				1	
	Kit, sensor			96611525	1	pcs
	Cable tie				5	
	Bracket				1	
7a	Combi Slot Torx screw				3	
84c	Disc spring				3	
268	Pan head screw				1	
501	Sensor				1	
505	Bracket		Type: MGE		1	
506	Socket head cap screw				1	
508	Tube				1	
509	Capillary tube.				1	
510	Mounting bush.				2	
511	Cable pin				3	
	Motor				1	pcs
	Kit, bearing cpl.		Designation: 6310.Z.C4-6310.Z.C4	96796811	1	
111	Ball bearing				1	
154	Ball bearing				1	
158	Waved washer				1	
	Kit, bearing plate			96796809	1	
155. a	Cover				1	
208a	Gasket				3	
208	Hex socket head cap screw		Designation: DIN912		3	
			Length (mm): 40			
			Thread: M5			
	Kit, connector plugs			96348923	1	
	Connector plug 5-pole				1	
	Connector plug 4-pole				1	
	Connector plug 4-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug				1	
273	Kit, control board			96348918	1	
	Service kit instruction				1	
	Controlboard				1	
	Kit, eyebolt			96796712	1	
189	Eyebolt				2	
	Kit, fan cover			96830826	1	
151	Fan cover				1	
152. a	Rubber bush				4	
152	Hex head cap screw				4	
196	Diaphragm				1	
	Kit, flange			96796807	1	
156. b	Flange				1	
159. b	Seal ring				1	
185	Hex socket head cap screw				4	
186	Drain plug				4	
195. a	Grease nipple				1	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenhei
	Kit, funct. module - E-pump			96348929	1	
263	MGE large I/O add-on					1
	Kit, funct. module -Geni/RS485			96348932	1	
263	Add-on module, cpl. w/plugs					1
	Kit, gaskets			96798508	1	
184	O-ring		Diameter: 235			2
275	Kit, inverter board			96348920	1	
	Kit, key			96796817	1	
171	Parallel key					1
	Kit, lubrication nipple			96796671	1	
195. b	Grease nipple					2
195. a	Grease nipple					1
	Kit, motor			96844396	1	
	Flex insulation					3
	EMC filter					1
	Cover cpl.					1
	Motor					1
99a	Retaining ring					1
151	Fan cover					1
152. a	Rubber bush					4
152	Hex head cap screw					4
156	Fan					1
177	Torx Screw					1
185. b	Nut					4
196	Diaphragm					1
273a	Pan head thread forming screw					4
	Kit, ND-end shield cpl.			96796810	1	
156a	End shield NDE					1
158	Waved washer					1
159	V-ring					1
185. c	Nut					4
185. a	Hex socket head cap screw					4
195. b	Grease nipple					1
	Kit, opr. panel			96348925	1	
259	Operation panel					1
274	Kit, rectifier board			96348921	1	
	Kit, terminal box			96348914	1	
164	Cover cpl.					1
166	Pan head thread forming screw					5
251	Terminal box					1
277	Blind cover					1
283	Motor cover cpl.					1
284	Cover					1
	Kit, varistor			96348917	1	
279. b	Pan head thread forming screw					2
279	Varistor					1
18	Plug			96620482	1	pcs
18	Plug			98164277	1	pcs
36	Nut		Thread: M12	96620479	14	pcs
49	Impeller			98517638	1	pcs
56	Base plate			99788464	1	pcs
67	Nut		Thread: M18	92526535	1	pcs
72a	O-ring		Diameter: 329,79	92547632	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	92526511	1	pcs

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aanta	Eenhei
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	97511846	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	97757675	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
105b	Spacer			96591277	1	pcs
105	Shaft seal			92514302	1	pcs
105	Shaft seal			98434906	1	pcs
152	Cross recess countersunk screw			99332927	1	pcs
510	Mounting bush.			99079267	2	pcs