

Inventflow: Grundfos A-partner

Grundfos NB 65-200/170 AF2ABQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/nb/grundfos-nb-65-200-170-af2abqqe>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	NB 65-200/170 AF2ABQQE  Product No.: 98875534 Non-self priming, single-stage centrifugal Flange standard: pump according to EN 1092-2. The pump is for the pumping of thin, clean or slightly contaminated liquids without abrasive or long-fibred solids. The pump is directly coupled with an Phase: IEC-flanged 3-phase AC motor. The impeller is hydraulically as well as dynamically balanced. The pump has the following characteristics: - flange dimensions according to EN 1092-2, Pump housing: - Cast iron volute pump housing, - stainless steel shaft Impeller: and Cast iron impeller and bronze wear rings, - unbalanced mechanical shaft seal according to EN 12756. Controls: Frequency converter: NONE Pressure sensor: N Liquid: Pumped liquid: Water Liquid temperature range: -25 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 1445 rpm Rated flow: 45.84 m³/h Rated head: 8.144 m Actual impeller diameter: 170 mm Nominal impeller diameter: 200 Shaft seal arrangement: Single Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B2 Bearing design: Standard Materials: Pump housing: Cast iron EN-GJL-250 ASTM class 35 Wear ring: Brass Impeller: Cast iron

Qty.	Description
	EN-GJL-200 ASTM class 30 Shaft: Stainless steel EN 1.4301 AISI 304 Internal pump house coating: CED Installation: Maximum ambient temperature: 55 °C Maximum operating pressure: 16 bar Pipe connection standard: EN 1092-2 Size of inlet connection: DN 80 Size of outlet connection: DN 65 Pressure rating for connection: PN 16 Bearing lubrication: Grease Pump housing with feet: Yes Support block: N Electrical data: Motor type: SIEMENS IE Efficiency class: IE3 Rated power - P2: 1.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 220-240D/380-420Y V Rated current: 5,78-5,23/3,31-2,99 A Starting current: 720-720 % Cos phi - power factor: 0.8 Rated speed: 1445 rpm Efficiency: IE3 85,3% Motor efficiency at full load: 85.3-85.3 % Motor efficiency at 3/4 load: 86.0-86.0 % Motor efficiency at 1/2 load: 85.2-85.2 % Number of poles: 4 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 83V02206 Others: Minimum efficiency index, MEI ≥: 0.70 Net weight: 63 kg Gross weight: 80 kg Shipping volume: 0.315 m³ Country of origin: HU Custom tariff no.: 84137051

98875534 NB 65-200/170 AF2ABQQE 50 Hz

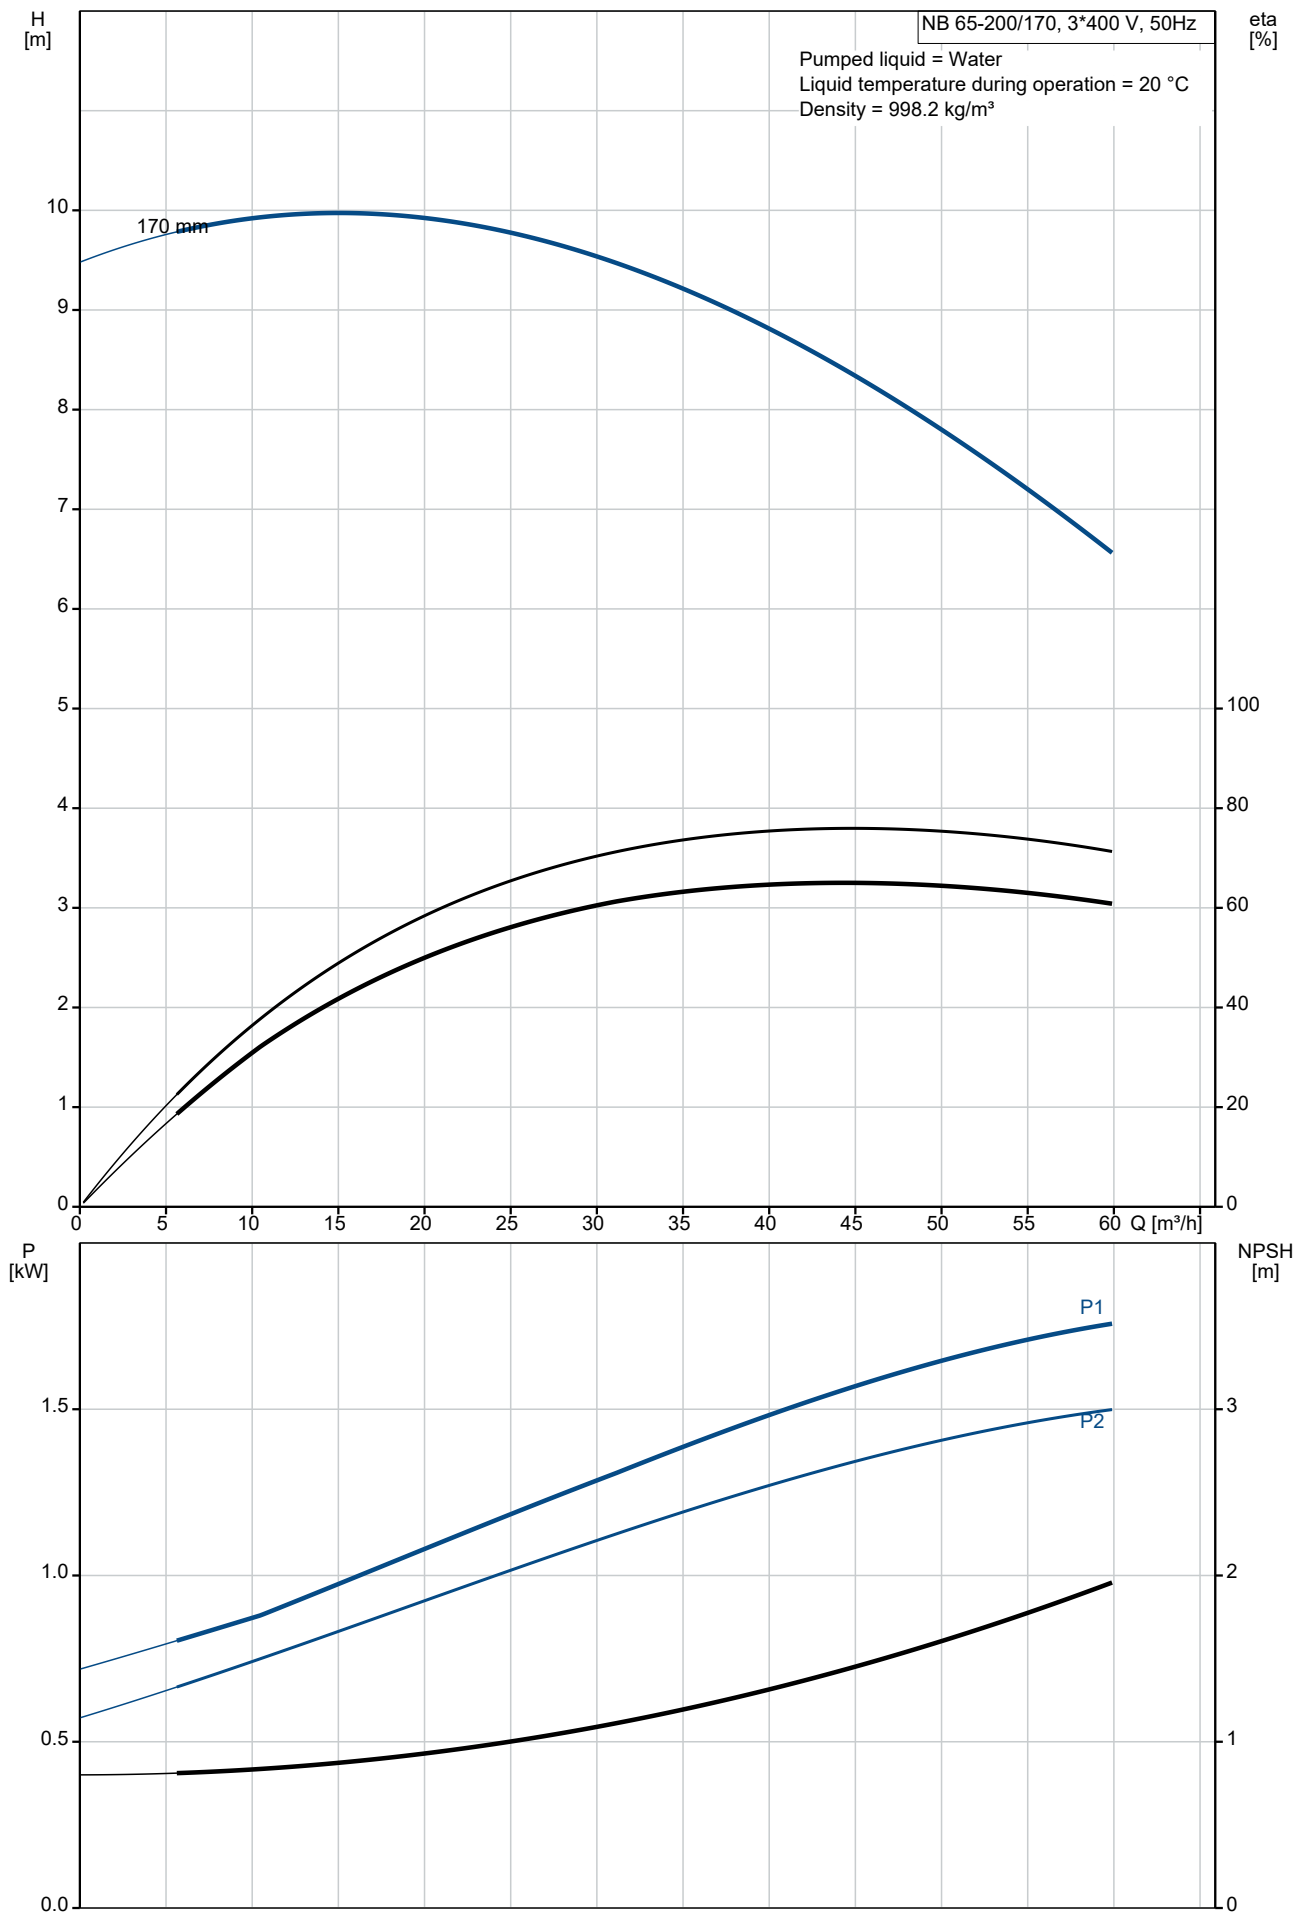


Description	Value
General information:	
Product name:	NB 65-200/170 AF2ABQQE
Product No:	98875534
EAN number:	5712602781113
Technical:	
Pump speed on which pump data are based:	1445 rpm
Rated flow:	45.84 m³/h
Rated head:	8.144 m
Actual impeller diameter:	170 mm
Nominal impeller diameter:	200
Shaft seal arrangement:	Single
Shaft diameter:	24 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A
Bearing design:	Standard
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Wear ring:	Brass
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Internal pump house coating:	CED
Material code:	A
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	16 bar
Pipe connection standard:	EN 1092-2
Size of inlet connection:	DN 80
Size of outlet connection:	DN 65
Pressure rating for connection:	PN 16
Bearing lubrication:	Grease
Pump housing with feet:	Yes
Support block:	N
Connect code:	F2
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-420Y V
Rated current:	5,78-5,23/3,31-2,99 A
Starting current:	720-720 %
Cos phi - power factor:	0.8
Rated speed:	1445 rpm
Efficiency:	IE3 85,3%
Motor efficiency at full load:	85.3-85.3 %
Motor efficiency at 3/4 load:	86.0-86.0 %
Motor efficiency at 1/2 load:	85.2-85.2 %
Number of poles:	4
Enclosure class (IEC 34-5):	IP55

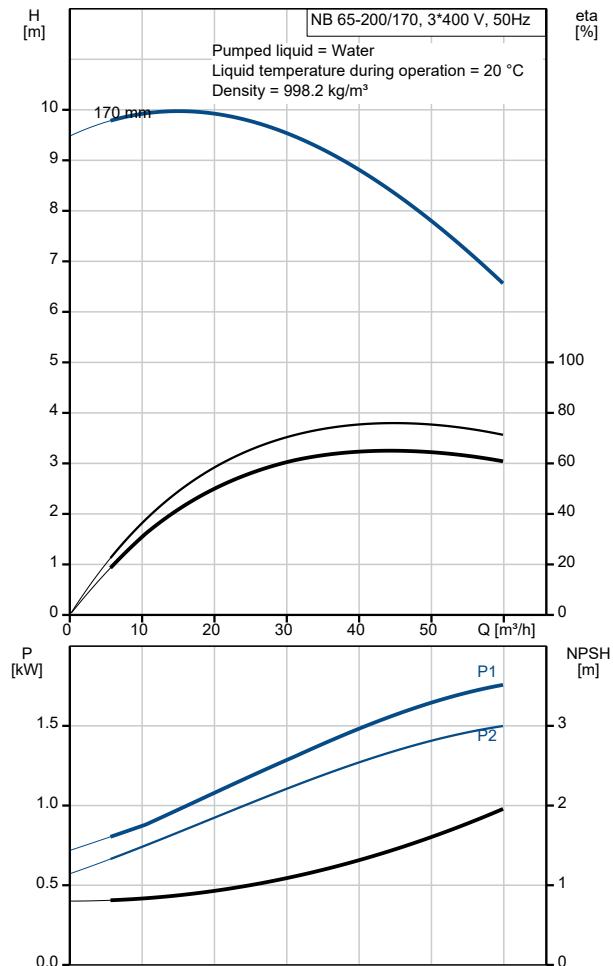

Description	Value
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	83V02206
Mount. design. acc. IEC 34-7:	IM V1
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	63 kg
Gross weight:	80 kg
Shipping volume:	0.315 m ³
Country of origin:	HU
Custom tariff no.:	84137051

98875534 NB 65-200/170 AF2ABQQE 50 Hz

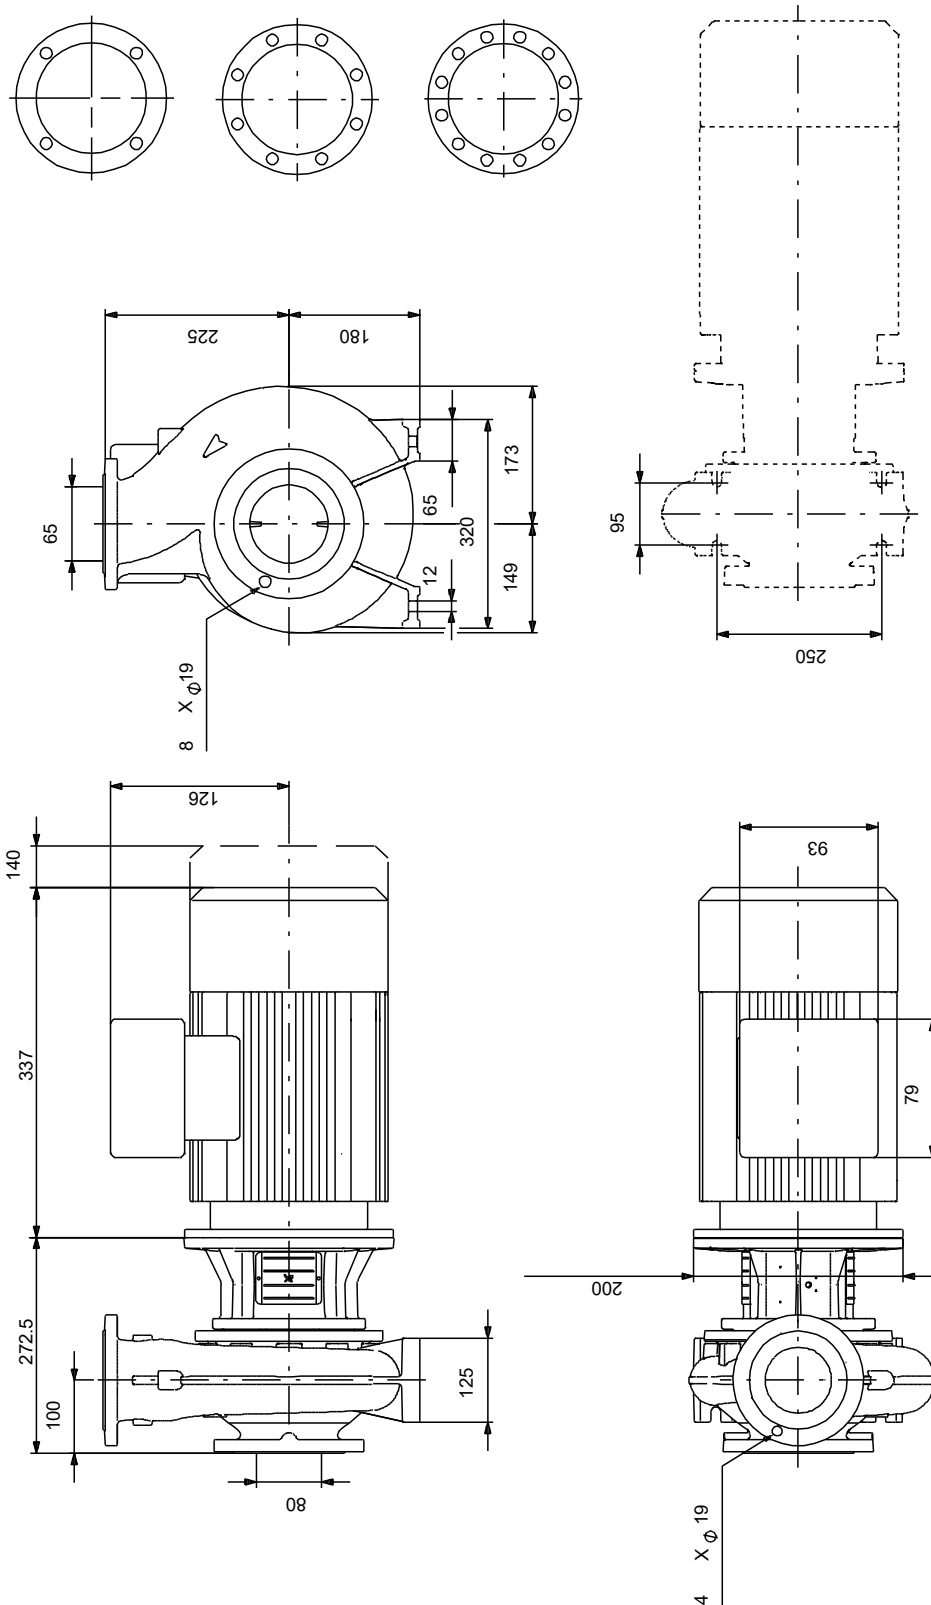

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts NB 65-200/170, Product No. 98875534
Produced After 2101 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Bulk, Nut			92514630	1	pcs
67	Nut		Thread: M14		5	
-	Bulk, o-ring			92547617	1	pcs
72.a	O-ring		Diameter: 221,84		5	
			Material type: EPDM			
			Thickness: 3,53			
-	Bulk, Plug vent			96620482	1	pcs
18	Plug				5	
-	Bulk, Shaft seal			99380916	1	pcs
105	Shaft seal				5	
-	Kit, Bushing for motor			96810018	1	pcs
8.a	Bushing				1	
9	Socket set screw		Length (mm): 8		2	
			Thread: M6			
23	Hex socket head cap screw		Designation: DIN912		6	
			Length (mm): 20			
			Thread: M8			
-	Kit, coupling guard			96591145	1	pcs
7a	Pan head screw				4	
7	Coupling guard				2	
-	Kit, cover			98990961	1	pcs
18	Plug				1	
36	Nut		Thread: M10		6	
77	Cover				1	
-	Kit, motor stool			96935181	1	pcs
1.a	Motor stool				1	
7	Coupling guard				2	
28	Hex socket head cap screw		Designation: DIN 912		4	
			Length (mm): 25			
			Thread: M10			
36	Nut		Thread: M10		6	
76a	Rivet				2	
77a	Pan head screw				4	
-	Kit, nut			96939128	1	pcs
11	Parallel key		Dimension: 6X6X35		1	
-	36 Nut				1	
66a	Spring lock washer				1	
66	Washer				1	
67	Nut		Thread: M14		1	
-	Kit, pump housing			95131724	1	pcs
-	6 Pump housing				1	
26	Staybolt		Length (mm): 35		8	
			Thread: M10			
45	Wear ring				1	
20	Pipe plug		Thread: R 3/8		2	
36	Nut		Thread: M10		8	
-	Kit, pump shaft			96847108	1	pcs
11	Parallel key		Dimension: 6X6X35		1	
23	Hex socket head cap screw		Designation: DIN912		6	
			Length (mm): 20			
			Thread: M8			
51	Pump shaft				1	
66a	Spring lock washer				1	
66	Washer				1	
67	Nut		Thread: M14		1	
+	Spare, O-ring			97757671	1	pcs
-	Spare, plug vent			98164277	1	pcs
18	Plug				1	
-	Spare, shaft seal			98434904	1	pcs

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
105	Shaft seal				1	
-	Spare, wear ring			99208818	1	pcs
45	Wear ring				1	
-	Motor				1	pcs
156	Spare, motor fan			98728949	1	
151	Spare, motor fan cover			98728862	1	
176	Spare, Terminal board			98850910	1	
49	Impeller			92515312	1	pcs