

Inventflow: Grundfos A-partner

Grundfos NK 125-200/219 EUP A2F2AE-SBQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/nk/grundfos-nk-125-200-219-eup-a2f2ae-sbqqe>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	NK 125-200/219 EUP A2F2AE-SBQQE  Note! Product picture may differ from actual product Product No.: 98973257 Non-self priming, single-stage centrifugal Flange standard: pump according to EN 1092-2. The pump is for the pumping of thin, clean or slightly contaminated liquids without abrasive or long-fibred solids. Phase: Pump and 3-phase AC motor are mounted as separate units on a common baseplate and The impeller is hydraulically as well as dynamically balanced. The pump has the following characteristics: - flange dimensions according to EN 1092-2, Pump housing: - Cast iron volute pump housing, - stainless steel shaft Impeller: and Cast iron impeller and bronze wear rings, - unbalanced mechanical shaft seal according to EN 12756. Controls: Frequency converter: NONE Pressure sensor: N Liquid: Pumped liquid: Water Liquid temperature range: -25 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 2975 rpm Rated flow: 536.5 m³/h Pump with motor: Y Rated head: 49.46 m Actual impeller diameter: 219 mm Nominal impeller diameter: 200 Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B Bearing design: Standard Materials: Pump housing: Cast iron EN-GJL-250 ASTM class 35 Wear ring: Brass Impeller: Cast iron EN-GJL-200

Qty.	Description
	ASTM class 30 Shaft: Stainless steel EN 1.4301 AISI 304 Internal pump house coating: CED Installation: Maximum ambient temperature: 55 °C Maximum operating pressure: 16 bar Pipe connection standard: EN 1092-2 Type of inlet connection: DIN Type of outlet connection: DIN Size of inlet connection: DN 150 Size of outlet connection: DN 125 Pressure rating for connection: PN 16 Coupling type: Flexible w/spacer Base frame design: EN/ISO Grouting: Y Electrical data: Motor type: SIEMENS IE Efficiency class: IE3 Rated power - P2: 90 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-420D/660-725Y V Rated current: 160-148/92,0-85,0 A Starting current: 720-720 % Cos phi - power factor: 0.90 Rated speed: 2975 rpm Efficiency: IE3 95,0% Motor efficiency at full load: 95.0-95.0 % Motor efficiency at 3/4 load: 95.1-95.1 % Motor efficiency at 1/2 load: 94.6-94.6 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 98943378 Others: Minimum efficiency index, MEI ≥: 0.70 Net weight: 1050 kg Gross weight: 1090 kg Shipping volume: 2.13 m³ Country of origin: HU Custom tariff no.: 84137059

98973257 NK 125-200/219 EUP A2F2AE-SBQQE 50 Hz

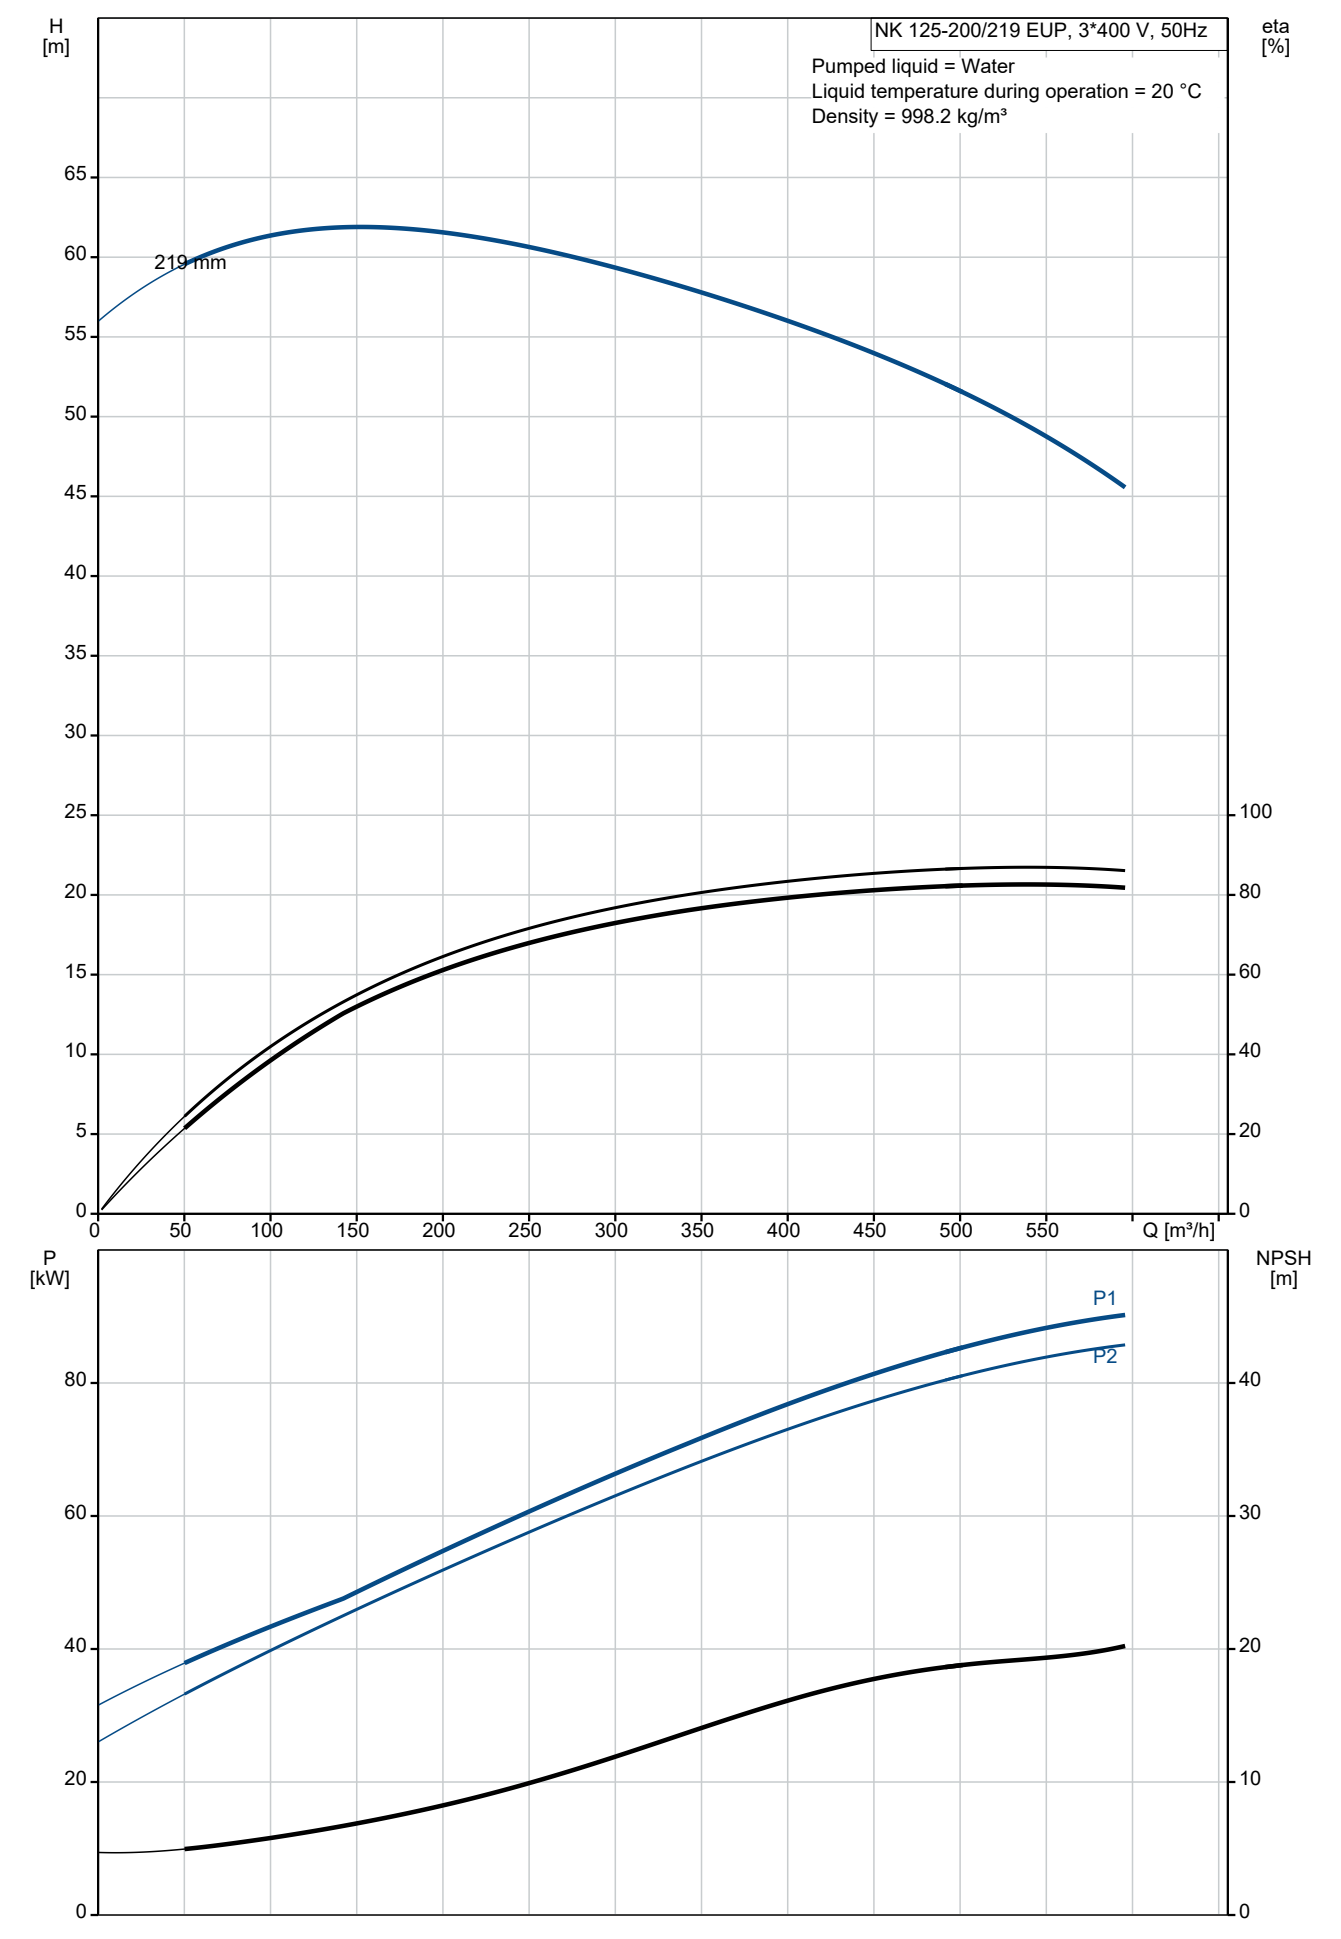


Description	Value
General information:	
Product name:	NK 125-200/219 EUP A2F2AE-SBQQE
Product No:	98973257
EAN number:	5712604501627
Technical:	
Pump speed on which pump data are based:	2975 rpm
Rated flow:	536.5 m³/h
Pump with motor:	Y
Rated head:	49.46 m
Actual impeller diameter:	219 mm
Nominal impeller diameter:	200
Shaft diameter:	32 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A2
Bearing design:	Standard
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Wear ring:	Brass
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Internal pump house coating:	CED
Material code:	A
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	16 bar
Pipe connection standard:	EN 1092-2
Type of inlet connection:	DIN
Type of outlet connection:	DIN
Size of inlet connection:	DN 150
Size of outlet connection:	DN 125
Pressure rating for connection:	PN 16
Coupling type:	Flexible w/spacer
Base frame design:	EN/ISO
Grouting:	Y
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	90 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725V V
Rated current:	160-148/92,0-85,0 A
Starting current:	720-720 %
Cos phi - power factor:	0.90
Rated speed:	2975 rpm
Efficiency:	IE3 95,0%
Motor efficiency at full load:	95.0-95.0 %
Motor efficiency at 3/4 load:	95.1-95.1 %
Motor efficiency at 1/2 load:	94.6-94.6 %

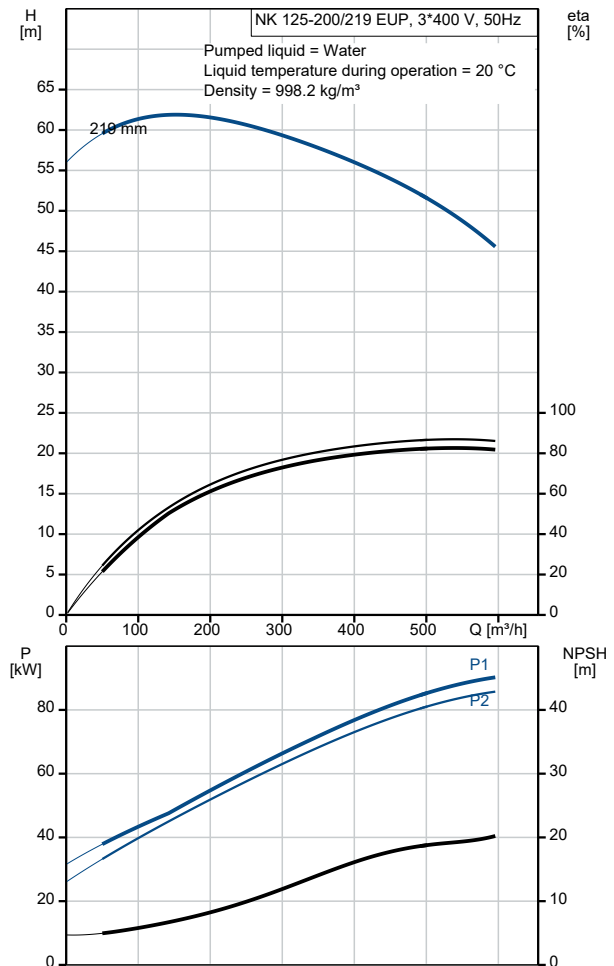

Description	Value
Number of poles:	2
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	98943378
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	1050 kg
Gross weight:	1090 kg
Shipping volume:	2.13 m ³
Country of origin:	HU
Custom tariff no.:	84137059

98973257 NK 125-200/219 EUP A2F2AE-SBQQE 50 Hz

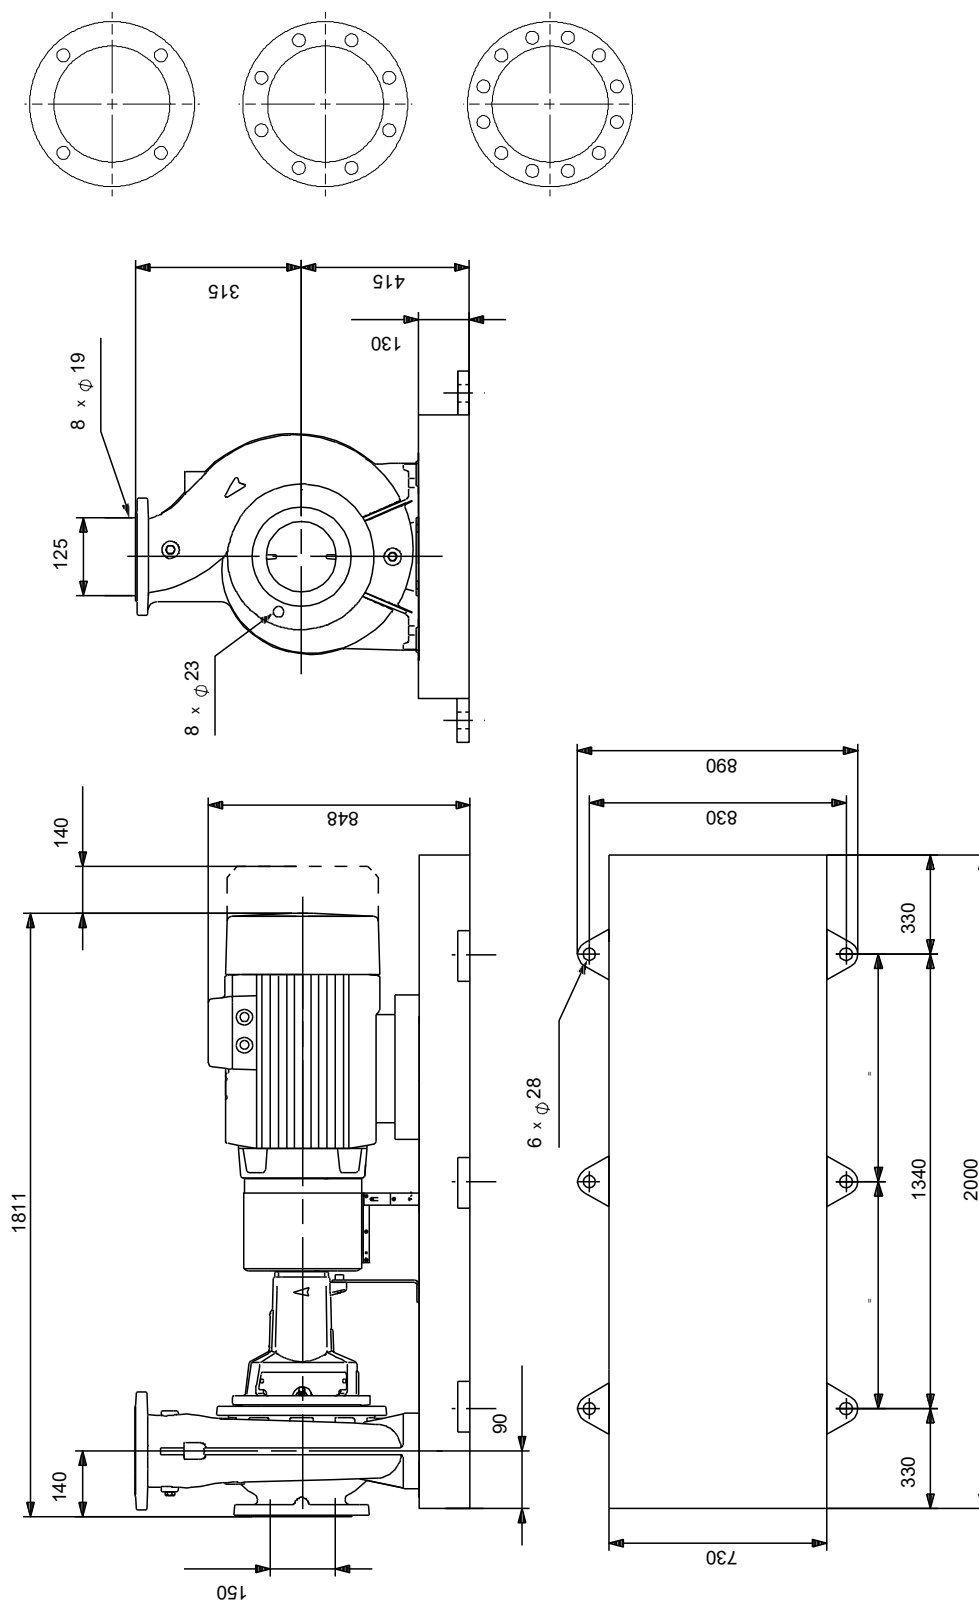

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts NK 125-200/219 EUP, Product No. 98973257
Produced After 1610 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Kit, bearing			96579599	1	pcs
111	Ball bearing			96607904	1	
53	Ball bearing			96607904	1	
53.a	O-ring		Diameter: 89,5		1	
			Material type: EPDM			
			Thickness: 3			
109	O-ring		Diameter: 89,5		1	
			Material type: EPDM			
			Thickness: 3			
156a	Bearing cover				2	
159f	Retaining ring				2	
159a	V-ring				2	
-	Kit, bearing bracket			95131794	1	pcs
7.k	Hex socket head cap screw		Length (mm): 10		4	
			Thread: M6			
36.a	Nut		Thread: M10		6	
76a	Rivet				2	
86	Bearing bracket				1	
124d	Shaft guard				1	
124d	Shaft guard				1	
124.d	Pan head screw				4	
-	Kit, coupling			96579806	1	pcs
- 8	Coupling cpl.				1	
89s	Spacer ring				1	
89r	Spacer sleeve				1	
89o	Coupling part spacer side				1	
89.p	Coupling female				1	
89.d	Hex socket head cap screw				7	
89.c	Socket set screw				1	
89.a	Socket set screw		Length (mm): 10		1	
			Thread: M8			
89	Rubber blocks for coupling				7	
11.a	Parallel key				1	
-	Kit, coupling guard			98078802	1	pcs
7b	Hex socket head cap screw		Length (mm): 10		4	
			Thread: M6			
7b	Retainer for coupling guard				1	
- 7	Coupling guard cpl.				1	
7e	Hex socket head cap screw				3	
7c	Spacer f/coupling guard				1	
7	Guard				1	
94	Lock nut		Thread: M6		2	
-	Kit, cover			95131788	1	pcs
18	Plug				1	
36	Nut		Thread: M10		8	
77	Cover f/mech. seal				1	
-	Kit, foot for bearing bracket			96909488	1	pcs
	Nut		Thread: M12		2	
66	Washer				2	
90.e	Hex head screw		Length (mm): 25		1	
			Thread: M12			
90.d	Hex head bolt		Length (mm): 100		2	
			Thread: M12			
90.d	Hex head screw		Length (mm): 60		2	
			Thread: M12			
90.d	Hex head screw		Length (mm): 35MM		2	
			Thread: M12			
90.d	Hex head screw		Length (mm): 30		2	
			Thread: M12			

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
90.c	Foot				1	
-	Kit, foot for coupling guard			96848500	1	pcs
7h	Hex head screw	Length (mm): 16			2	
		Thread: M8				
- 7.d	Foot cpl.				1	
7l	Support f/coupling guard foot				1	
7h	Hex socket head cap screw				2	
7d	Foot for coupling guard				1	
66	Washer				2	
66	Washer				2	
-	Kit, nut			96939130	1	pcs
11	Parallel key				1	
- 36	Nut				1	
66a	Spring lock washer				1	
66	Washer				1	
67	Nut	Thread: M18			1	
-	Kit, pump housing			98776465	1	pcs
6	Pump housing				1	
20	Plug				2	
36	Nut	Thread: M10			8	
-	Kit, rubber blocks f. coupling			96480040	1	pcs
89	Rubber blocks for coupling				7	
-	Kit, shaft			96039655	1	pcs
11.a	Parallel key				1	
11	Parallel key				1	
51	Shaft				1	
66a	Spring lock washer				1	
66	Washer				1	
67	Nut	Thread: M18			1	
-	Kit, shaft cover			96809957	1	pcs
124d	Shaft guard				1	
124d	Shaft guard				1	
124.d	Pan head screw				4	
-	Spare, wear ring			96797628	1	pcs
45	Wear ring				1	
-	V-ring			96871238	1	pcs
159a	V-ring				2	
-	Motor				1	pcs
155a	Bearing cover			96764522	1	
155d	Bearing cover			96764535	1	
158	Corrugated spring			96764566	1	
151	Fan cover			96775944	1	
192	Foot			96767036	1	
191	Foot			96767032	1	
151	Kit, fan cover			99018554	1	
	Kit, lubrication nipple			98360052	1	
176	Kit, terminal board			98062239	1	
164a	Kit, terminal box			98062264	1	
156	Spare, motor fan			96766463	1	
156	Spare, motor fan			96766463	1	
176	Terminal board cpl.			96766011	1	
164	Terminal box cover			96766008	1	
164a	Terminal box cpl.			96748507	1	
159	V-ring			96767663	1	
153	Ball bearing	Designation: 6317 C3		97501049	1	
7k	Hex socket head cap screw	Length (mm): 10		97506946	4	pcs
		Thread: M6				
28	Hex head screw	Length (mm): 25		99522923	1	pcs
		Thread: M12				
36	Nut	Thread: M10		96620484	8	pcs
49	Impeller			99010594	1	pcs
54	Ball bearing			98638919	2	pcs
67	Nut	Thread: M18		92526535	1	pcs
72.a	O-ring	Diameter: 221,84		92547617	1	pcs

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
			Material type: EPDM			
			Thickness: 3,53			
72.a	O-ring		Diameter: 221,84	97511825	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72.a	O-ring		Diameter: 221,84	97757671	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
77a	Pan head screw			99266550	4	pcs
105b	Spacer			96591277	1	pcs
109	O-ring		Diameter: 89,5	97511809	2	pcs
			Material type: EPDM			
			Thickness: 3			
156a	Bearing cover			97506937	2	pcs