

## Inventflow: Grundfos A-partner

### Grundfos NB 125-315/336 ASF2ABQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/nb/grundfos-nb-125-315-336-asf2abqqe>

#### Contact

[info@inventflow.nl](mailto:info@inventflow.nl)

+31 (0) 546 45 80 72


#### Datasheet




| Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <p><b>NB 125-315/336 ASF2ABQQE</b></p>  <p>Product No.: <a href="#">98975779</a></p> <p>Non-self priming, single-stage centrifugal<br/> Flange standard: pump according to EN 1092-2.</p> <p>The pump is for the pumping of thin, clean or slightly contaminated liquids without abrasive or long-fibred solids.</p> <p>The pump is directly coupled with an<br/> Phase: IEC-flanged 3-phase AC motor.</p> <p>The impeller is hydraulically as well as dynamically balanced.</p> <p>The pump has the following characteristics:</p> <ul style="list-style-type: none"> <li>- flange dimensions according to EN 1092-2,</li> </ul> <p>Pump housing: - Cast iron volute pump housing,</p> <ul style="list-style-type: none"> <li>- stainless steel shaft</li> </ul> <p>Impeller: and Cast iron impeller and bronze wear rings,</p> <ul style="list-style-type: none"> <li>- unbalanced mechanical shaft seal according to EN 12756.</li> </ul> <p>Controls:</p> <p>Frequency converter: NONE</p> <p>Pressure sensor: N</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: -25 .. 120 °C</p> <p>Selected liquid temperature: 20 °C</p> <p>Density: 998.2 kg/m<sup>3</sup></p> <p>Technical:</p> <p>Pump speed on which pump data are based: 1480 rpm</p> <p>Rated flow: 262.2 m<sup>3</sup>/h</p> <p>Rated head: 35.94 m</p> <p>Actual impeller diameter: 336 mm</p> <p>Nominal impeller diameter: 315</p> <p>Shaft seal arrangement: Single</p> <p>Code for shaft seal: BQQE</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Bearing design: Standard</p> <p>Materials:</p> <p>Pump housing: Cast iron<br/> EN-GJL-250<br/> ASTM class 35</p> <p>Wear ring: Brass</p> <p>Impeller: Cast iron</p> |

| Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | EN-GJL-200<br>ASTM class 30<br>Shaft: Stainless steel<br>EN 1.4301<br>AISI 304<br>Internal pump house coating: CED<br><br>Installation:<br>Maximum ambient temperature: 55 °C<br>Maximum operating pressure: 16 bar<br>Pipe connection standard: EN 1092-2<br>Size of inlet connection: DN 150<br>Size of outlet connection: DN 125<br>Pressure rating for connection: PN 16<br>Bearing lubrication: Grease<br>Pump housing with feet: Yes<br>Support block: Y<br><br>Electrical data:<br>Motor type: SIEMENS<br>IE Efficiency class: IE3<br>Rated power - P2: 37 kW<br>Mains frequency: 50 Hz<br>Rated voltage: 3 x 380-420D/660-725Y V<br>Rated current: 69,0-64,0/39,5-37,0 A<br>Starting current: 640-640 %<br>Cos phi - power factor: 0.9<br>Rated speed: 1480 rpm<br>Efficiency: IE3 93,9%<br>Motor efficiency at full load: 93.9-93.9 %<br>Motor efficiency at 3/4 load: 94.5-94.5 %<br>Motor efficiency at 1/2 load: 94.4-94.4 %<br>Number of poles: 4<br>Enclosure class (IEC 34-5): IP55<br>Insulation class (IEC 85): F<br>Motor No: 99032202<br><br>Others:<br>Minimum efficiency index, MEI ≥: 0.68<br>Net weight: 497 kg<br>Gross weight: 529 kg<br>Shipping volume: 0.951 m³<br>Country of origin: HU<br>Custom tariff no.: 84137051 |

98975779 NB 125-315/336 ASF2ABQQE 50 Hz

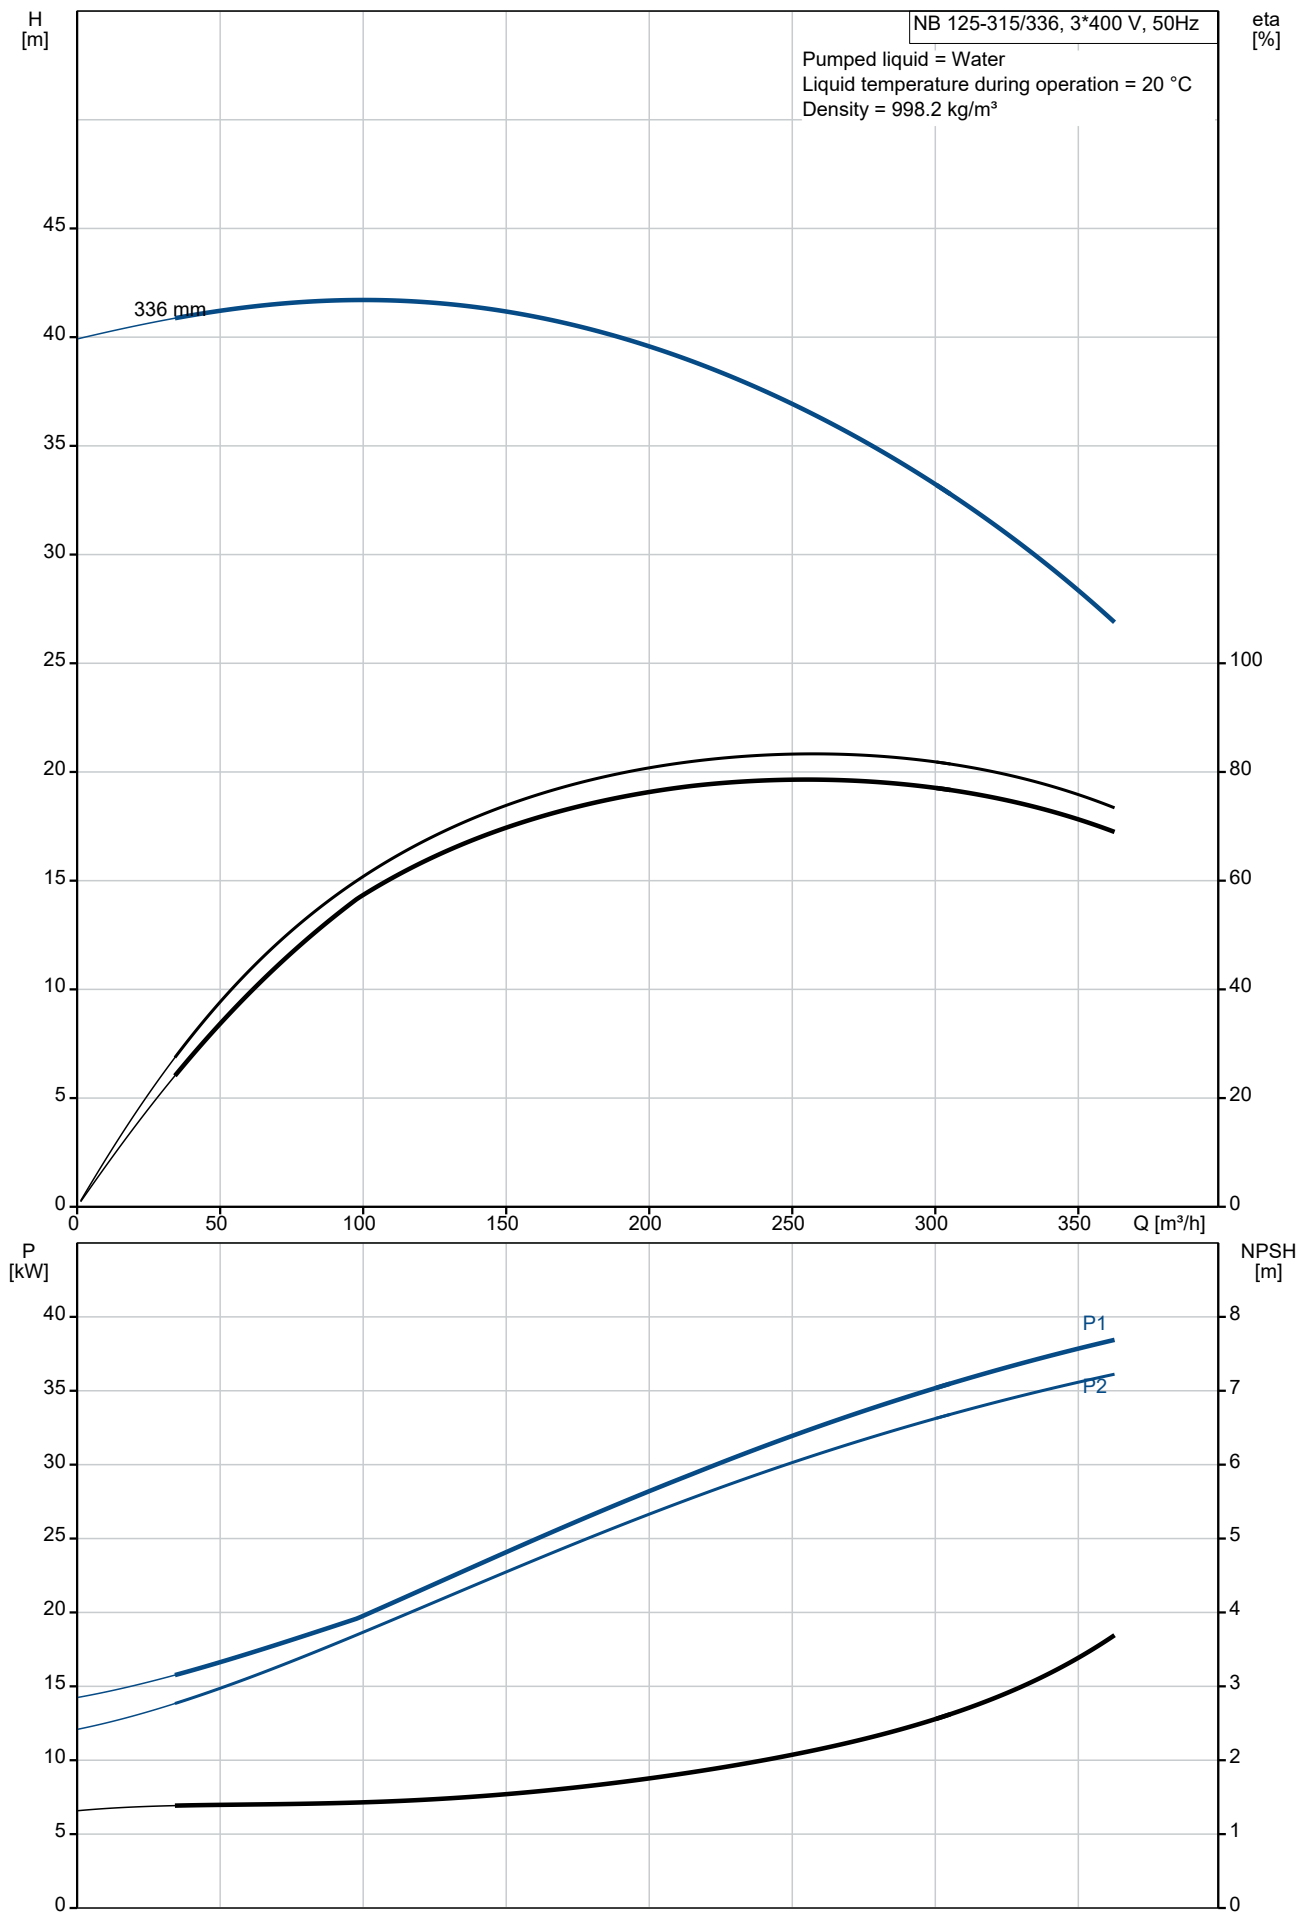


| Description                              | Value                       |
|------------------------------------------|-----------------------------|
| <b>General information:</b>              |                             |
| Product name:                            | NB 125-315/336<br>ASF2ABQQE |
| Product No:                              | 98975779                    |
| EAN number:                              | 5712604549360               |
| <b>Technical:</b>                        |                             |
| Pump speed on which pump data are based: | 1480 rpm                    |
| Rated flow:                              | 262.2 m³/h                  |
| Rated head:                              | 35.94 m                     |
| Actual impeller diameter:                | 336 mm                      |
| Nominal impeller diameter:               | 315                         |
| Shaft seal arrangement:                  | Single                      |
| Shaft diameter:                          | 42 mm                       |
| Code for shaft seal:                     | BQQE                        |
| Curve tolerance:                         | ISO9906:2012 3B             |
| Pump version:                            | AS                          |
| Bearing design:                          | Standard                    |
| <b>Materials:</b>                        |                             |
| Pump housing:                            | Cast iron                   |
| Pump housing:                            | EN-GJL-250                  |
| Pump housing:                            | ASTM class 35               |
| Wear ring:                               | Brass                       |
| Impeller:                                | Cast iron                   |
| Impeller:                                | EN-GJL-200                  |
| Impeller:                                | ASTM class 30               |
| Shaft:                                   | Stainless steel             |
| Shaft:                                   | EN 1.4301                   |
| Shaft:                                   | AISI 304                    |
| Internal pump house coating:             | CED                         |
| Material code:                           | A                           |
| Code for rubber:                         | E                           |
| <b>Installation:</b>                     |                             |
| Maximum ambient temperature:             | 55 °C                       |
| Maximum operating pressure:              | 16 bar                      |
| Pipe connection standard:                | EN 1092-2                   |
| Size of inlet connection:                | DN 150                      |
| Size of outlet connection:               | DN 125                      |
| Pressure rating for connection:          | PN 16                       |
| Bearing lubrication:                     | Grease                      |
| Pump housing with feet:                  | Yes                         |
| Support block:                           | Y                           |
| Connect code:                            | F2                          |
| <b>Liquid:</b>                           |                             |
| Pumped liquid:                           | Water                       |
| Liquid temperature range:                | -25 .. 120 °C               |
| Selected liquid temperature:             | 20 °C                       |
| Density:                                 | 998.2 kg/m³                 |
| <b>Electrical data:</b>                  |                             |
| Motor type:                              | SIEMENS                     |
| IE Efficiency class:                     | IE3                         |
| Rated power - P2:                        | 37 kW                       |
| Mains frequency:                         | 50 Hz                       |
| Rated voltage:                           | 3 x 380-420D/660-725Y V     |
| Rated current:                           | 69,0-64,0/39,5-37,0 A       |
| Starting current:                        | 640-640 %                   |
| Cos phi - power factor:                  | 0.9                         |
| Rated speed:                             | 1480 rpm                    |
| Efficiency:                              | IE3 93,9%                   |
| Motor efficiency at full load:           | 93.9-93.9 %                 |
| Motor efficiency at 3/4 load:            | 94.5-94.5 %                 |
| Motor efficiency at 1/2 load:            | 94.4-94.4 %                 |
| Number of poles:                         | 4                           |
| Enclosure class (IEC 34-5):              | IP55                        |

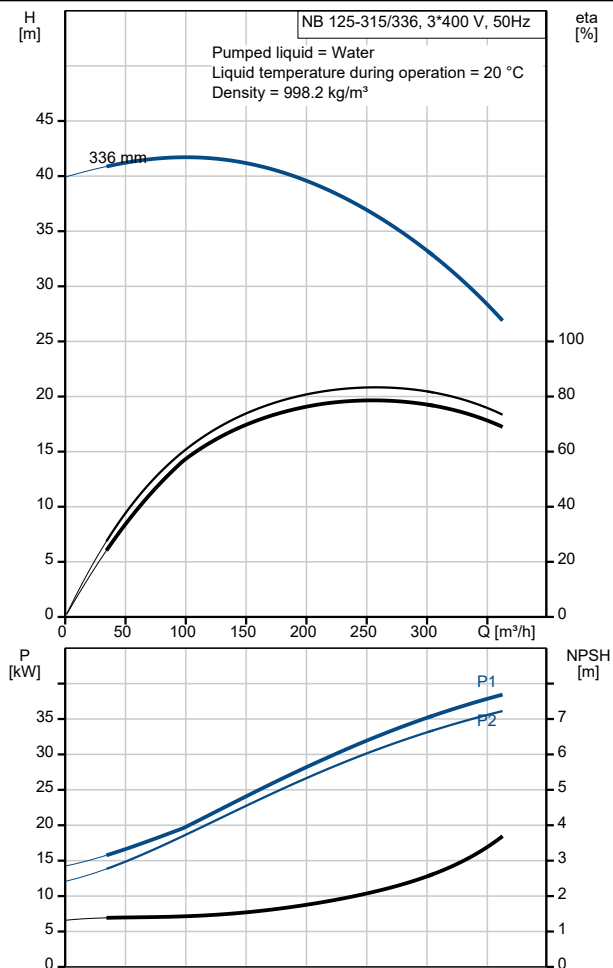

| Description                      | Value                |
|----------------------------------|----------------------|
| Insulation class (IEC 85):       | F                    |
| Motor protec:                    | PTC                  |
| Motor No:                        | 99032202             |
| Mount. design. acc. IEC 34-7:    | IM B35               |
| <b>Controls:</b>                 |                      |
| Frequency converter:             | NONE                 |
| Pressure sensor:                 | N                    |
| <b>Others:</b>                   |                      |
| Minimum efficiency index, MEI ≥: | 0.68                 |
| Net weight:                      | 497 kg               |
| Gross weight:                    | 529 kg               |
| Shipping volume:                 | 0.951 m <sup>3</sup> |
| Country of origin:               | HU                   |
| Custom tariff no.:               | 84137051             |

# 98975779 NB 125-315/336 ASF2ABQQE 50 Hz

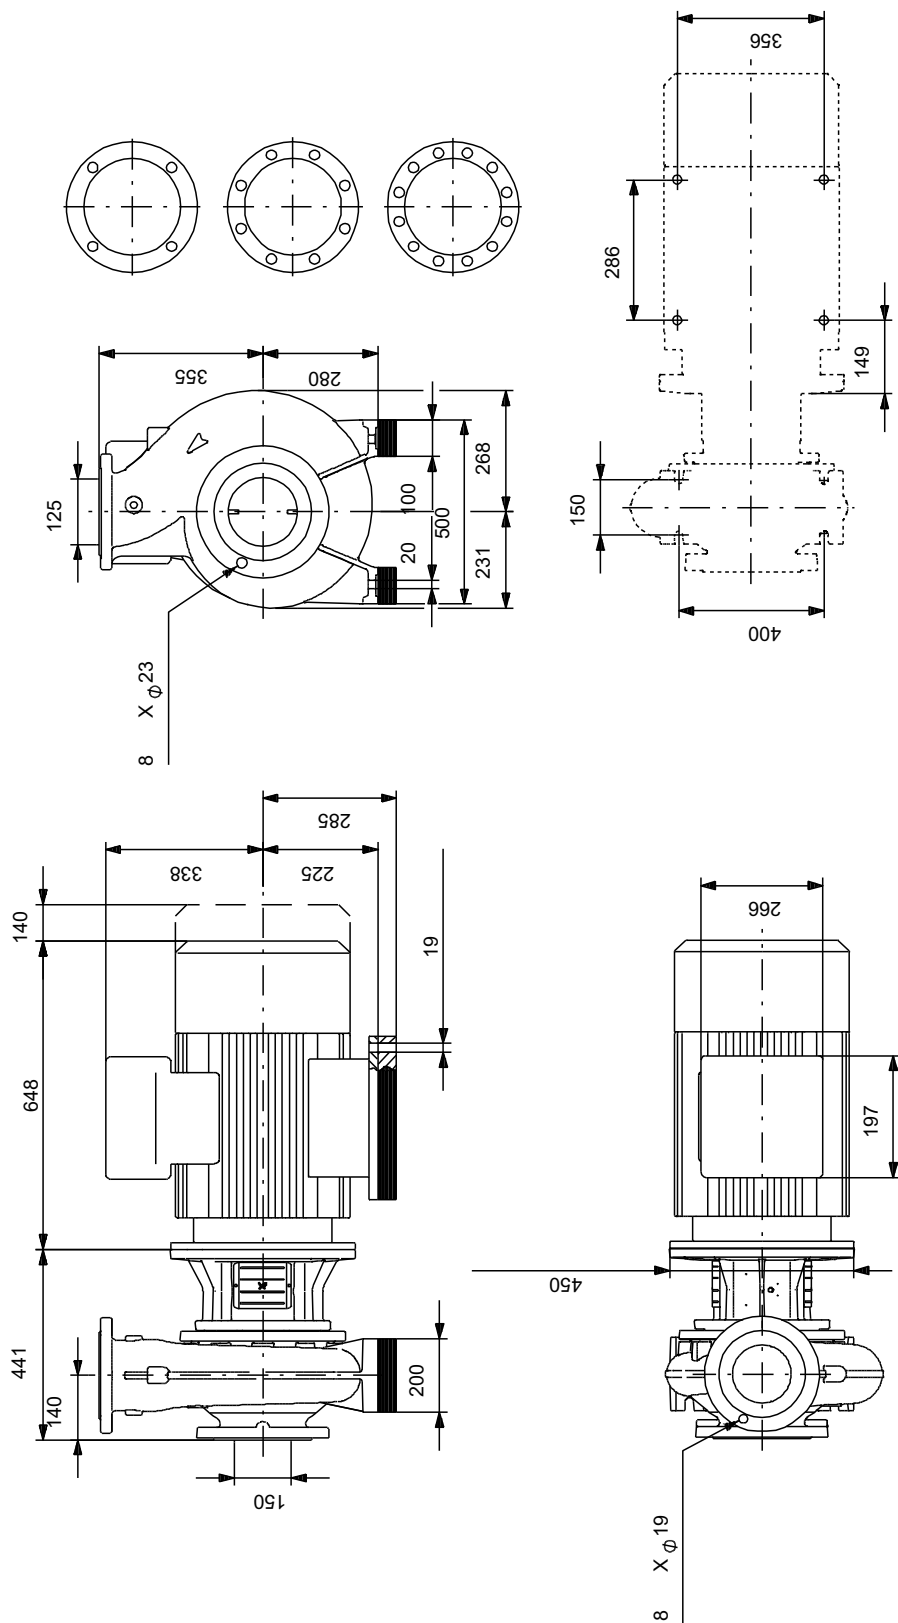

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

**Spare parts NB 125-315/336, Product No. 98975779**  
**Produced After 2101 (production year and week number)**

| Pos  | Omschrijving        | Opmerking tekst | Classificatie Gegevens | Onderdeelnr. | Aantal | Eenheid |
|------|---------------------|-----------------|------------------------|--------------|--------|---------|
| -    | Bulk, Nut           |                 |                        | 92514632     | 1      | pcs     |
| 67   | Nut                 |                 | Thread: M24            |              | 5      |         |
| -    | Bulk, o-ring        |                 |                        | 92547632     | 1      | pcs     |
| 72a  | O-ring              |                 | Diameter: 329,79       |              | 5      |         |
|      |                     |                 | Material type: EPDM    |              |        |         |
|      |                     |                 | Thickness: 3,53        |              |        |         |
| -    | Bulk, Plug vent     |                 |                        | 96620482     | 1      | pcs     |
| 18   | Plug                |                 |                        |              | 5      |         |
| -    | Bulk, Shaft seal    |                 |                        | 92514334     | 1      | pcs     |
| 105  | Shaft seal          |                 |                        |              | 5      |         |
| -    | Kit, coupling guard |                 |                        | 96809946     | 1      | pcs     |
| 7a   | Pan head screw      |                 |                        |              | 4      |         |
| 7    | Coupling guard      |                 |                        |              | 2      |         |
| -    | Kit, cover          |                 |                        | 98990973     | 1      | pcs     |
| 18   | Plug                |                 |                        |              | 1      |         |
| 36   | Nut                 |                 | Thread: M12            |              | 10     |         |
| 77   | Cover               |                 |                        |              | 1      |         |
| -    | Kit, motor stool    |                 |                        | 96935195     | 1      | pcs     |
| 1.a  | Motor stool         |                 |                        |              | 1      |         |
| 7    | Coupling guard      |                 |                        |              | 2      |         |
| 28   | Hex head screw      |                 |                        |              | 8      |         |
| 36   | Hex nut             |                 | Thread: M16            |              | 12     |         |
| 36   | Nut                 |                 | Thread: M12            |              | 10     |         |
| 76a  | Rivet               |                 |                        |              | 2      |         |
| 77a  | Pan head screw      |                 |                        |              | 4      |         |
| -    | Kit, nut            |                 |                        | 96939132     | 1      | pcs     |
| 11   | Key                 |                 |                        |              | 1      |         |
| -    | 36                  | Nut             |                        |              | 1      |         |
| 66a  | Spring lock washer  |                 |                        |              | 1      |         |
| 66   | Washer              |                 |                        |              | 1      |         |
| 67   | Nut                 |                 | Thread: M24            |              | 1      |         |
| -    | Kit, pump housing   |                 |                        | 96930837     | 1      | pcs     |
| 6    | Pump housing        |                 |                        |              | 1      |         |
| 20   | Plug                |                 |                        |              | 2      |         |
| 36   | Nut                 |                 | Thread: M12            |              | 14     |         |
| -    | Kit, stub shaft     |                 |                        | 99248523     | 1      | pcs     |
| 11   | Key                 |                 |                        |              | 1      |         |
| 51   | Stub shaft          |                 |                        |              | 1      |         |
| 66a  | Spring lock washer  |                 |                        |              | 1      |         |
| 66   | Washer              |                 |                        |              | 1      |         |
| 67   | Nut                 |                 | Thread: M25            |              | 1      |         |
| 89.a | Socket set screw    |                 | Length (mm): 10        |              | 3      |         |
|      |                     |                 | Thread: M8             |              |        |         |
| +    | Spare, O-ring       |                 |                        | 97757675     | 1      | pcs     |
| -    | Spare, plug vent    |                 |                        | 98164277     | 1      | pcs     |
| 18   | Plug                |                 |                        |              | 1      |         |
| -    | Spare, shaft seal   |                 |                        | 98434909     | 1      | pcs     |
| 105  | Shaft seal          |                 |                        |              | 1      |         |
| -    | Spare, wear ring    |                 |                        | 99208792     | 1      | pcs     |
| 45   | Wear ring           |                 |                        |              | 1      |         |
|      | Motor               |                 |                        |              | 1      | pcs     |
| 49   | Impeller            |                 |                        | 98517862     | 1      | pcs     |