

Inventflow: Grundfos A-partner

Grundfos CRNE 15-5 A-P-A-E-HQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/crne/grundfos-crne-15-5-a-p-a-e-hqqe>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	CRNE 15-5 A-P-A-E-HQQE  Product No.: 99071586 Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via PJE (Victaulic®) couplings. The pump is fitted with a 3-phase, fan-cooled, permanent-magnet, synchronous motor. The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2. The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The Grundfos Eye indicator on the operating panel provides visual indication of pump status: • "Power on": Motor is running (rotating green indicator lights) or not running (permanently green indicator lights) • "Warning": Motor is still running (rotating yellow indicator lights) or has stopped (permanently yellow indicator lights) • "Alarm": Motor has stopped (flashing red indicator lights). Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required: • two dedicated digital inputs • three analog inputs, 0(4)-20 mA, 0-5 V, 0-10 V, 0.5 - 3.5 V • 5 V voltage supply to potentiometer and sensor • one analog output, 0-10 V, 0(4)-20 mA • two configurable digital inputs or open-collector outputs • two Pt100/Pt1000 inputs • LiqTec, dry-running protection sensor input • Grundfos Digital Sensor input and output • 24 V voltage supply for sensors • two signal-relay outputs (potential-free contacts) • GENIbus connection • interface for Grundfos CIM fieldbus module. Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 3525 rpm Rated flow: 20.5 m³/h Rated head: 81.1 m Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: HQQE Approvals on nameplate: CE,EAC,UKCA,WRAS,ACS Curve tolerance: ISO9906:2012 3B Materials: Base: Stainless steel EN 1.4408

Qty.	Description
	Impeller: AISI 316 Stainless steel EN 1.4401 Bearing: AISI 316 SIC Installation: Maximum ambient temperature: 50 °C Maximum operating pressure: 25 bar Max pressure at stated temp: 25 bar / 120 °C 25 bar / -20 °C Type of connection: PJE Size of inlet connection: DN 50 Size of outlet connection: DN 50 Pressure rating for connection: PN 50 Flange size for motor: FF265 Electrical data: Motor standard: IEC Motor type: 132SF IE Efficiency class: IE5 Rated power - P2: 7.5 kW Power (P2) required by pump: 7.5 kW Mains frequency: 50 / 60 Hz Rated voltage: 3 x 380-500 V Rated current: 14.1-11.2 A Cos phi - power factor: 0.93-0.89 Rated speed: 360-4000 rpm Efficiency: 92.5% Motor efficiency at full load: 92.5 % Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 98971052 Controls: Frequency converter: Built-in Pressure sensor: N Others: Minimum efficiency index, MEI ≥: 0.70 DOE Pump Energy Index CL: 0.00 DOE Pump Energy Index VL: 0.00 Net weight: 88 kg Gross weight: 116 kg Shipping volume: 0.37 m³ Danish VVS No.: 386014005 Country of origin: HU Custom tariff no.: 84137075

99071586 CRNE 15-5 A-P-A-E-HQQE

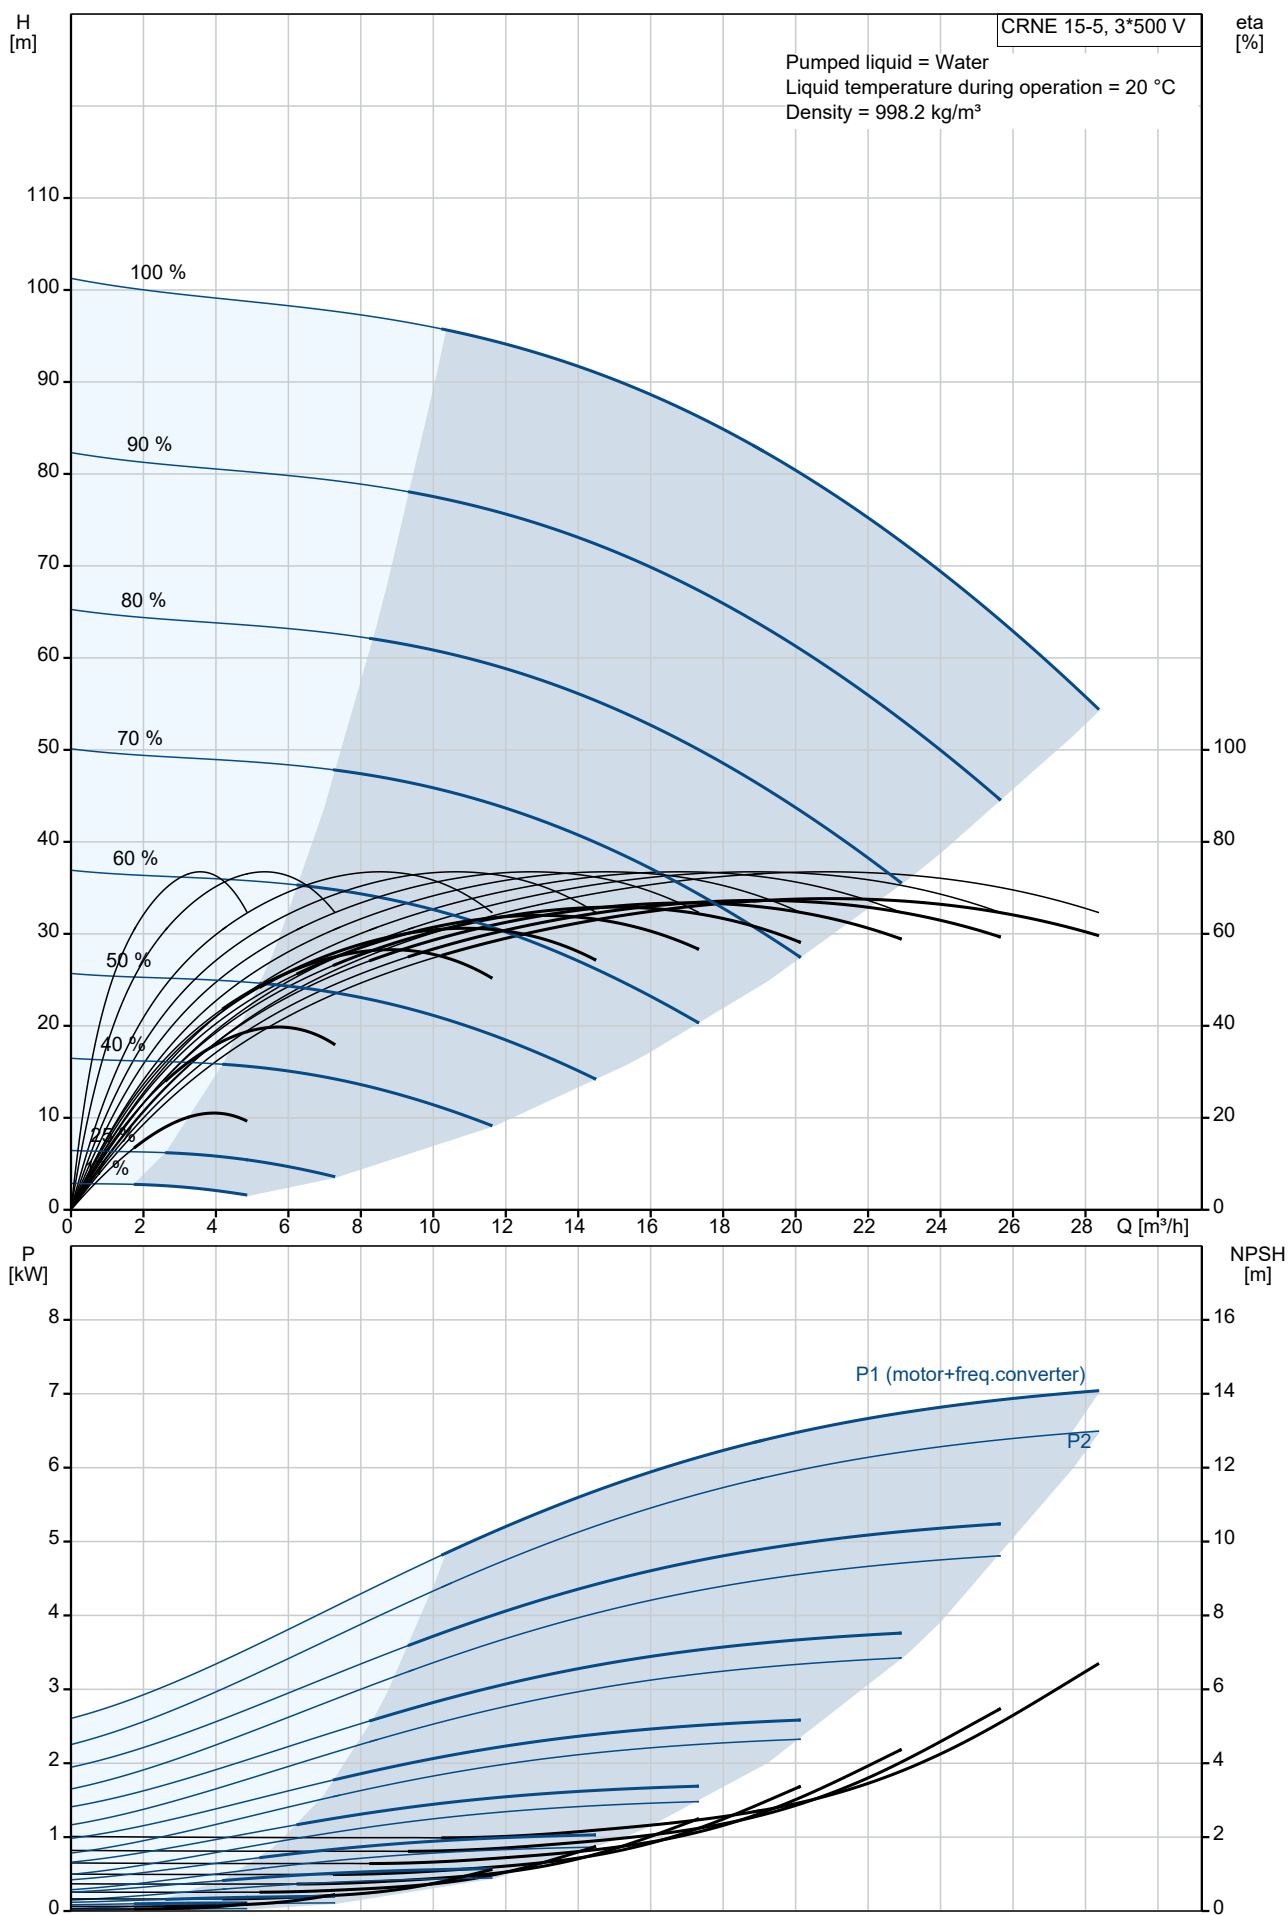


Description	Value		
General information:			
Product name:	CRNE 15-5 A-P-A-E-HQQE		
Product No:	99071586		
EAN number:	5712606194322		
Technical:			
Pump speed on which pump data are based:	3525 rpm		
Rated flow:	20.5 m³/h		
Rated head:	81.1 m		
Maximum head:	102 m		
Stages:	5		
Impellers:	5		
Number of reduced-diameter impellers:	0		
Low NPSH:	N		
Pump orientation:	Vertical		
Shaft seal arrangement:	Single		
Code for shaft seal:	HQQE		
Approvals on nameplate:	CE,EAC,UKCA,WRAS,A CS		
Curve tolerance:	ISO9906:2012 3B		
Pump version:	A		
Model:	A		
Materials:			
Base:	Stainless steel		
Base:	EN 1.4408		
Base:	AISI 316		
Impeller:	Stainless steel		
Impeller:	EN 1.4401		
Impeller:	AISI 316		
Material code:	A		
Code for rubber:	E		
Bearing:	SIC		
Installation:			
Maximum ambient temperature:	50 °C		
Maximum operating pressure:	25 bar		
Max pressure at stated temp:	25 bar / 120 °C		
Max pressure at stated temp:	25 bar / -20 °C		
Type of connection:	PJE		
Size of inlet connection:	DN 50		
Size of outlet connection:	DN 50		
Pressure rating for connection:	PN 50		
Flange size for motor:	FF265		
Connect code:	P		
Liquid:			
Pumped liquid:	Water		
Liquid temperature range:	-20 .. 120 °C		
Selected liquid temperature:	20 °C		
Density:	998.2 kg/m³		
Electrical data:			
Motor standard:	IEC		
Motor type:	132SF		
IE Efficiency class:	IE5		
Rated power - P2:	7.5 kW		
Power (P2) required by pump:	7.5 kW		
Mains frequency:	50 / 60 Hz		
Rated voltage:	3 x 380-500 V		
Rated current:	14.1-11.2 A		
Cos phi - power factor:	0.93-0.89		
Rated speed:	360-4000 rpm		
Efficiency:	92.5%		
Motor efficiency at full load:	92.5 %		
Enclosure class (IEC 34-5):	IP55		
Insulation class (IEC 85):	F		
Motor protec:	ELEC		

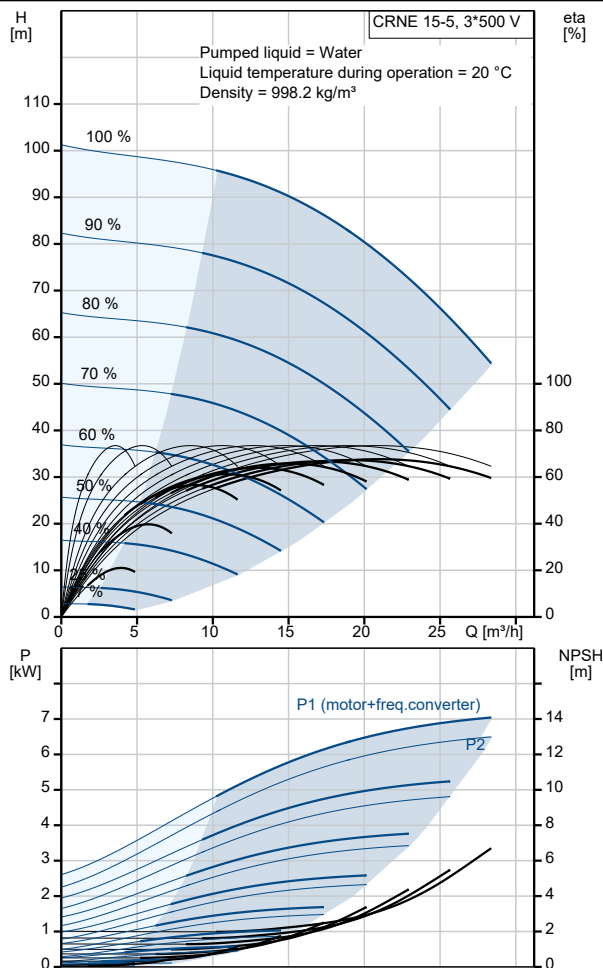


Description	Value
Motor No:	98971052
Controls:	
Control panel:	Standard
Function Module:	FM300 - Advanced
Frequency converter:	Built-in
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.70
DOE Pump Energy Index CL:	0.00
DOE Pump Energy Index VL:	0.00
Net weight:	88 kg
Gross weight:	116 kg
Shipping volume:	0.37 m ³
Config. file no:	99059089
Danish VVS No.:	386014005
Country of origin:	HU
Custom tariff no.:	84137075

99071586 CRNE 15-5 A-P-A-E-HQQE

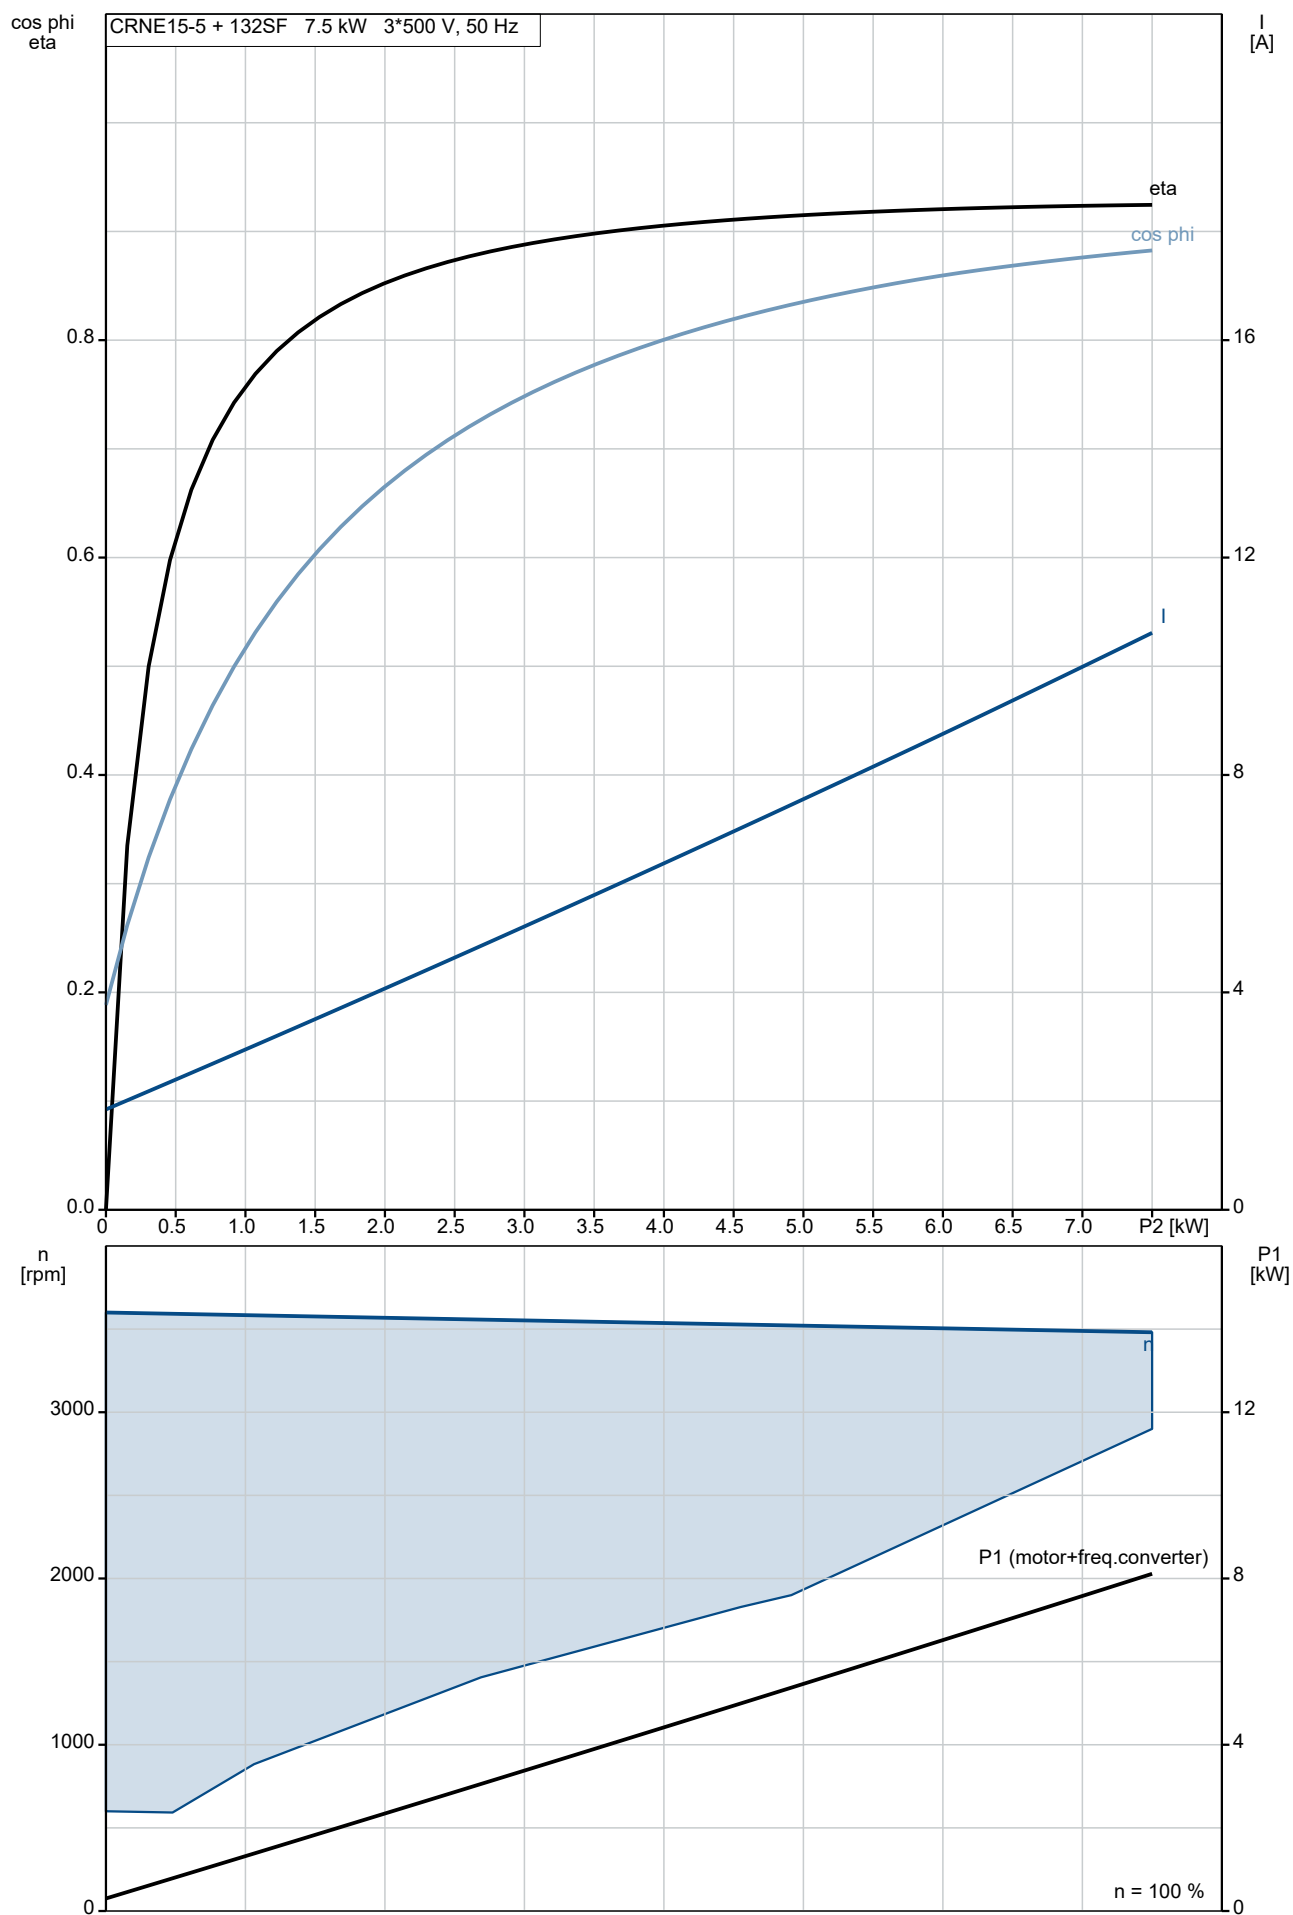

99071586 CRNE 15-5 A-P-A-E-HQQE

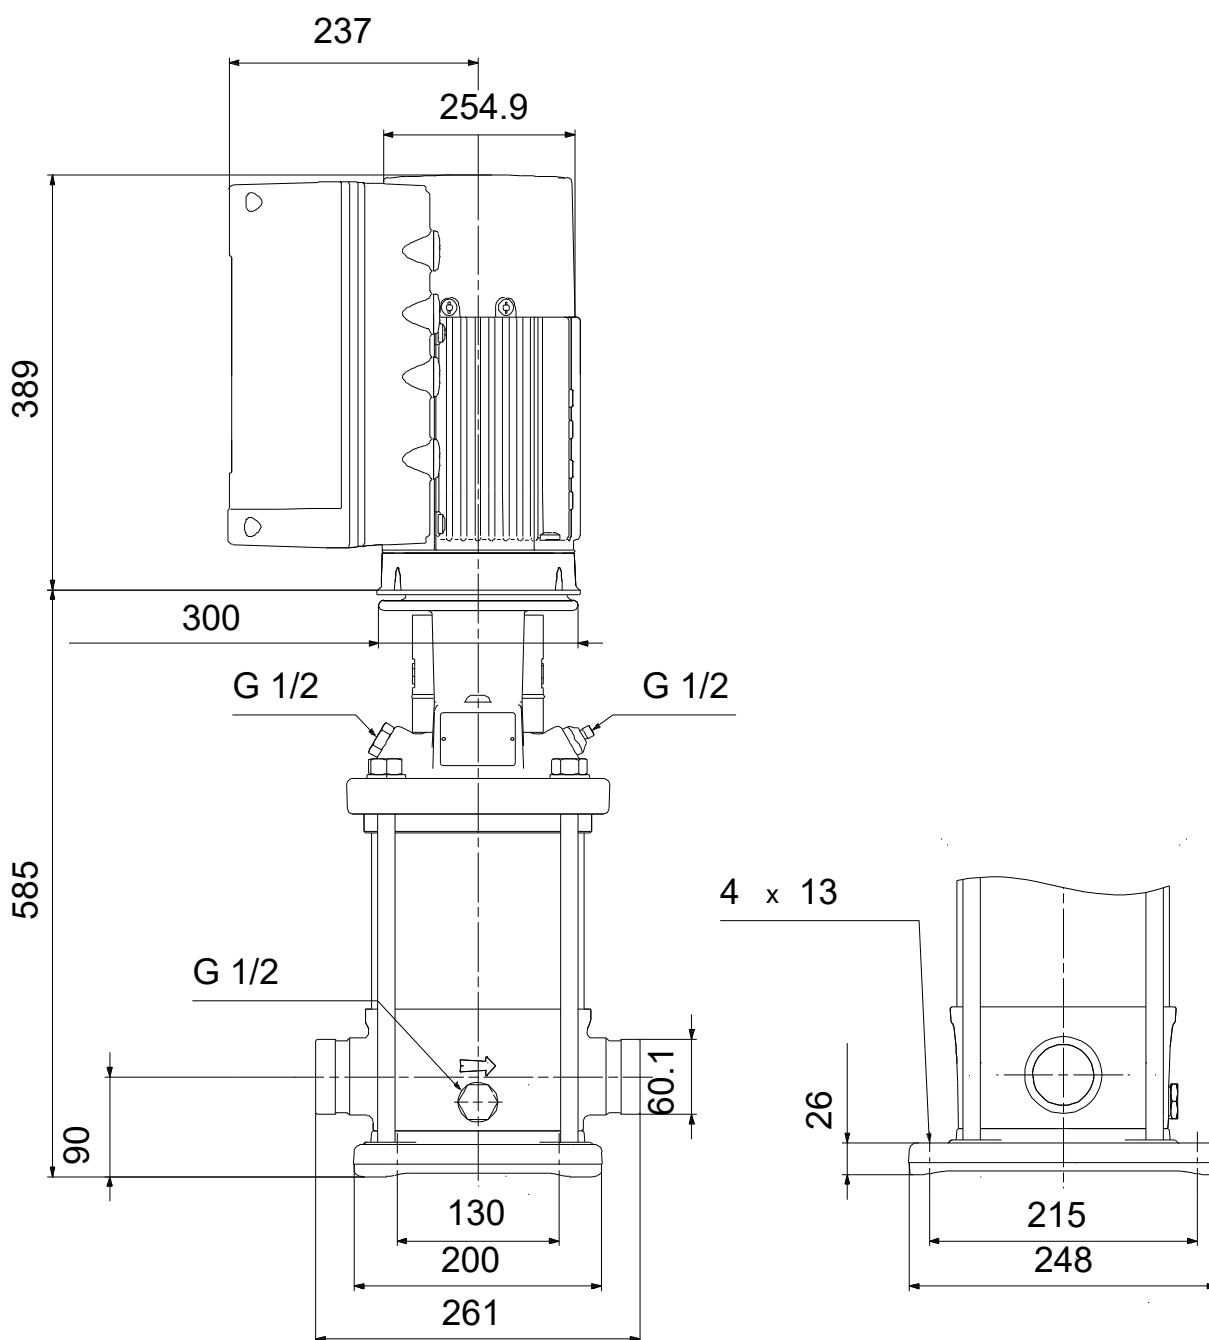

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts CRNE 15-5, Product No. 99071586
Produced After 1633 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Kit, chamber stack			96491763	1	pcs
- 80	Chamber stack				1	
- 3	Top intermediate chamber				1	
	Guide vane					
	Cover plate					
3	Intermediate chamber					
- 4a	Intermediate chamber cpl.				1	
	Sand Lifter					
	Guide cup					
	Bearing plate					
	Guide vane					
3	Intermediate chamber					
45	Neck ring cpl.					
47	Bearing bush					
65	Retainer					
- 4	Intermediate chamber cpl.				3	
3	Intermediate chamber					
45	Neck ring cpl.					
65	Retainer					
26a	Strap cpl.				2	
26.c	Washer		Designation: DIN 125A		2	
			Thickness: 1,6			
26.b	Hex head screw				2	
44b	Inlet part				1	
- 44a	Inlet part cpl.				1	
45	Neck ring cpl.					
65	Retainer					
47a	Bearing ring				1	
- 49	Impeller cpl.				5	
49c	Wear ring					
49	Impeller					
- 51	Shaft, spline, cpl.				1	
	Bar					
62	Stop ring					
64d	Spacing bush				1	
64c	Spacer				1	
64a	Spacing pipe		Internal diameter: 17,5		1	
			Length (mm): 17			
64	Spacing pipe		Length (mm): 43.6		3	
66	Wedge lock washer				1	
67	Lock nut		Thread: M8		1	
69	Spacing bush				1	
-	Kit, coupling			96511351	1	pcs
	Adjusting fork				1	
- 8	Coupling				1	
9	Hex socket head cap screw		Designation: DIN 912		4	
			Length (mm): 25			
			Thread: M10			
10a	Coupling half				1	
10	Shaft pin		Diameter: 5		1	
			Length (mm): 26			
-	Kit, coupling guard			96509613	1	pcs
7.a	Combi Slot Torx screw				4	
7	Coupling guard				2	
-	Kit, gaskets			96509609	1	pcs
	Gasket				2	
24	O-ring				2	
37	O-ring				2	
38	O-ring				1	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
38	O-ring				1	
38	O-ring				2	
60	Spring				4	
415	Gasket		Internal diameter: 44		2	
			Outer diameter: 60			
			Thickness: 2			
441b	Gasket		Internal diameter: 49		2	
			Outer diameter: 92			
			Thickness: 2			
-	Kit, plug			96511312	1	pcs
- 18	Air vent screw				1	
	Spindle				1	
	Plug				1	
25a	Drain plug				1	
25	Plug				1	
38	O-ring				1	
38	O-ring				1	
38	O-ring				2	
38	O-ring		Diameter: 5,3		1	
			Material type: FKM			
			Thickness: 2,4			
38	O-ring		Diameter: 16,3		1	
			Material type: FKM			
			Thickness: 2,4			
38	O-ring		Diameter: 16,3		2	
			Material type: FKM			
			Thickness: 2,4			
-	Kit, shaft seal HQQE			96511844	1	pcs
105	Shaft seal		Material type: HQQE		1	
-	Kit, wear parts			96511824	1	pcs
- 4a	Intermediate chamber cpl.				1	
	Sand Lifter				1	
	Guide cup				1	
	Bearing plate				1	
	Guide vane				10	
3	Intermediate chamber				1	
45	Neck ring cpl.				1	
47	Bearing bush				1	
65	Retainer				1	
26.c	Washer		Designation: DIN 125A		2	
			Thickness: 1,6			
26.b	Hex head screw				2	
45	Neck ring cpl.				5	
47a	Bearing ring				1	
49c	Wear ring				6	
62	Retaining ring				1	
64d	Spacing bush				1	
64c	Spacer				1	
64b	Spacing bush		Length (mm): 5.00		1	
64a	Spacing pipe		Internal diameter: 17,5		1	
			Length (mm): 17			
65	Retainer				5	
66	Wedge lock washer				1	
67	Lock nut		Thread: M8		1	
-	Motor				1	pcs
-	Kit, Blanking plug			99052476	1	
252b	Blind plug				1	
252b	Plug cpl.				5	
-	Kit, cable gland			98736115	1	
293	Cable glands set				1	
-	Kit, connector plugs			98403113	1	
266	Connector plug 10-pole				1	
266	Connector plug 2-pole				1	
266	Connector plug 8-pole				1	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
266	Connector plug 8-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
-	Kit, control box			98878613	1	
251d	Pan head thread forming screw				4	
251b	Control box				1	
251a	Control box cpl.				1	
252b	Blind plug				1	
252b	Plug cpl.				5	
266	Connector plug 10-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 8-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
266	Connector plug 3-pole				1	
268a	Base				2	
268	Pan head screw				2	
273b	Battery				1	
273a	Cross recess Pan head screw				4	
273	Funct. Module cpl.				1	
275a	Pin				1	
277b	Spring				4	
277a	Cross recess Pan head screw				1	
277	Cover				1	
286	Spacer				1	
287	Cover				1	
288b	Retaining ring				8	
288a	Pan head thread forming screw				8	
288	Wire clamp				4	
289a	Pan head thread forming screw				1	
289	Wire clamp				1	
290	Control panel, cpl.				1	
301	Jumper				1	
-	Kit, Control box upper			98869869	1	
251d	Pan head thread forming screw				4	
251b	Control box				1	
-	Kit, Control panel			98939973	1	
290	Control panel, cpl.				1	
-	Kit, cover			98330622	1	
287	Cover				1	
-	Kit, end shield (NDE)			98869885	1	
150b	O-ring				1	
156c	Seal ring				1	
156.a	End shield NDE				1	
157	O-ring		Diameter: 62 Material type: NBR Thickness: 3		1	
158	Waved washer				1	
206	Pan head thread forming screw				4	
206	Hex socket head cap screw				4	
207b	Nut				4	
-	Kit, fan			98869879	1	
152	Pan head thread forming screw				4	
156c	Seal ring				1	
156	Fan				1	
-	Kit, fan cover			99957566	1	
151	Fan cover				1	
152	Pan head thread forming screw				4	
-	Kit, flange (DE)			98869905	1	
	Glue				0	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
150b	O-ring				1	
155a	Bearing cover				1	
156c	Seal ring				1	
156b	Flange				1	
185	Hex socket head cap screw				4	
201c	Drain plug				4	
208b	Nut				4	
208a	Gasket				3	
208	Hex socket head cap screw		Designation: DIN912		3	
			Length (mm): 40			
			Thread: M5			
-	Kit, Funct. module			98334777	1	
273a	Cross recess Pan head screw				5	
273	Funct. Module cpl.				1	
275a	Pin				1	
286	Spacer				1	
-	Kit, Isolation cover			98859523	1	
277b	Spring				4	
277a	Cross recess Pan head screw				1	
277	Cover				1	
-	Kit, Lower part cpl.			98859573	1	
178	Pan head thread forming screw				4	
251a	Control box cpl.				1	
275a	Pin				1	
277a	Cross recess Pan head screw				1	
277	Cover				1	
-	Kit, motor			99010792	1	
	Hex socket head cap screw				2	
	Glue				0	
	Terminal				6	
66a	Washer				2	
111	Ball bearing		Designation: 6206.2Z.C3.SYN		1	
118a	Hex socket head cap screw				4	
150b	O-ring				2	
150	Stator w/housing				1	
151	Fan cover				1	
152	Pan head thread forming screw				4	
153	Angular-contact bearing				1	
155a	Bearing cover				1	
156d	Gasket				1	
156c	Seal ring				1	
156c	Seal ring				1	
156b	Flange				1	
156.a	End shield NDE				1	
156	Fan				1	
157	O-ring		Diameter: 62		1	
			Material type: NBR			
			Thickness: 3			
158	Waved washer				2	
172	Shaft w/rotor				1	
185	Hex socket head cap screw				4	
186	Drain plug				4	
187	Retaining ring				1	
203	Terminal plug				1	
208b	Nut				4	
208b	Nut				4	
208a	Gasket				3	
208	Hex socket head cap screw		Designation: DIN912		3	
			Length (mm): 40			
			Thread: M5			
289a	Pan head thread forming screw				2	
-	Kit, plug			99028677	1	
152	Pan head thread forming screw				2	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
203	Terminal plug				1	
205	Gasket				1	
-	Kit, screws			99028725	1	
268a	Base				2	
268	Pan head screw				2	
288b	Retaining ring				8	
288a	Pan head thread forming screw				8	
288	Wire clamp				4	
289a	Pan head thread forming screw				1	
289	Wire clamp				1	
-	Kit, staybolts			98881543	1	
181	Pan head staybolt				4	
	Lifting device			99140040	2	
111	Ball bearing	Designation: 6206.2Z.C3.SYN		99078033	1	
111	Ball bearing	Designation: 6206.2Z.C3.SYN		97501070	1	
152	Pan head thread forming screw			99834207	4	
152	Pan head thread forming screw			99814578	4	
153	Angular-contact bearing			98412045	1	
153	Angular-contact bearing			98576644	1	
186	Drain plug			99980519	4	
251d	Pan head thread forming screw			98995460	4	
266	Connector plug 3-pole			99421265	1	
1a	Pump head			98914854	1	pcs
1	Flange			99104283	1	pcs
2	Pump cover			98481138	1	pcs
+ 3	Top intermediate chamber			98734577	1	pcs
+ 4a	Intermediate chamber cpl.			96538853	1	pcs
+ 4a	Intermediate chamber cpl.			98371117	1	pcs
- 4	Intermediate chamber cpl.			96538840	3	pcs
3	Intermediate chamber			98371143	1	
65	Retainer			96547341	1	
+ 4	Intermediate chamber cpl.			98371115	3	pcs
6	Base			98654159	1	pcs
10	Shaft pin	Diameter: 5		96536473	1	pcs
		Length (mm): 26				
10	Shaft pin	Diameter: 5		96587588	1	pcs
		Length (mm): 26				
+ 18	Air vent screw			96547461	1	pcs
+ 18	Air vent screw			95061351	1	pcs
25	Plug			96536013	1	pcs
26a	Strap cpl.			98967460	2	pcs
26.c	Washer	Designation: DIN 125A		99262704	2	pcs
		Thickness: 1,6				
26.c	Washer	Designation: DIN 125A		99886930	2	pcs
		Thickness: 1,6				
26	Staybolt			98982878	4	pcs
32	Washer	Designation: DIN 125 A2		99944260	4	pcs
		Internal diameter: 17				
		Outer diameter: 30				
		Thickness: 3				
36	Nut	Thread: M16		99944257	4	pcs
37a	O-ring			96538857	1	pcs
38	O-ring			99198791	1	pcs
38	O-ring			99198815	2	pcs
38	O-ring			99412727	2	pcs
44b	Inlet part			98814593	1	pcs
+ 44a	Inlet part cpl.			98818922	1	pcs
47a	Bearing ring			96538795	1	pcs
- 49	Impeller cpl.			98394449	5	pcs
49c	Wear ring			96547340	1	
+ 51	Shaft, spline, cpl.			98368632	1	pcs
55	Outer sleeve			98812637	1	pcs

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
56	Base plate			98481136	1	pcs
60	Spring			96538963	4	pcs
64d	Spacing bush			96538947	1	pcs
64c	Spacer			97980241	1	pcs
64a	Spacing pipe		Internal diameter: 17,5	98417487	1	pcs
			Length (mm): 17			
64	Spacing pipe		Length (mm): 43.6	96535107	3	pcs
66	Wedge lock washer			96536157	1	pcs
66	Wedge lock washer			92575609	1	pcs
67	Lock nut		Thread: M8	98277008	1	pcs
69	Spacing bush			96538949	1	pcs
76a	Rivet			96620489	1	pcs
105	Shaft seal		Material type: HQQE	96538914	1	pcs