

Inventflow: Grundfos A-partner

Grundfos CRE 95-2-2 A-F-A-E-HQQE

Find the pump here:

<https://inventflow.nl/en/pompenfilter/cre/grundfos-cre-95-2-2-a-f-a-e-hqqe>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description
1	CRE 95-2-2 A-F-A-E-HQQE  Note! Product picture may differ from actual product Product No.: 99264359 Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. The Grundfos cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via DIN flanges. The pump is fitted with a 3-phase, fan-cooled asynchronous motor. The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The operating panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box holds terminals for these connections: • pump start/stop input (potential-free contact) • remote setpoint setting via analog signal, 0-10 V, 0(4)-20 mA • 10 V voltage supply for setpoint potentiometer, I_{max} = 5 mA • three analog sensor inputs, 0-10 V, 0(4)-20 mA • 24 V voltage supply for sensor, I_{max} = 40 mA • one analog output • three digital inputs • two Pt100 inputs • two potential-free fault signal relays with changeover contact, reporting "Fault", "Operation" or "Ready" • RS-485 GENIbus connection • interface for Grundfos CIM fieldbus module. Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Pump speed on which pump data are based: 3558 rpm Rated flow: 114 m³/h Rated head: 47.8 m Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: HQQE Approvals: CE,EAC,UKCA,ACS,WRAS Curve tolerance: ISO9906:2012 3B Materials: Base: Ductile cast iron EN 1563 EN-GJS-500-7 Impeller: Stainless steel EN 1.4301 Bearing: WC/WC Support bearing: Graflon Material certified according to: European standards

Qty.	Description
	Installation: Maximum ambient temperature: 40 °C Maximum operating pressure: 16 bar Max pressure at stated temp: 16 bar / 120 °C Type of connection: DIN Size of inlet connection: DN 100 Size of outlet connection: DN 100 Pressure rating for connection: PN 16 Flange size for motor: FF300 Electrical data: Motor standard: IEC Motor type: 160LB IE Efficiency class: IE3 Rated power - P2: 18.5 kW Power (P2) required by pump: 18.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-480 V Rated current: 37.0-31.0 A Cos phi - power factor: 0.91-0.88 Rated speed: 480-3540 rpm Efficiency: IE3 92,4% Motor efficiency at full load: 92.4 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 85901026 Controls: Frequency converter: Built-in Pressure sensor: N Others: DOE Pump Energy Index CL: 0.00 DOE Pump Energy Index VL: 0.00 Net weight: 251 kg Gross weight: 314 kg Shipping volume: 1.14 m³ Thrust handling device: N Country of origin: DK Custom tariff no.: 84137075

99264359 CRE 95-2-2 A-F-A-E-HQQE 50 Hz

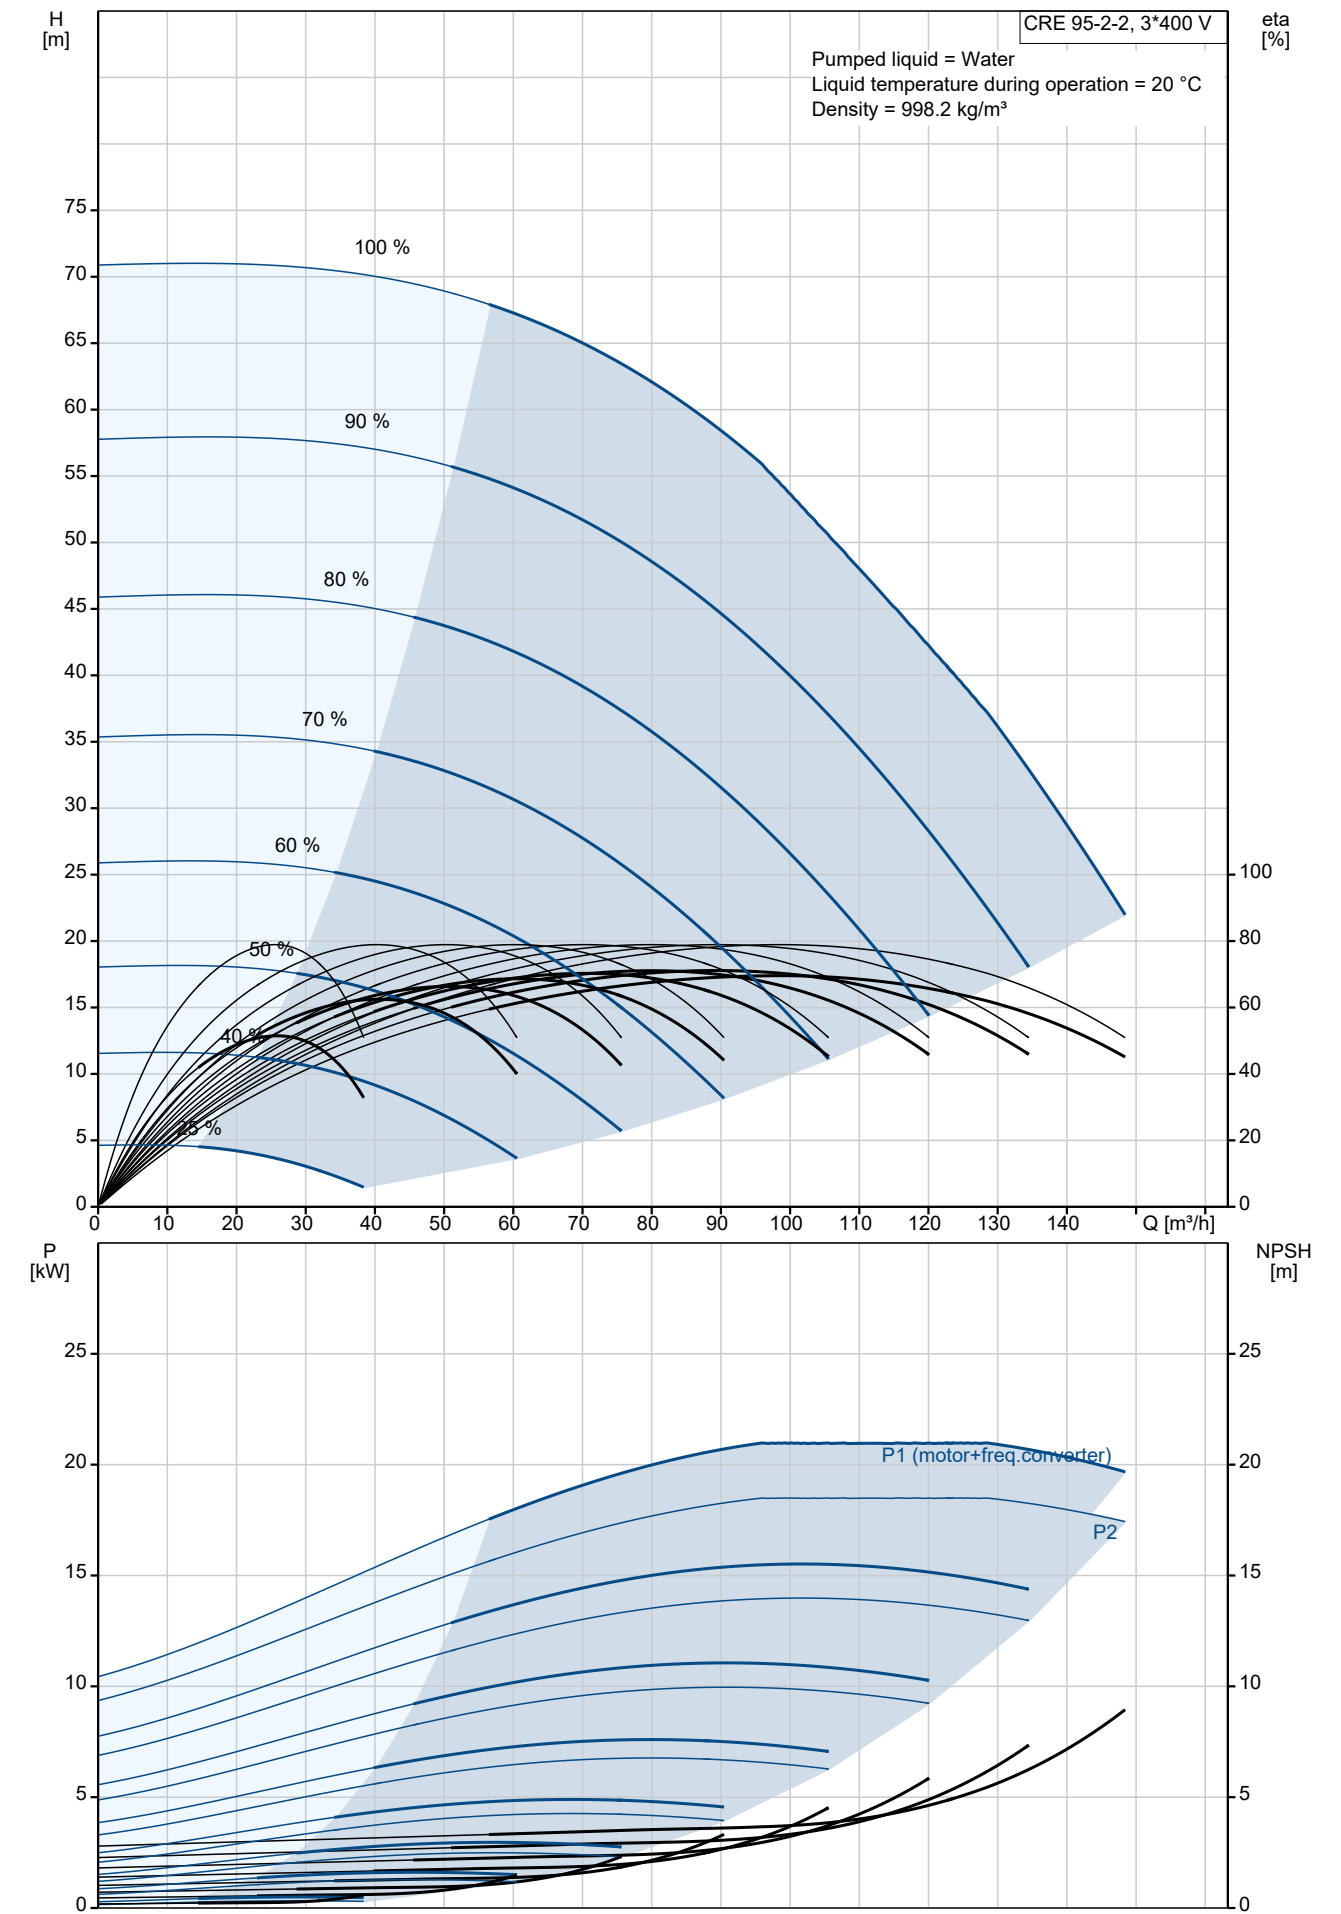


Description	Value		
General information:			
Product name:	CRE 95-2-2 A-F-A-E-HQQE		
Product No:	99264359		
EAN number:	5713826223069		
Technical:			
Pump speed on which pump data are based:	3558 rpm		
Rated flow:	114 m³/h		
Rated head:	47.8 m		
Maximum head:	71.4 m		
Stages:	2		
Impellers:	2		
Number of reduced-diameter impellers:	2		
Low NPSH:	N		
Pump orientation:	Vertical		
Shaft seal arrangement:	Single		
Code for shaft seal:	HQQE		
Approvals:	CE,EAC,UKCA,ACS,WRAS		
Curve tolerance:	ISO9906:2012 3B		
Pump version:	A		
Model:	A		
Materials:			
Base:	Ductile cast iron		
Base:	EN 1563 EN-GJS-500-7		
Impeller:	Stainless steel		
Impeller:	EN 1.4301		
Material code:	A		
Code for rubber:	E		
Bearing:	WC/WC		
Support bearing:	Graflon		
Material certified according to:	European standards		
Installation:			
Maximum ambient temperature:	40 °C		
Maximum operating pressure:	16 bar		
Max pressure at stated temp:	16 bar / 120 °C		
Type of connection:	DIN		
Size of inlet connection:	DN 100		
Size of outlet connection:	DN 100		
Pressure rating for connection:	PN 16		
Flange size for motor:	FF300		
Connect code:	F		
Liquid:			
Pumped liquid:	Water		
Liquid temperature range:	-20 .. 120 °C		
Selected liquid temperature:	20 °C		
Density:	998.2 kg/m³		
Electrical data:			
Motor standard:	IEC		
Motor type:	160LB		
IE Efficiency class:	IE3		
Rated power - P2:	18.5 kW		
Power (P2) required by pump:	18.5 kW		
Mains frequency:	50 Hz		
Rated voltage:	3 x 380-480 V		
Rated current:	37.0-31.0 A		
Cos phi - power factor:	0.91-0.88		
Rated speed:	480-3540 rpm		
Efficiency:	IE3 92,4%		
Motor efficiency at full load:	92.4 %		
Number of poles:	2		
Enclosure class (IEC 34-5):	IP55		
Insulation class (IEC 85):	F		
Motor protec:	YES		

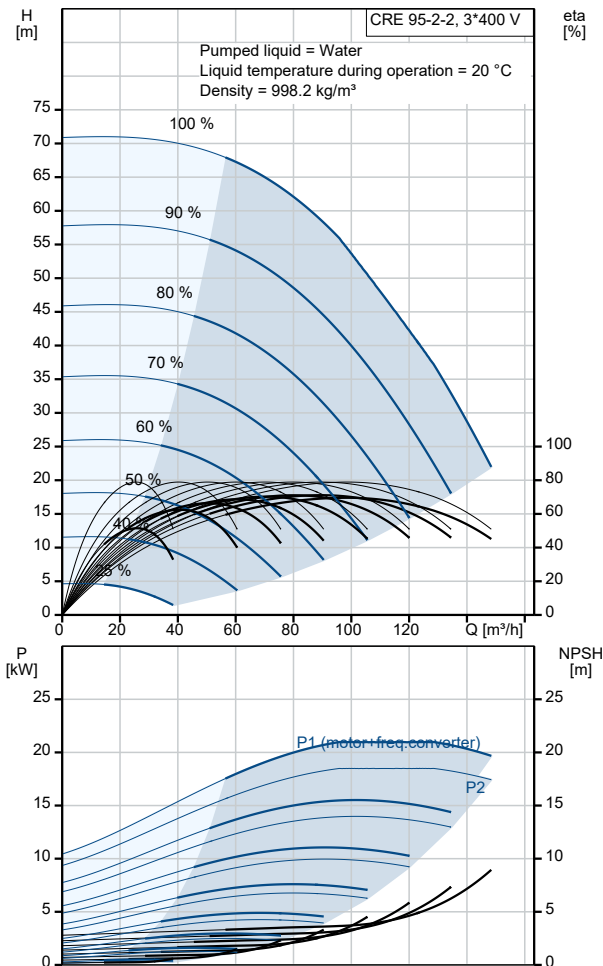


Description	Value
Motor No:	85901026
Controls:	
Function Module:	ADVANCED I/O
Frequency converter:	Built-in
Pressure sensor:	N
Others:	
DOE Pump Energy Index CL:	0.00
DOE Pump Energy Index VL:	0.00
Net weight:	251 kg
Gross weight:	314 kg
Shipping volume:	1.14 m ³
Config. file no:	95139531
Thrust handling device:	N
Country of origin:	DK
Custom tariff no.:	84137075

99264359 CRE 95-2-2 A-F-A-E-HQQE 50 Hz

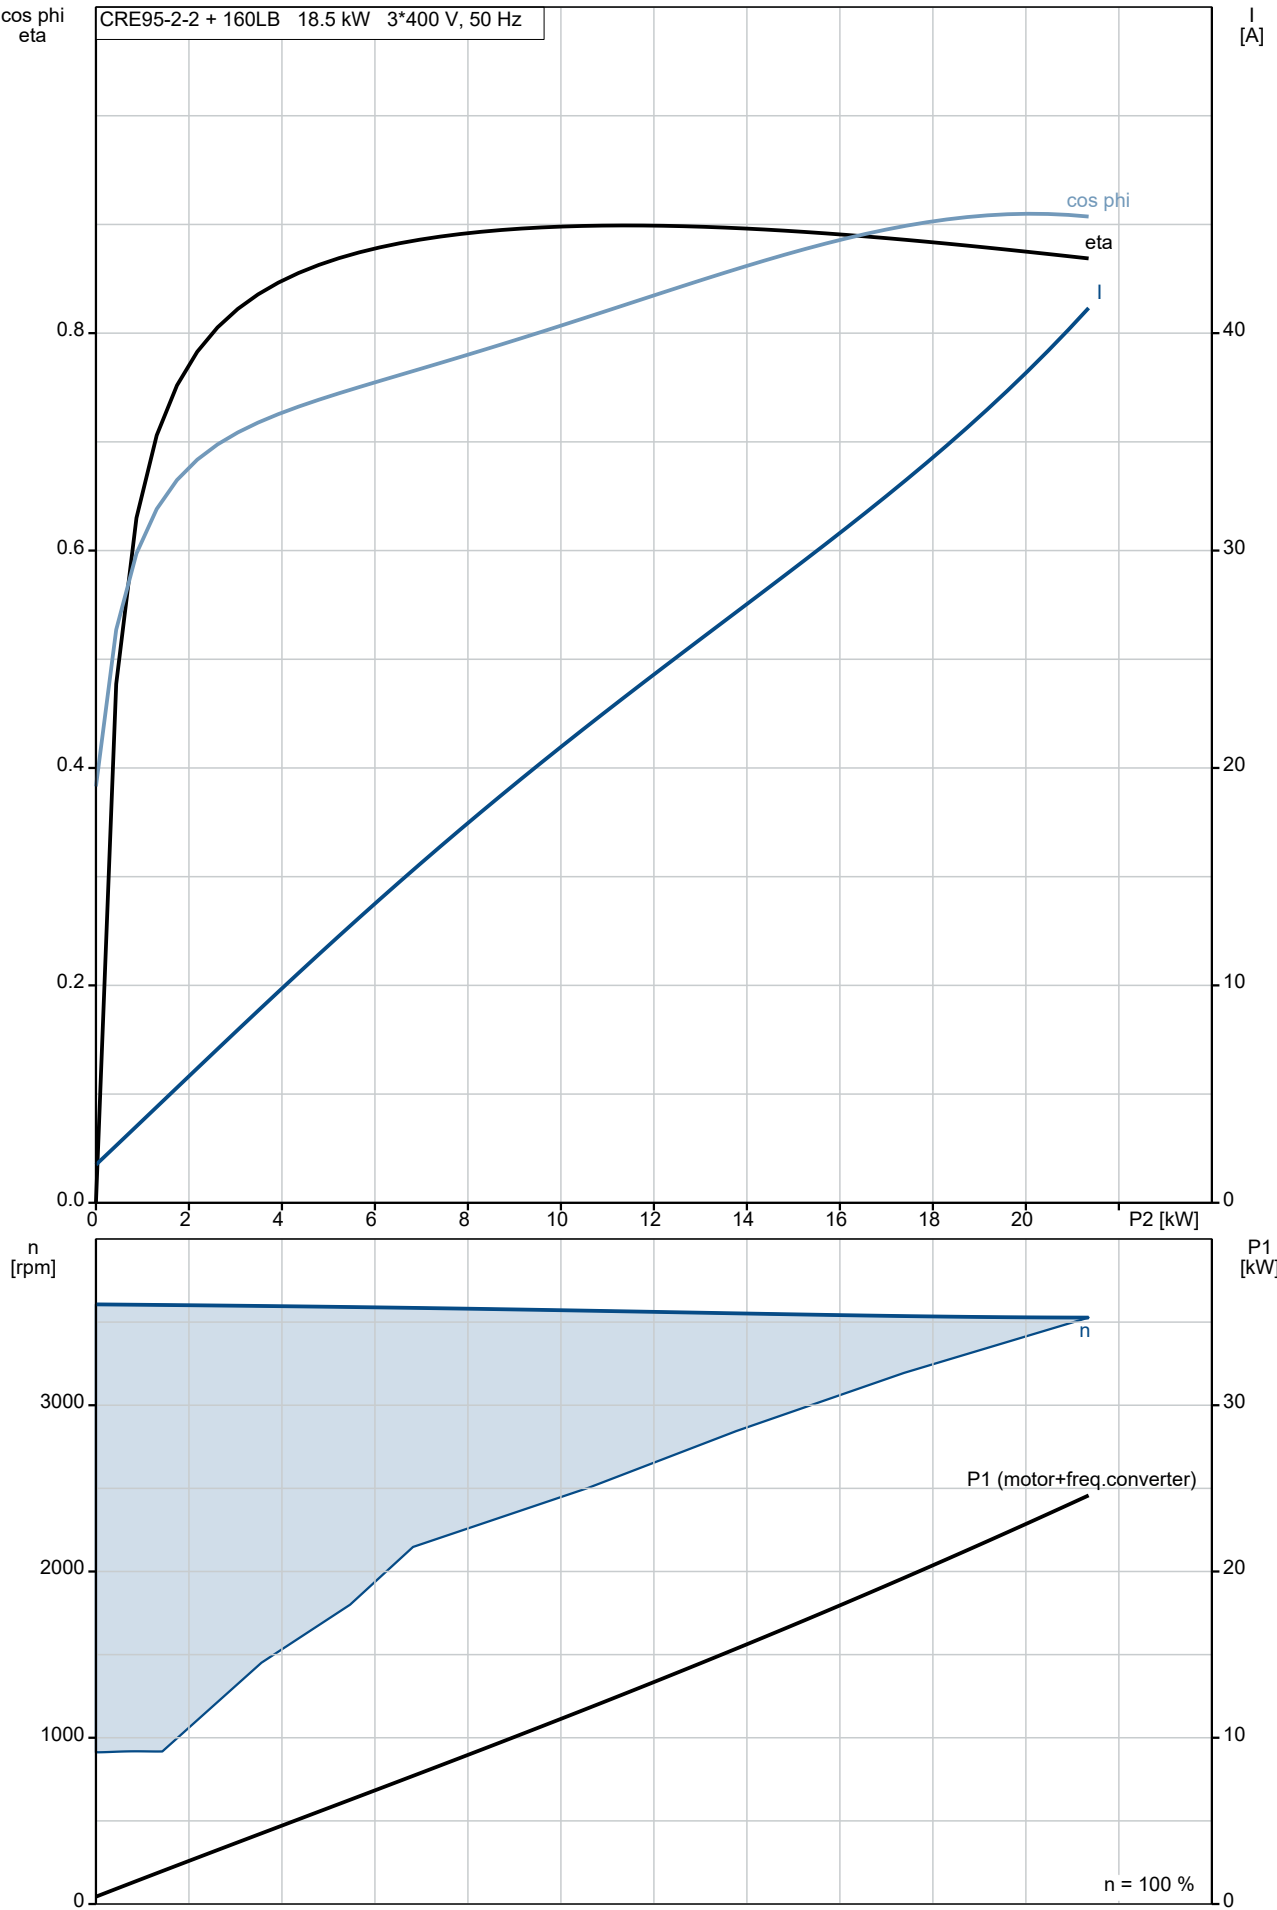

99264359 CRE 95-2-2 A-F-A-E-HQQE 50 Hz

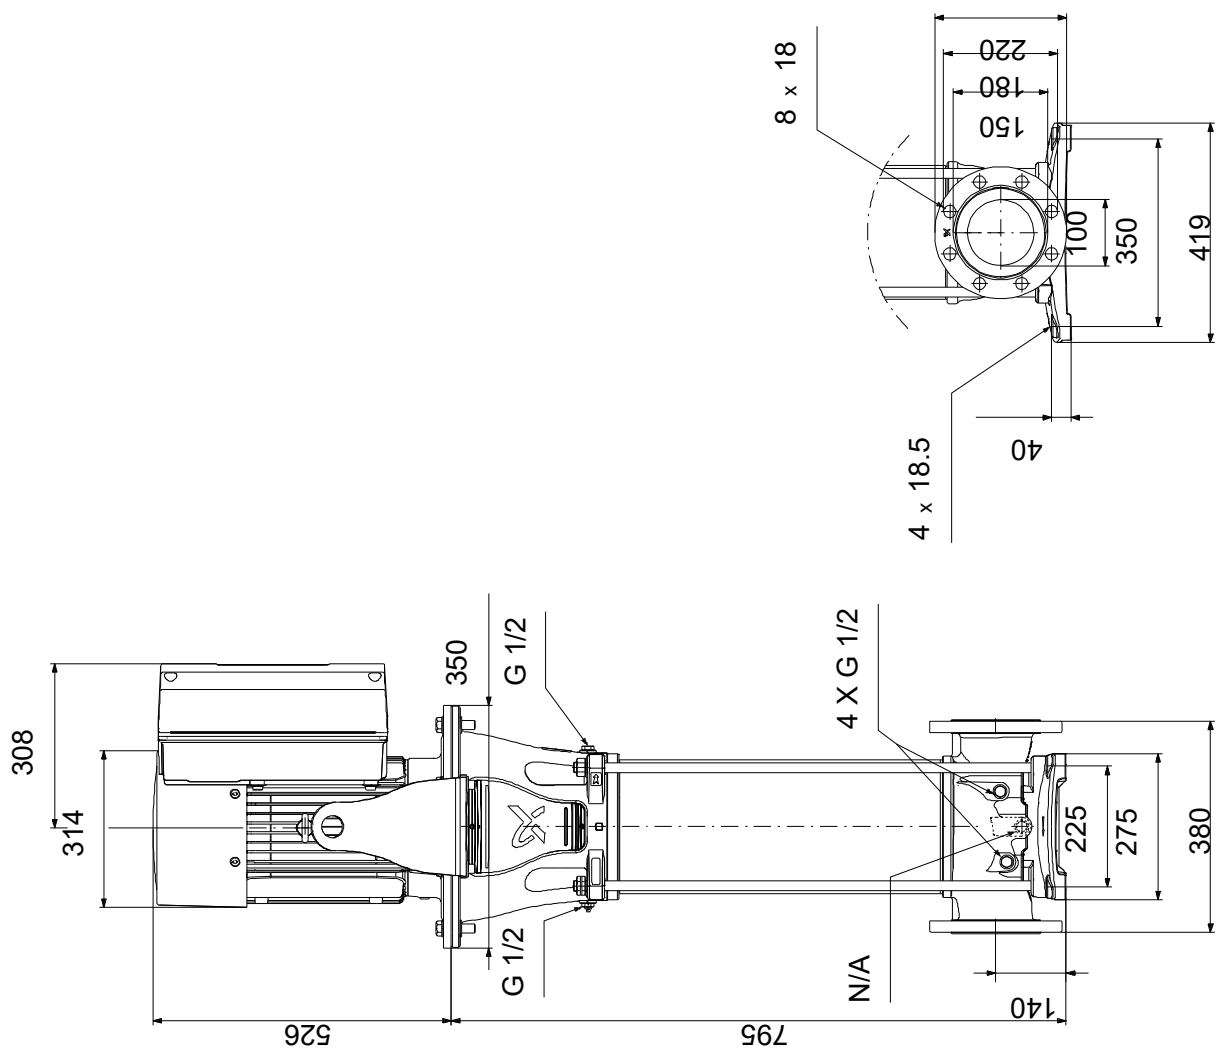

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts CRE 95-2-2, Product No. 99264359
Produced After 1827 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Kit, bearing			99415812	1	pcs
- 47a	Bearing cpl.				1	
	Driver				1	
	Retainer				1	
-	Kit, bracket			99432728	1	pcs
2d	Plug				4	
2c	Bracket				4	
-	Kit, coupling			99190035	1	pcs
- 7	Coupling cpl.				1	
10a	Coupling				2	
9	Hex socket head cap screw	Designation: DIN 912			4	
		Length (mm): 25				
		Thread: M10				
10	Parallel pin				1	
-	Kit, coupling guard			99196379	2	pcs
7b	Lock washer				2	
7a	Screw				2	
7	Coupling guard				1	
-	Kit, flange			99432754	1	pcs
440b	Lock ring				1	
440a	Flange	Diameter: DN 100			1	
		Pressure: PN 16				
-	Kit, impeller, reduced, 1st.			99554054	2	pcs
48	Nut				1	
49h	Impeller				1	
49b	Split cone				1	
-	Kit, O-rings			99262378	1	pcs
37	O-ring				2	
38	O-ring				8	
109	O-ring				1	
110	O-ring	Diameter: 21,5			1	
		Material type: EPDM				
		Thickness: 4,25				
-	Kit, plug			99262366	1	pcs
-	Plug cpl.				5	
25	Plug				1	
38	O-ring				1	
-	Air vent screw				1	
- 18	Air vent screw				1	
	Spindle					
	Plug					
38	O-ring				1	
-	Kit, shaft seal HQQE			99262346	1	pcs
	Grinding device				1	
105	Shaft seal				1	
-	Kit, staybolts			99190079	4	pcs
26	Staybolt				1	
36	Nut				1	
66a	Washer				1	
-	Kit, strap			99190047	2	pcs
26c	Washer	Designation: DIN 125A			1	
		Thickness: 1,6				
26b	Hex head screw				1	
26a	Strap				1	
-	Kit, wear parts			99262415	1	pcs
	Adjusting fork				1	
45	Neck ring				4	
47d	Lock ring				3	
47c	Bush				3	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
65	Neck ring retainer				4	
-	Motor				1	pcs
-	Kit, bearing cpl.			96796676	1	
32b	Waved washer				2	
153	Angular-contact bearing				1	
154	Ball bearing				1	
157	O-ring				1	
159	V-ring				1	
-	Kit, bearing plate			96796664	1	
155.a	Bearing cover				1	
208a	Gasket				3	
208	Hex socket head cap screw		Designation: DIN912		3	
			Length (mm): 40			
			Thread: M5			
-	Kit, connector plugs			96348923	1	
	Connector plug 5-pole				1	
	Connector plug 4-pole				1	
	Connector plug 4-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug 3-pole				1	
	Connector plug				1	
- 273	Kit, control board			96348918	1	
	Service kit instruction				1	
	Controlboard				1	
-	Kit, eyebolt			96796712	1	
189	Eyebolt				2	
-	Kit, fan cover			96830826	1	
151	Fan cover				1	
152.a	Rubber bush				4	
152	Hex head cap screw				4	
196	Diaphragm				1	
-	Kit, flange			96796662	1	
156.b	Flange				1	
159.b	Seal ring				1	
185.b	Nut				4	
185	Hex socket head cap screw				4	
186	Drain plug				4	
195.a	Grease nipple				1	
-	Kit, funct. module - adv. I/O			96348936	1	
263	Add-on module, cpl. w/plugs				1	
-	Kit, funct. module -Geni/RS485			96348932	1	
263	Add-on module, cpl. w/plugs				1	
-	Kit, gaskets			96798508	1	
184	O-ring		Diameter: 235		2	
275	Kit, inverter board			96348920	1	
-	Kit, lubrication nipple			96796671	1	
195.b	Grease nipple				2	
195.a	Grease nipple				1	
-	Kit, ND-end shield cpl.			96796669	1	
32b	Waved washer				1	
156.a	End shield NDE				1	
157	O-ring				1	
159	V-ring				1	
185.c	Nut				4	
185.a	Hex socket head cap screw				4	
195.b	Grease nipple				1	
-	Kit, opr. panel			96348924	1	
259	Operation panel				1	
274	Kit, rectifier board			96348921	1	
-	Kit, terminal box			96348914	1	
164	Cover cpl.				1	
166	Pan head thread forming screw				5	

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
251	Terminal box				1	
277	Blind cover				1	
283	Motor cover cpl.				1	
284	Cover				1	
-	Kit, varistor			96348917	1	
279.b	Pan head thread forming screw				2	
279	Varistor				1	
1a	Motor stool			99759902	1	pcs
+ 3	Chamber			99262580	1	pcs
- 3	Chamber			99262628	1	pcs
47c	Bush			99321194	1	
+ 3	Chamber			99196630	1	pcs
+ 4a	Chamber			99446221	1	pcs
+ 4a	Chamber			99446252	1	pcs
+ 4a	Chamber			99415870	1	pcs
6	Base			99196466	1	pcs
26c	Washer	Designation: DIN 125A		99262704	2	pcs
		Thickness: 1,6				
26c	Washer	Designation: DIN 125A		99886930	2	pcs
		Thickness: 1,6				
28a	Hex head screw			96620478	4	pcs
32	Washer	Designation: DIN 125 A		98923051	8	pcs
		Internal diameter: 17				
		Outer diameter: 30				
		Thickness: 3				
36	Nut			99262692	4	pcs
+ 44	Suction part			99196612	1	pcs
44a	Discharge part			99196620	1	pcs
48	Nut			99262680	2	pcs
48	Nut			99262683	2	pcs
48	Nut			96536016	2	pcs
49h	Impeller			99262539	2	pcs
49h	Impeller			99262563	2	pcs
49b	Split cone			99262686	2	pcs
49b	Split cone			99262689	2	pcs
51	Shaft			99196529	1	pcs
55	Sleeve			99196402	1	pcs
56	Base plate			99196483	1	pcs
66a	Washer			99262699	4	pcs