



POMPTECHNIEK • SERVICE • ONDERHOUD

Inventflow: Grundfos A-partner

Grundfos TPE 200-330/4 NC-A-F-A-BQQE-SX3

Find the pump here:

<https://inventflow.nl/en/pompenfilter/tpe/grundfos-tpe-200-330-4-nc-a-f-a-bqqe-sx3>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description																																
1	TPE 200-330/4 NC-A-F-A-BQQE-SX3  Note! Product picture may differ from actual product Product No.: 99473957 Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Flange standard: Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2). The pump is fitted with a fan-cooled asynchronous motor. The pump includes a frequency converter and PI controller. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. Controls: <table> <tr> <td>VFD product number:</td><td>99448800</td></tr> <tr> <td>Frequency converter:</td><td>Built-in</td></tr> <tr> <td>Type of frequency converter:</td><td>CUE 3X380-500V IP55 RUG 37KW</td></tr> <tr> <td>Appr. for VFD:</td><td>CE, CULUS, C-TICK</td></tr> </table> Liquid: <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>-25 .. 120 °C</td></tr> <tr> <td>Selected liquid temperature:</td><td>20 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: <table> <tr> <td>Pump speed on which pump data are based:</td><td>1480 rpm</td></tr> <tr> <td>Rated flow:</td><td>354 m³/h</td></tr> <tr> <td>Rated head:</td><td>28.6 m</td></tr> <tr> <td>Actual impeller diameter:</td><td>310 mm</td></tr> <tr> <td>Code for shaft seal:</td><td>BQQE</td></tr> <tr> <td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr> </table> Materials: <table> <tr> <td>Pump housing:</td><td>Cast iron EN-GJL-250 ASTM class 35</td></tr> <tr> <td>Impeller:</td><td>Cast iron EN-GJL-200</td></tr> </table>	VFD product number:	99448800	Frequency converter:	Built-in	Type of frequency converter:	CUE 3X380-500V IP55 RUG 37KW	Appr. for VFD:	CE, CULUS, C-TICK	Pumped liquid:	Water	Liquid temperature range:	-25 .. 120 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m ³	Pump speed on which pump data are based:	1480 rpm	Rated flow:	354 m ³ /h	Rated head:	28.6 m	Actual impeller diameter:	310 mm	Code for shaft seal:	BQQE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	Cast iron EN-GJL-250 ASTM class 35	Impeller:	Cast iron EN-GJL-200
VFD product number:	99448800																																
Frequency converter:	Built-in																																
Type of frequency converter:	CUE 3X380-500V IP55 RUG 37KW																																
Appr. for VFD:	CE, CULUS, C-TICK																																
Pumped liquid:	Water																																
Liquid temperature range:	-25 .. 120 °C																																
Selected liquid temperature:	20 °C																																
Density:	998.2 kg/m ³																																
Pump speed on which pump data are based:	1480 rpm																																
Rated flow:	354 m ³ /h																																
Rated head:	28.6 m																																
Actual impeller diameter:	310 mm																																
Code for shaft seal:	BQQE																																
Curve tolerance:	ISO9906:2012 3B																																
Pump housing:	Cast iron EN-GJL-250 ASTM class 35																																
Impeller:	Cast iron EN-GJL-200																																

Qty.	Description
	ASTM class 30
	Installation:
	Range of ambient temperature: -20 .. 55 °C
	Maximum operating pressure: 16 bar
	Max pressure at stated temp: 16 bar / 120 °C
	Type of connection: DIN
	Size of connection: DN 200
	Pressure rating for connection: PN 16
	Port-to-port length: 1000 mm
	Flange size for motor: FF400
	Electrical data:
	Motor type: SIEMENS
	IE Efficiency class: IE3
	Rated power - P2: 37 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-420D/660-725Y V
	Rated current: 69,0-64,0/39,5-37,0 A
	Starting current: 640-640 %
	Cos phi - power factor: 0.9
	Rated speed: 1480 rpm
	Efficiency: IE3 93,9%
	Motor efficiency at full load: 93.9-93.9 %
	Motor efficiency at 3/4 load: 94.5-94.5 %
	Motor efficiency at 1/2 load: 94.4-94.4 %
	Number of poles: 4
	Enclosure class (IEC 34-5): IP55
	Insulation class (IEC 85): F
	Motor No: 99454136
	Others:
	Minimum efficiency index, MEI ≥: 0.70
	Net weight: 853 kg
	Gross weight: 1020 kg
	Shipping volume: 3.55 m³
	Country of origin: HU
	Custom tariff no.: 84137051

99473957 TPE 200-330/4 NC-A-F-A-BQQE-SX3 50 Hz


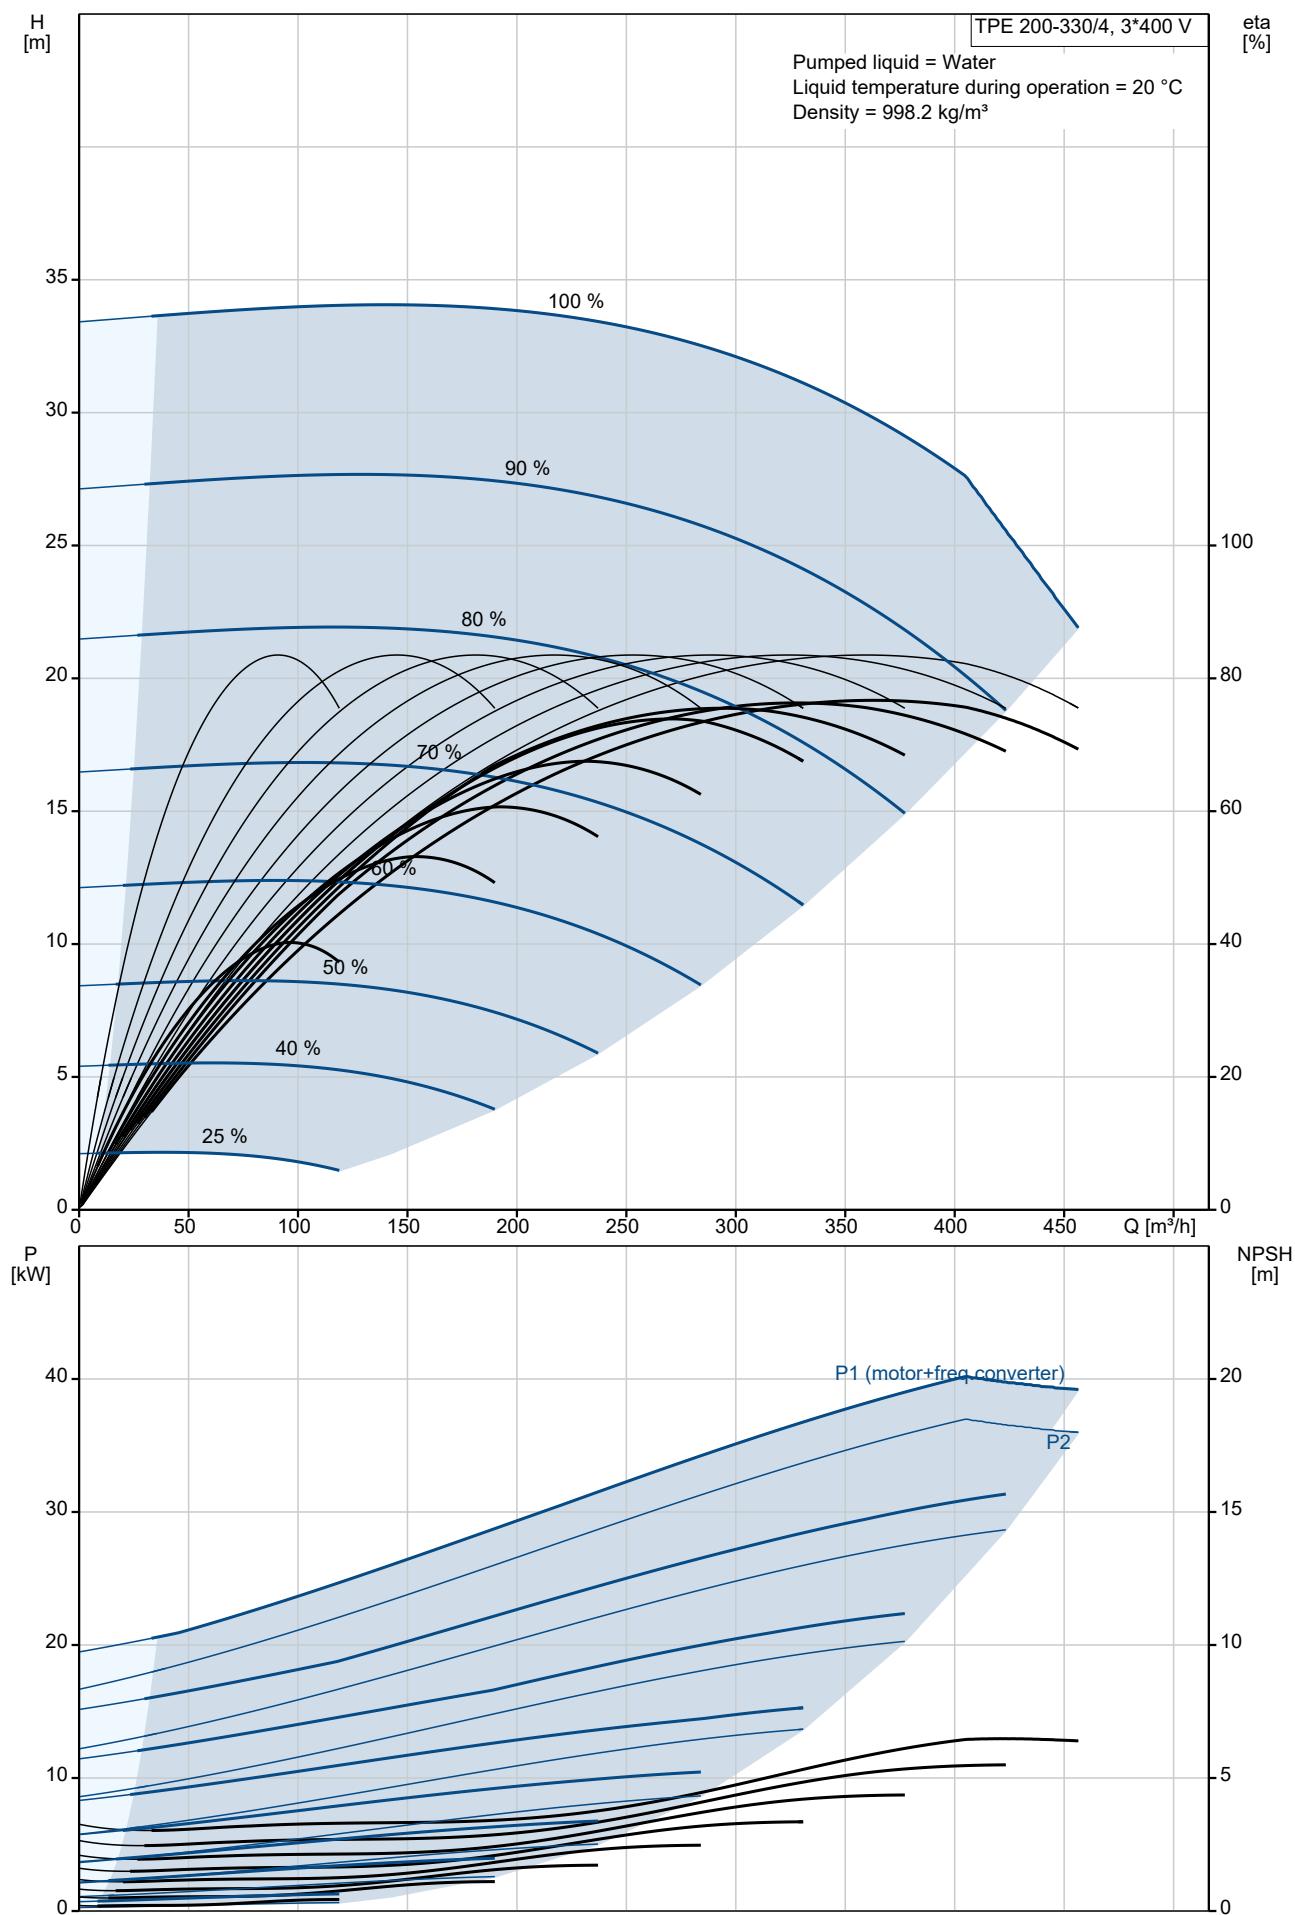


Description	Value
General information:	
Product name:	TPE 200-330/4 NC-A-F-A-BQQE-SX3
Product No:	99473957
EAN number:	5713829699458
Technical:	
Pump speed on which pump data are based:	1480 rpm
Rated flow:	354 m³/h
Rated head:	28.6 m
Maximum head:	330 dm
Actual impeller diameter:	310 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 55 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 120 °C
Type of connection:	DIN
Size of connection:	DN 200
Pressure rating for connection:	PN 16
Port-to-port length:	1000 mm
Flange size for motor:	FF400
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	37 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	69,0-64,0/39,5-37,0 A
Starting current:	640-640 %
Cos phi - power factor:	0.9
Rated speed:	1480 rpm
Efficiency:	IE3 93,9%
Motor efficiency at full load:	93.9-93.9 %
Motor efficiency at 3/4 load:	94.5-94.5 %
Motor efficiency at 1/2 load:	94.4-94.4 %
Number of poles:	4
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	99454136
Controls:	
VFD product number:	99448800
Frequency converter:	Built-in
Type of frequency converter:	CUE 3X380-500V IP55 RUG 37KW
Appr. for VFD:	CE, CULUS, C-TICK
Others:	
Minimum efficiency index, MEI ≥:	0.70

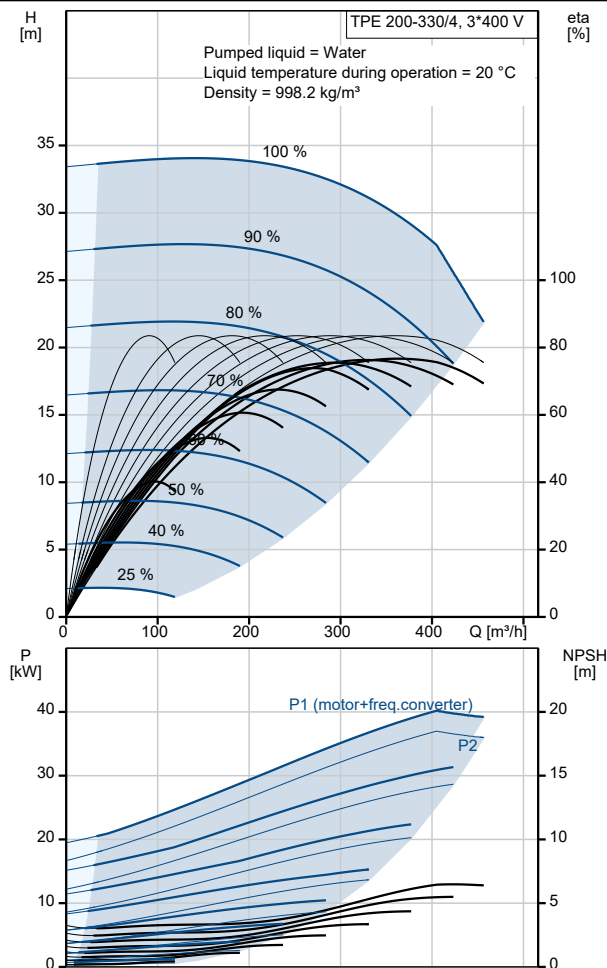

Description	Value
Net weight:	853 kg
Gross weight:	1020 kg
Shipping volume:	3.55 m ³
Config. file no:	99465418
Country of origin:	HU
Custom tariff no.:	84137051

99473957 TPE 200-330/4 NC-A-F-A-BQQE-SX3 50 Hz

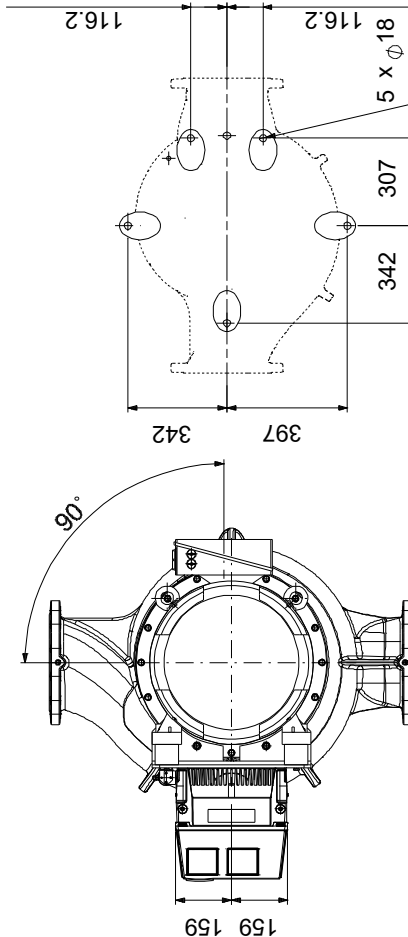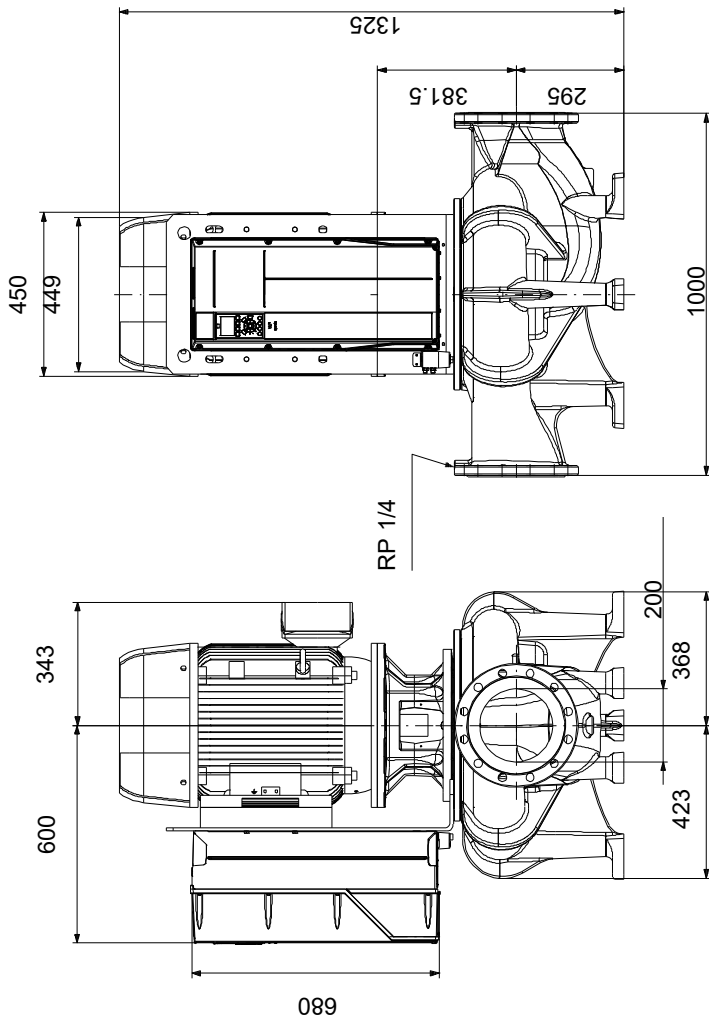

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts TPE 200-330/4, Product No. 99473957
Produced After 1339 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
-	Spare, wear ring			99208743	1	pcs
45	Wear ring				1	
	Control card			99590986	1	pcs
	Control panel			99591437	1	pcs
9	Current sensor			96809465	1	pcs
4	Fan, internal			96809361	1	pcs
6	Fan, main			96809614	1	pcs
8	IGBT			96809410	1	pcs
5	Power card			96809729	1	pcs
7	Rectifier/thyristor			96809429	1	pcs
-	Motor				1	pcs
- 153	Ball bearing			99511025	1	
153	Ball bearing				1	
156	Kit, fan			98062265	1	
151	Kit, fan cover			98062275	1	
164a	Kit, terminal box			98062262	1	
18	Plug			96620482	1	pcs
18	Plug			98164277	1	pcs
19	Plug			98163028	2	pcs
26	Staybolt		Length (mm): 55 Thread: M16	97512567	4	pcs
28	Hex head screw		Length (mm): 60 Thread: M16	97506949	8	pcs
36	Hex nut		Thread: M16	96620480	4	pcs
49	Impeller		Outer diameter: 310	96930749	1	pcs
67	Nut		Thread: M27	92526534	1	pcs
72a	O-ring		Diameter: 66 Material type: RUBBER Thickness: 3,53	92547638	1	pcs
72a	O-ring		Diameter: 66 Material type: RUBBER Thickness: 3,53	92526512	1	pcs
72a	O-ring		Diameter: 66 Material type: RUBBER Thickness: 3,53	97511857	1	pcs
72a	O-ring		Diameter: 66 Material type: RUBBER Thickness: 3,53	97757676	1	pcs