

Inventflow: Grundfos A-partner

Grundfos TPE 100-410/4 NC-A-F-A-BQQE-QX3

Find the pump here:

<https://inventflow.nl/en/pompenfilter/tpe/grundfos-tpe-100-410-4-nc-a-f-a-bqqe-qx3>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description																										
1	TPE 100-410/4 NC-A-F-A-BQQE-QX3  Note! Product picture may differ from actual product Product No.: 99473964 Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Flange standard: Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2). The pump is fitted with a fan-cooled asynchronous motor. The pump includes a frequency converter and PI controller. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. <table data-bbox="204 1326 948 1471"> <tr><td colspan="2">Controls:</td></tr> <tr><td>VFD product number:</td><td>99448797</td></tr> <tr><td>Frequency converter:</td><td>Built-in</td></tr> <tr><td>Type of frequency converter:</td><td>CUE 3X380-500V IP55 RUG 22KW</td></tr> <tr><td>Appr. for VFD:</td><td>CE, CULUS, C-TICK</td></tr> </table> <table data-bbox="204 1503 703 1648"> <tr><td colspan="2">Liquid:</td></tr> <tr><td>Pumped liquid:</td><td>Water</td></tr> <tr><td>Liquid temperature range:</td><td>-25 .. 120 °C</td></tr> <tr><td>Selected liquid temperature:</td><td>20 °C</td></tr> <tr><td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: Pump speed on which pump data are based: 1465 rpm Rated flow: 171 m³/h Rated head: 32.7 m Actual impeller diameter: 334 mm Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B <table data-bbox="204 1915 730 2092"> <tr><td colspan="2">Materials:</td></tr> <tr><td>Pump housing:</td><td>Cast iron EN-GJL-250 ASTM class 35</td></tr> <tr><td>Impeller:</td><td>Cast iron EN-GJL-200</td></tr> </table>	Controls:		VFD product number:	99448797	Frequency converter:	Built-in	Type of frequency converter:	CUE 3X380-500V IP55 RUG 22KW	Appr. for VFD:	CE, CULUS, C-TICK	Liquid:		Pumped liquid:	Water	Liquid temperature range:	-25 .. 120 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m³	Materials:		Pump housing:	Cast iron EN-GJL-250 ASTM class 35	Impeller:	Cast iron EN-GJL-200
Controls:																											
VFD product number:	99448797																										
Frequency converter:	Built-in																										
Type of frequency converter:	CUE 3X380-500V IP55 RUG 22KW																										
Appr. for VFD:	CE, CULUS, C-TICK																										
Liquid:																											
Pumped liquid:	Water																										
Liquid temperature range:	-25 .. 120 °C																										
Selected liquid temperature:	20 °C																										
Density:	998.2 kg/m³																										
Materials:																											
Pump housing:	Cast iron EN-GJL-250 ASTM class 35																										
Impeller:	Cast iron EN-GJL-200																										

Qty.	Description
	ASTM class 30
	Installation:
	Range of ambient temperature: -20 .. 55 °C
	Maximum operating pressure: 16 bar
	Max pressure at stated temp: 16 bar / 120 °C
	Type of connection: DIN
	Size of connection: DN 100
	Pressure rating for connection: PN 16
	Port-to-port length: 670 mm
	Flange size for motor: FF300
	Electrical data:
	Motor type: SIEMENS
	IE Efficiency class: IE3
	Rated power - P2: 22 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-420D/660-725Y V
	Rated current: 42,5-40,5/24,6-23,6 A
	Starting current: 680-680 %
	Cos phi - power factor: 0.8
	Rated speed: 1470 rpm
	Efficiency: IE3 93,0%
	Motor efficiency at full load: 93.0-93.0 %
	Motor efficiency at 3/4 load: 93.7-93.7 %
	Motor efficiency at 1/2 load: 93.7-93.7 %
	Number of poles: 4
	Enclosure class (IEC 34-5): IP55
	Insulation class (IEC 85): F
	Motor No: 99454134
	Others:
	Minimum efficiency index, MEI ≥: 0.69
	Net weight: 401 kg
	Gross weight: 546 kg
	Shipping volume: 1.76 m³
	Country of origin: HU
	Custom tariff no.: 84137051

99473964 TPE 100-410/4 NC-A-F-A-BQQE-QX3 50 Hz

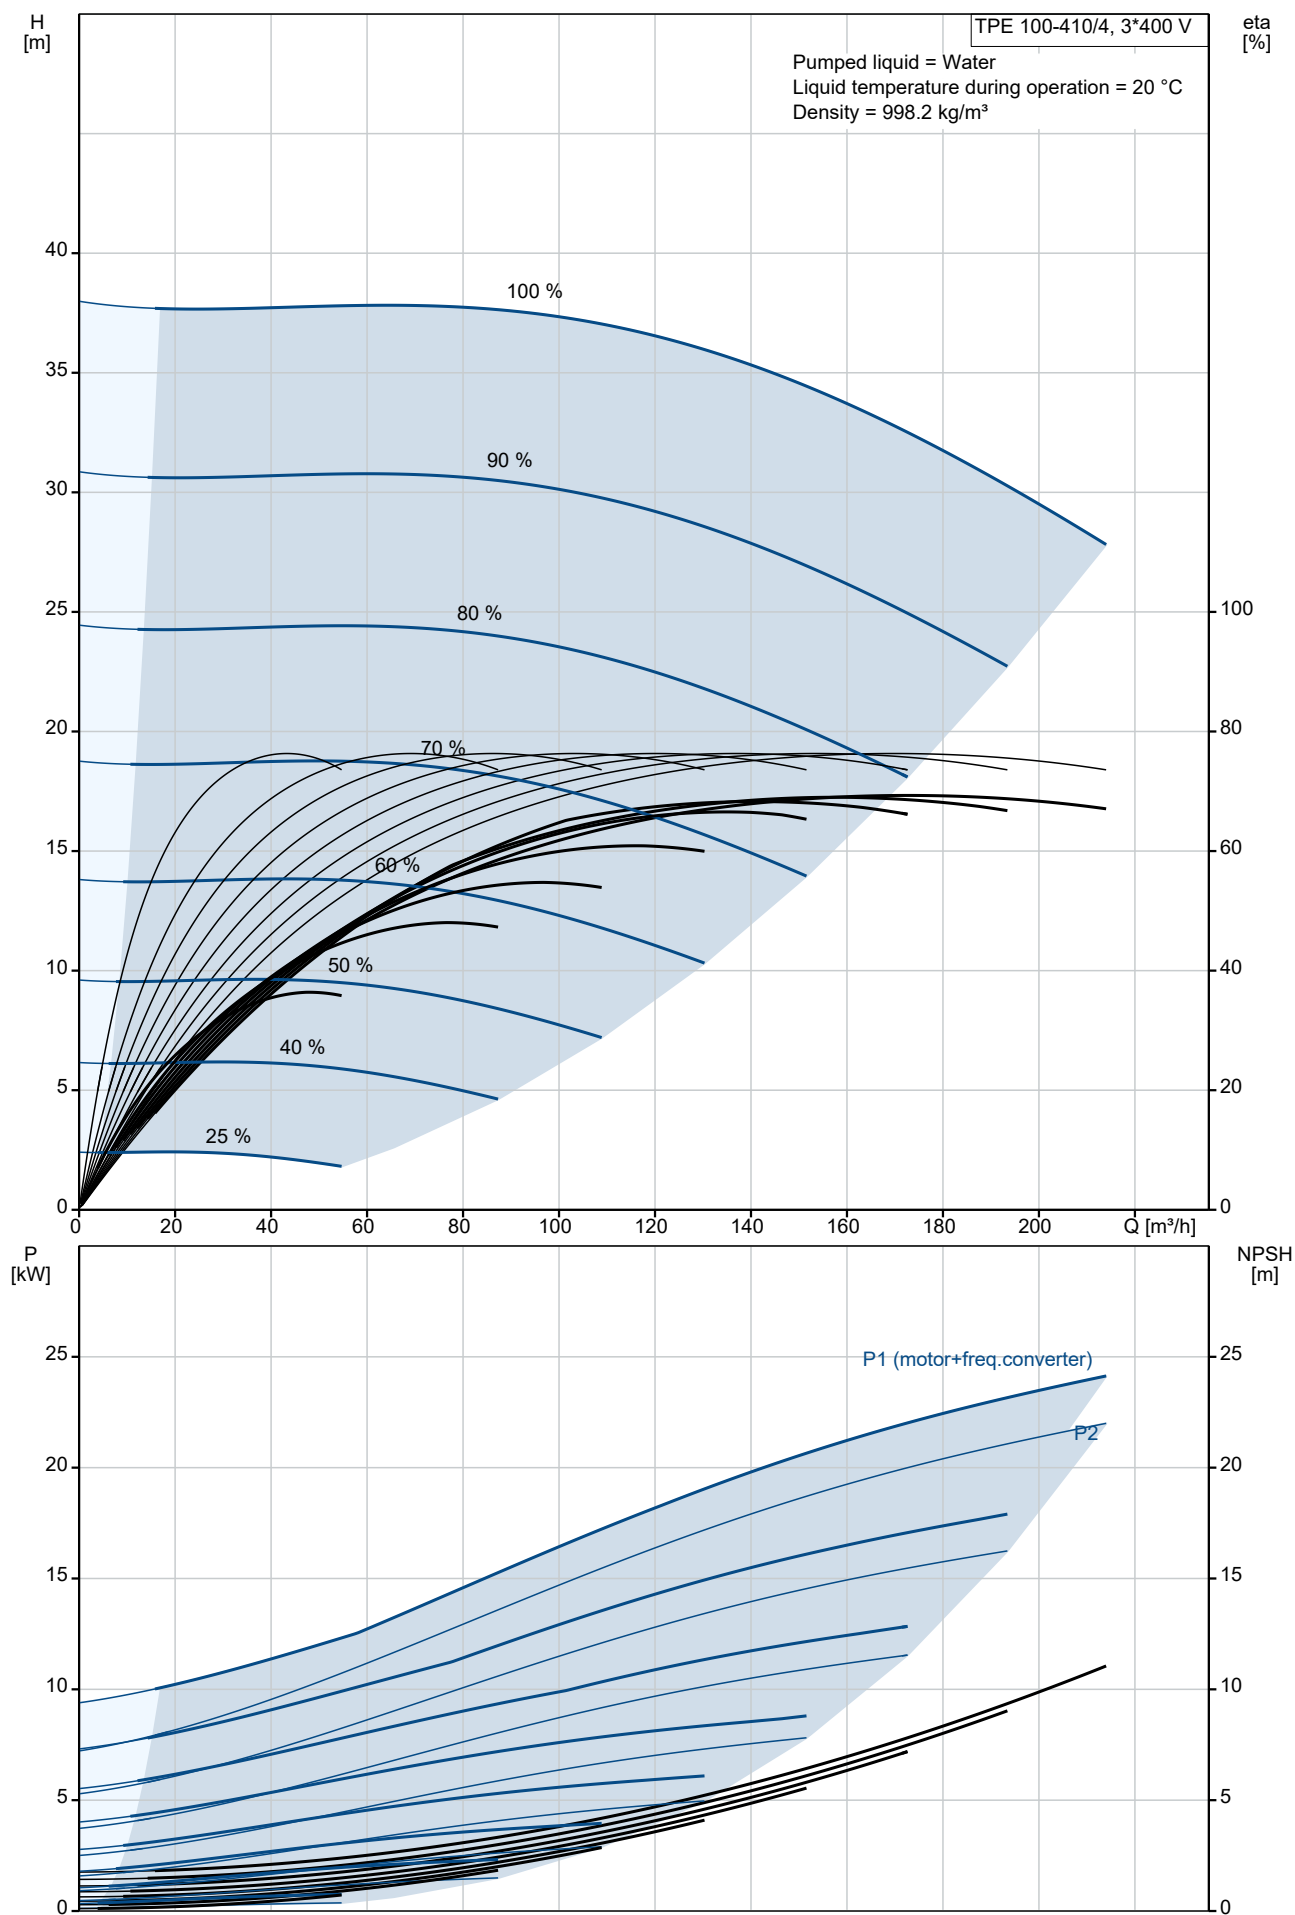


Description	Value
General information:	
Product name:	TPE 100-410/4 NC-A-F-A-BQQE-QX3
Product No:	99473964
EAN number:	5713829699595
Technical:	
Pump speed on which pump data are based:	1465 rpm
Rated flow:	171 m³/h
Rated head:	32.7 m
Maximum head:	410 dm
Actual impeller diameter:	334 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 55 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 120 °C
Type of connection:	DIN
Size of connection:	DN 100
Pressure rating for connection:	PN 16
Port-to-port length:	670 mm
Flange size for motor:	FF300
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	22 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	42,5-40,5/24,6-23,6 A
Starting current:	680-680 %
Cos phi - power factor:	0.8
Rated speed:	1470 rpm
Efficiency:	IE3 93,0%
Motor efficiency at full load:	93.0-93.0 %
Motor efficiency at 3/4 load:	93.7-93.7 %
Motor efficiency at 1/2 load:	93.7-93.7 %
Number of poles:	4
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	99454134
Controls:	
VFD product number:	99448797
Frequency converter:	Built-in
Type of frequency converter:	CUE 3X380-500V IP55 RUG 22kW
Appr. for VFD:	CE, CULUS, C-TICK
Others:	
Minimum efficiency index, MEI ≥:	0.69

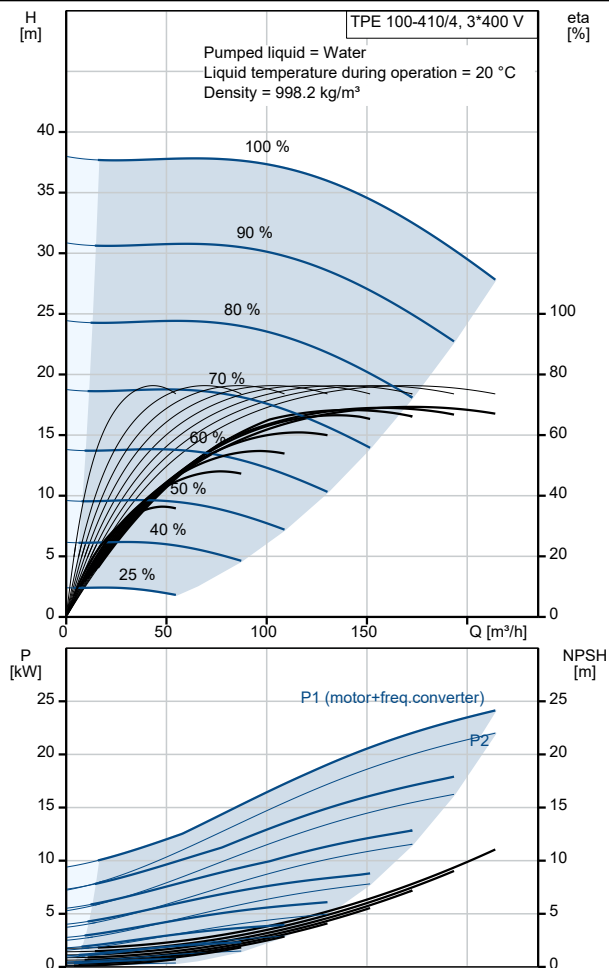

Description	Value
Net weight:	401 kg
Gross weight:	546 kg
Shipping volume:	1.76 m ³
Config. file no:	99465432
Country of origin:	HU
Custom tariff no.:	84137051

99473964 TPE 100-410/4 NC-A-F-A-BQQE-QX3 50 Hz

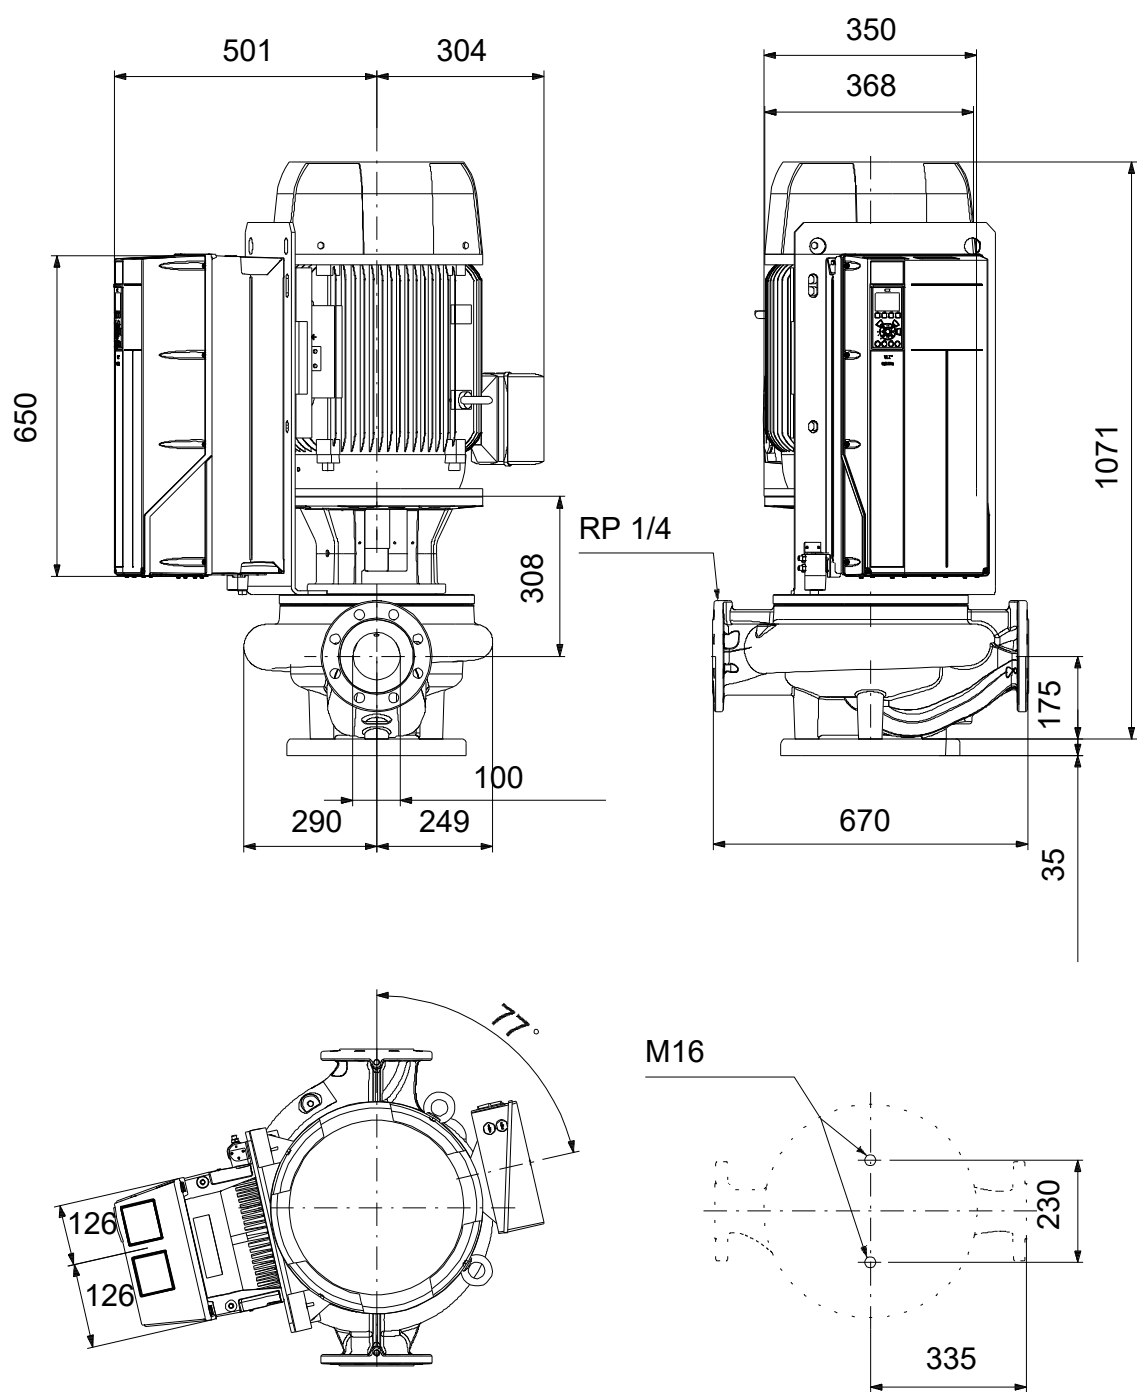

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts TPE 100-410/4, Product No. 99473964
Produced After 2050 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
- 56	Base plate			96536246	1	pcs
28g	Hex head cap screw		Length (mm): 30 MM		2	
			Thread: M16			
56	Base plate				1	
-	Spare, wear ring			99208810	1	pcs
45	Wear ring				1	
	Control card			99590986	1	pcs
	Control panel			99591437	1	pcs
4	Fan, internal			96901612	1	pcs
6	Fan, main			96809605	1	pcs
5	Power card			96809725	1	pcs
3	SMPS			96809376	1	pcs
	Staybolt			97512560	4	pcs
-	Motor				1	pcs
- 153	Ball bearing			99510992	1	
153	Ball bearing				1	
156	Kit, fan			98507819	1	
151	Kit, fan cover			98920945	1	
18	Plug			96620482	1	pcs
18	Plug			98164277	1	pcs
19	Plug			98163028	2	pcs
28	Hex head screw			96620478	4	pcs
36	Hex nut		Thread: M16	96620480	4	pcs
36	Nut		Thread: M12	96620479	4	pcs
49	Impeller			96794897	1	pcs
56	Base plate			99788464	1	pcs
67	Nut		Thread: M18	92526535	1	pcs
72a	O-ring		Diameter: 329,79	92547632	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	92526511	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	97511846	1	pcs
			Material type: EPDM			
			Thickness: 3,53			
72a	O-ring		Diameter: 329,79	97757675	1	pcs
			Material type: EPDM			
			Thickness: 3,53			