

Inventflow: Grundfos A-partner

Grundfos TPE 125-340/4 SC-A-F-A-BQQE-QX3

Find the pump here:

<https://inventflow.nl/en/pompenfilter/tpe/grundfos-tpe-125-340-4-sc-a-f-a-bqqe-qx3>

Contact

info@inventflow.nl

+31 (0) 546 45 80 72


Datasheet




Qty.	Description																																
1	TPE 125-340/4 SC-A-F-A-BQQE-QX3  Note! Product picture may differ from actual product Product No.: 99474588 Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Flange standard: Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2). The pump is fitted with a fan-cooled asynchronous motor. The pump includes a frequency converter and PI controller. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. The pump is fitted with a differential-pressure sensor. Controls: <table> <tr> <td>VFD product number:</td><td>99448797</td></tr> <tr> <td>Frequency converter:</td><td>Built-in</td></tr> <tr> <td>Type of frequency converter:</td><td>CUE 3X380-500V IP55 RUG 22KW</td></tr> <tr> <td>Appr. for VFD:</td><td>CE, CULUS, C-TICK</td></tr> </table> Liquid: <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>-25 .. 120 °C</td></tr> <tr> <td>Selected liquid temperature:</td><td>20 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: <table> <tr> <td>Pump speed on which pump data are based:</td><td>1470 rpm</td></tr> <tr> <td>Rated flow:</td><td>191 m³/h</td></tr> <tr> <td>Rated head:</td><td>30.9 m</td></tr> <tr> <td>Actual impeller diameter:</td><td>312 mm</td></tr> <tr> <td>Code for shaft seal:</td><td>BQQE</td></tr> <tr> <td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr> </table> Materials: <table> <tr> <td>Pump housing:</td><td>Cast iron EN-GJL-250 ASTM class 35</td></tr> <tr> <td>Impeller:</td><td>Cast iron EN-GJL-200</td></tr> </table>	VFD product number:	99448797	Frequency converter:	Built-in	Type of frequency converter:	CUE 3X380-500V IP55 RUG 22KW	Appr. for VFD:	CE, CULUS, C-TICK	Pumped liquid:	Water	Liquid temperature range:	-25 .. 120 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m ³	Pump speed on which pump data are based:	1470 rpm	Rated flow:	191 m ³ /h	Rated head:	30.9 m	Actual impeller diameter:	312 mm	Code for shaft seal:	BQQE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	Cast iron EN-GJL-250 ASTM class 35	Impeller:	Cast iron EN-GJL-200
VFD product number:	99448797																																
Frequency converter:	Built-in																																
Type of frequency converter:	CUE 3X380-500V IP55 RUG 22KW																																
Appr. for VFD:	CE, CULUS, C-TICK																																
Pumped liquid:	Water																																
Liquid temperature range:	-25 .. 120 °C																																
Selected liquid temperature:	20 °C																																
Density:	998.2 kg/m ³																																
Pump speed on which pump data are based:	1470 rpm																																
Rated flow:	191 m ³ /h																																
Rated head:	30.9 m																																
Actual impeller diameter:	312 mm																																
Code for shaft seal:	BQQE																																
Curve tolerance:	ISO9906:2012 3B																																
Pump housing:	Cast iron EN-GJL-250 ASTM class 35																																
Impeller:	Cast iron EN-GJL-200																																

Qty.	Description
	ASTM class 30
	Installation:
	Range of ambient temperature: -20 .. 55 °C
	Maximum operating pressure: 16 bar
	Max pressure at stated temp: 16 bar / 120 °C
	Type of connection: DIN
	Size of connection: DN 125
	Pressure rating for connection: PN 16
	Port-to-port length: 800 mm
	Flange size for motor: FF300
	Electrical data:
	Motor type: SIEMENS
	IE Efficiency class: IE3
	Rated power - P2: 22 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-420D/660-725Y V
	Rated current: 42,5-40,5/24,6-23,6 A
	Starting current: 680-680 %
	Cos phi - power factor: 0.8
	Rated speed: 1470 rpm
	Efficiency: IE3 93,0%
	Motor efficiency at full load: 93.0-93.0 %
	Motor efficiency at 3/4 load: 93.7-93.7 %
	Motor efficiency at 1/2 load: 93.7-93.7 %
	Number of poles: 4
	Enclosure class (IEC 34-5): IP55
	Insulation class (IEC 85): F
	Motor No: 99454134
	Others:
	Minimum efficiency index, MEI ≥: 0.70
	Net weight: 428 kg
	Gross weight: 573 kg
	Shipping volume: 1.76 m³
	Country of origin: HU
	Custom tariff no.: 84137051

99474588 TPE 125-340/4 SC-A-F-A-BQQE-QX3 50 Hz

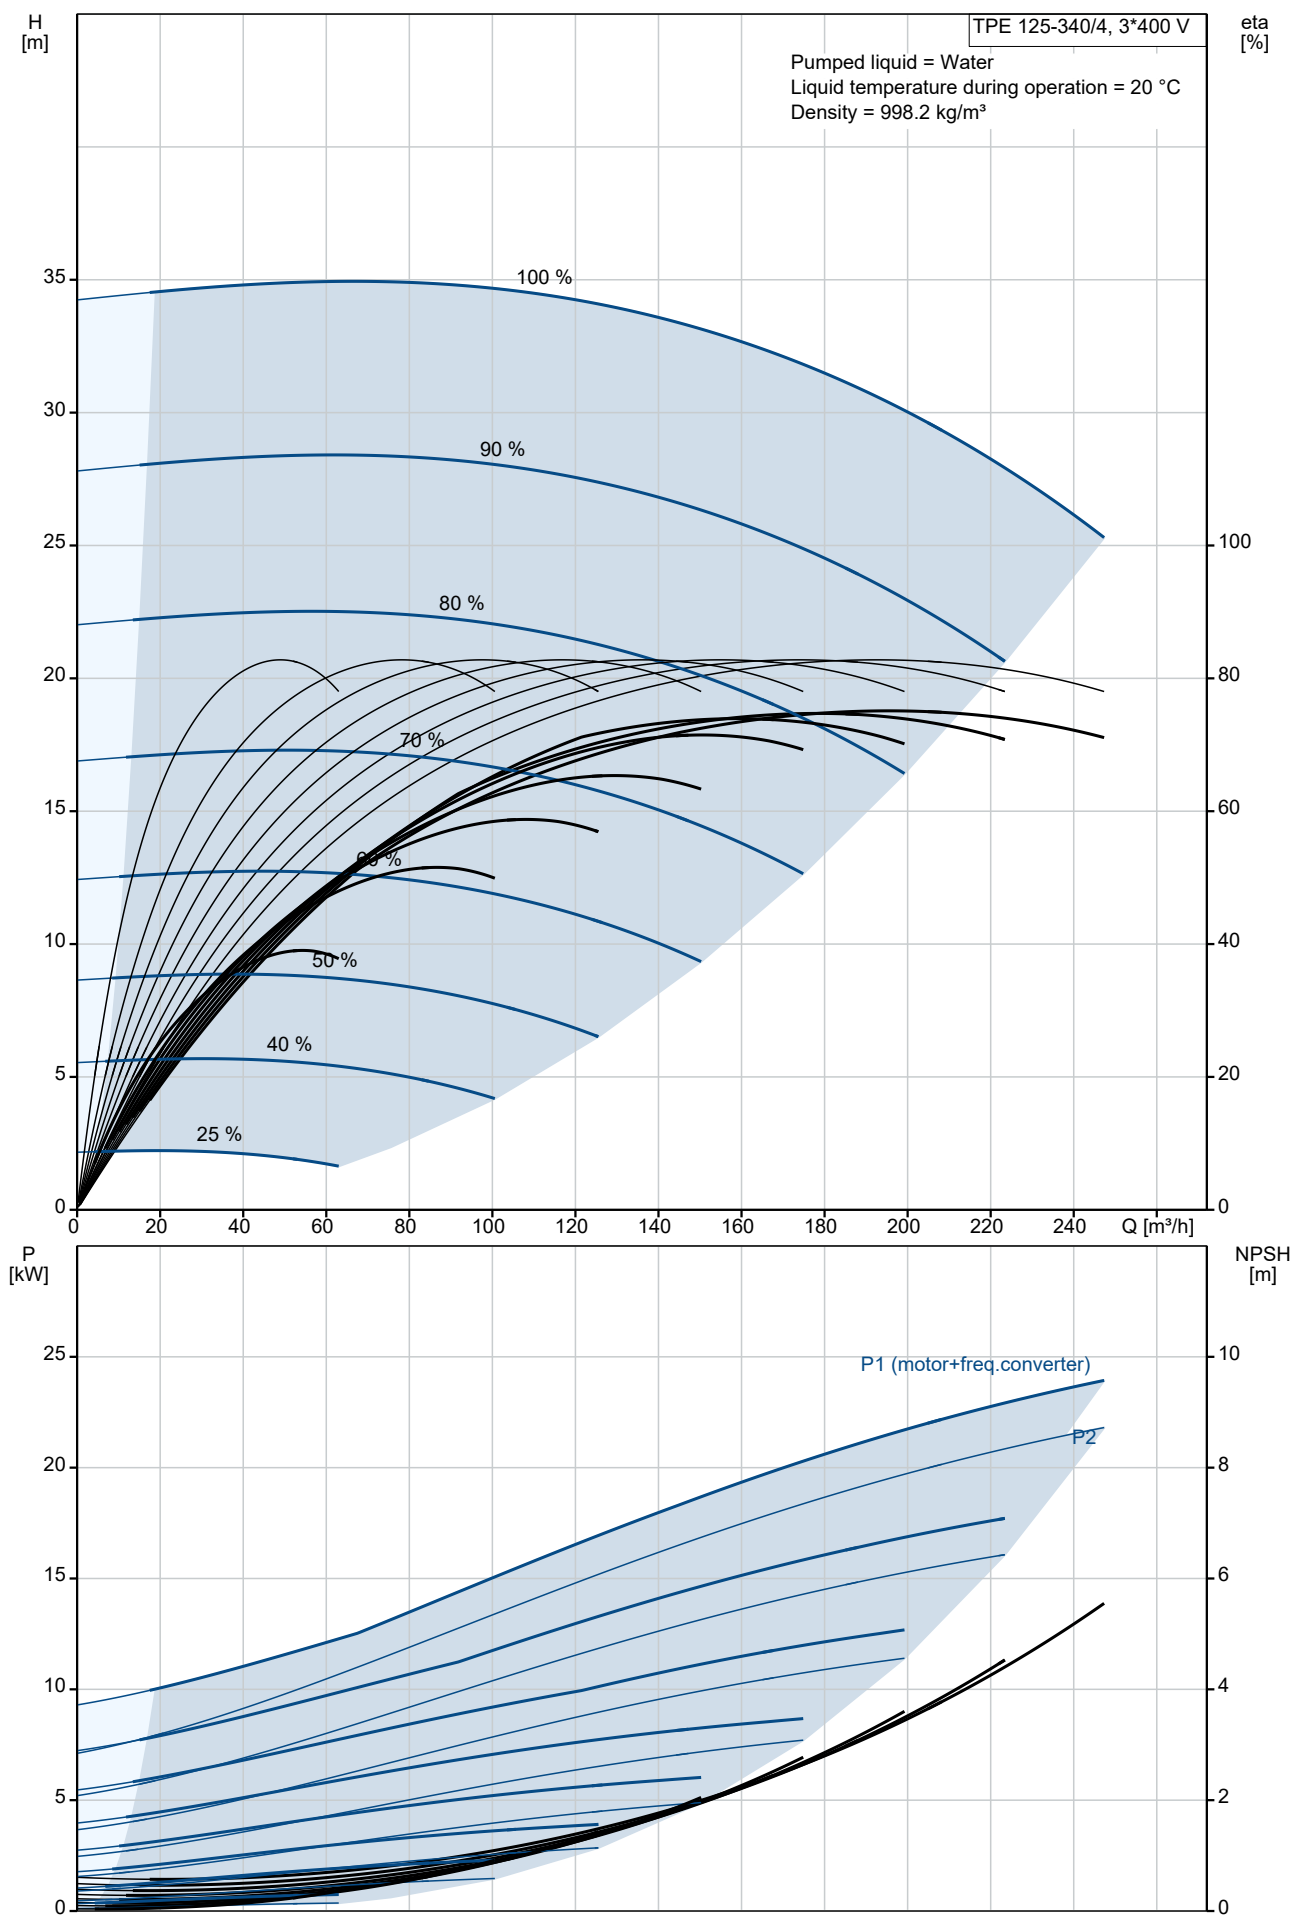


Description	Value
General information:	
Product name:	TPE 125-340/4 SC-A-F-A-BQQE-QX3
Product No:	99474588
EAN number:	5713829711341
Technical:	
Pump speed on which pump data are based:	1470 rpm
Rated flow:	191 m³/h
Rated head:	30.9 m
Maximum head:	340 dm
Actual impeller diameter:	312 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 55 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 120 °C
Type of connection:	DIN
Size of connection:	DN 125
Pressure rating for connection:	PN 16
Port-to-port length:	800 mm
Flange size for motor:	FF300
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	22 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	42,5-40,5/24,6-23,6 A
Starting current:	680-680 %
Cos phi - power factor:	0.8
Rated speed:	1470 rpm
Efficiency:	IE3 93,0%
Motor efficiency at full load:	93.0-93.0 %
Motor efficiency at 3/4 load:	93.7-93.7 %
Motor efficiency at 1/2 load:	93.7-93.7 %
Number of poles:	4
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	99454134
Controls:	
VFD product number:	99448797
Frequency converter:	Built-in
Type of frequency converter:	CUE 3X380-500V IP55 RUG 22KW
Appr. for VFD:	CE, CULUS, C-TICK
Others:	
Minimum efficiency index, MEI ≥:	0.70

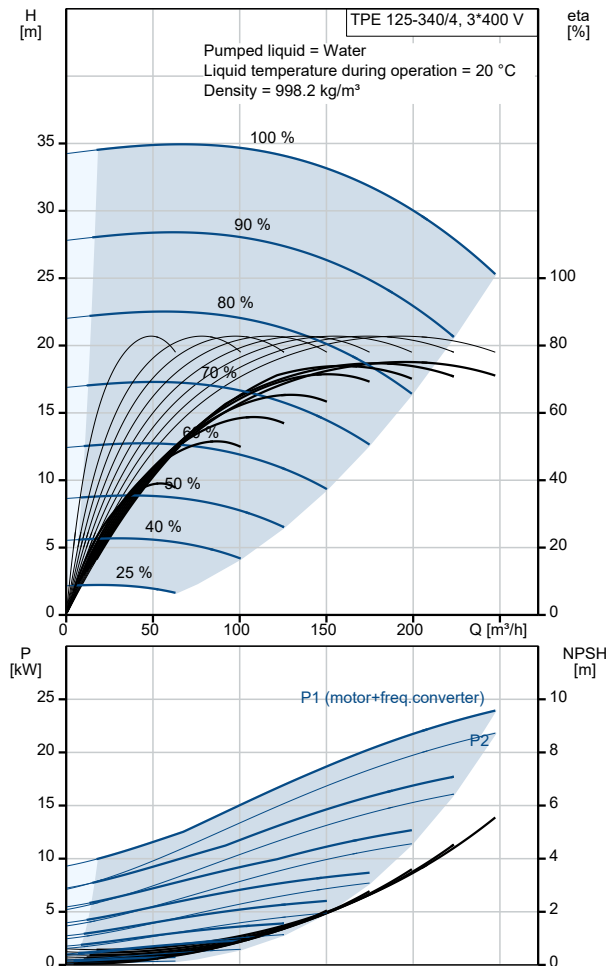

Description	Value
Net weight:	428 kg
Gross weight:	573 kg
Shipping volume:	1.76 m ³
Config. file no:	99465300
Country of origin:	HU
Custom tariff no.:	84137051

99474588 TPE 125-340/4 SC-A-F-A-BQQE-QX3 50 Hz

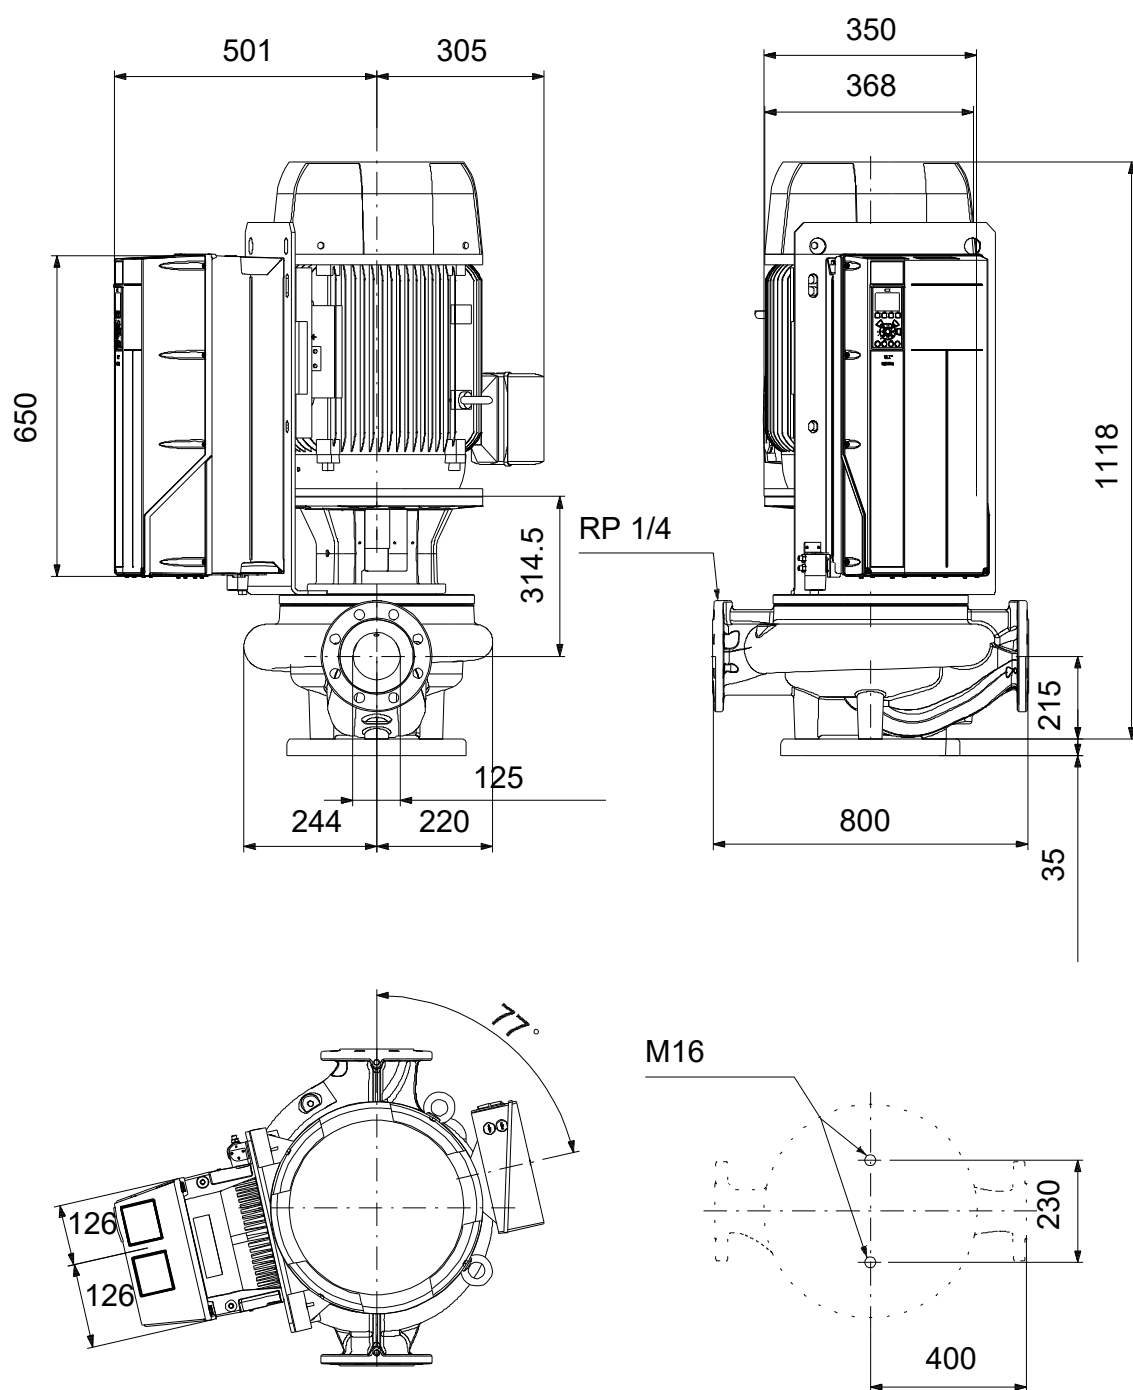

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts TPE 125-340/4, Product No. 99474588
Produced After 2050 (production year and week number)

Pos	Omschrijving	Opmerking tekst	Classificatie Gegevens	Onderdeelnr.	Aantal	Eenheid
- 56	Base plate			96536246	1	pcs
28g	Hex head cap screw	Length (mm): 30 MM			2	
		Thread: M16				
56	Base plate				1	
-	Kit, capillary tubes			99184237	1	pcs
508	Tube				1	
509	Capillary tube.				1	
-	Kit, sensor			96611526	1	pcs
	Cable tie				5	
	Bracket				1	
7a	Combi Slot Torx screw				3	
84c	Disc spring				3	
268	Pan head screw				1	
501	Sensor				1	
505	Bracket	Type: MGE			1	
506	Socket head cap screw				1	
508	Tube				1	
509	Capillary tube.				1	
510	Mounting bush.				2	
511	Cable pin				3	
-	Spare, wear ring			99208807	1	pcs
45	Wear ring				1	
	Control card			99590986	1	pcs
	Control panel			99591437	1	pcs
4	Fan, internal			96901612	1	pcs
6	Fan, main			96809605	1	pcs
5	Power card			96809725	1	pcs
3	SMPS			96809376	1	pcs
	Staybolt			97512560	4	pcs
-	Motor				1	pcs
- 153	Ball bearing			99510992	1	
153	Ball bearing				1	
156	Kit, fan			98507819	1	
151	Kit, fan cover			98920945	1	
18	Plug			96620482	1	pcs
18	Plug			98164277	1	pcs
28	Hex head screw			96620478	4	pcs
36	Hex nut	Thread: M16		96620480	4	pcs
36	Nut	Thread: M12		96620479	4	pcs
49	Impeller			98517635	1	pcs
56	Base plate			99788464	1	pcs
67	Nut	Thread: M18		92526535	1	pcs
72a	O-ring	Diameter: 329,79		92547632	1	pcs
		Material type: EPDM				
		Thickness: 3,53				
72a	O-ring	Diameter: 329,79		92526511	1	pcs
		Material type: EPDM				
		Thickness: 3,53				
72a	O-ring	Diameter: 329,79		97511846	1	pcs
		Material type: EPDM				
		Thickness: 3,53				
72a	O-ring	Diameter: 329,79		97757675	1	pcs
		Material type: EPDM				
		Thickness: 3,53				
510	Mounting bush.			99079267	2	pcs